


**ENGINEERING
YOUR SPRAY SOLUTION**



Precision Spray Nozzles for the Food and Beverage Industry



**Food and Beverage
Industry**

LECHLER – YOUR COMPETENT NOZZLE TECHNOLOGY PARTNER

The food and beverage industry is facing enormous challenges. To offer consumers a more extensive product range improved processes are required.

At the same time, increasingly strict hygiene regulations and increasing rationalisation pressure are demanding highly efficient and safe processes.

Lechler develops and manufactures precision nozzles for various applications. For this we can fall back on all the experience of our 135-year history. The extensive knowledge of nozzles among our 670-strong workforce and a deep understanding of typical industry processes

mean that we have been at the forefront of innovation in nozzle technology for many years.


Today, Lechler manufactures nozzles in Germany, England, Hungary, India, China and the USA. But despite this international alignment, at our heart

we remain a Swabian family company with the typical passion for precision, innovation and the drive to always become that little bit better.

Other subsidiary companies plus more than 40 representative offices round off our global sales network.



WIDE RANGE OF SERVICES FOR YOUR SUCCESS

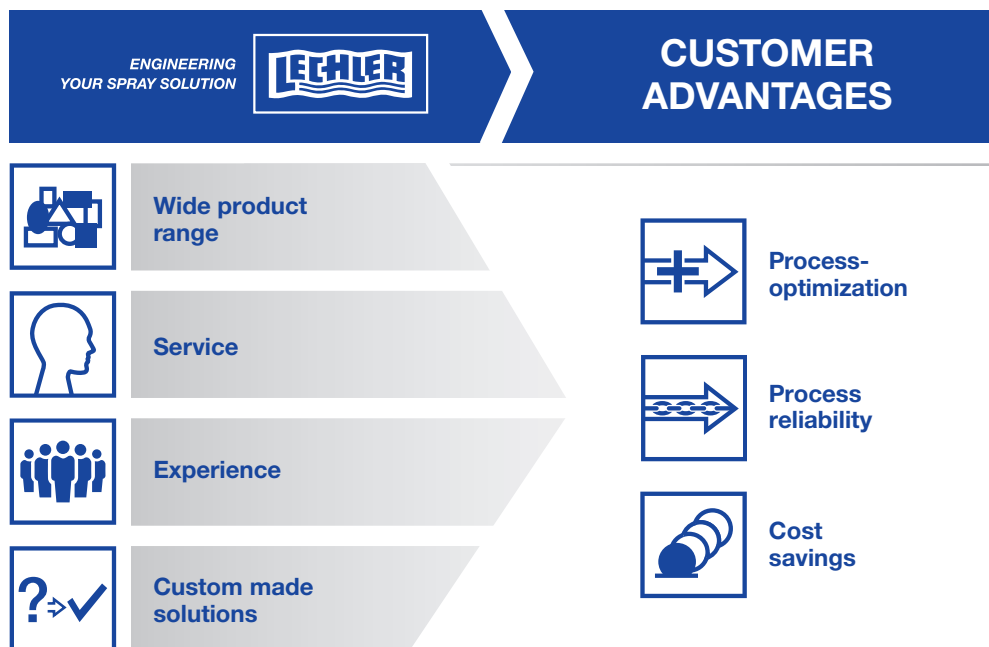

Nozzles for the food and beverage industry

In this brochure we have compiled for you an overview of our tried-and-tested nozzles for the food and beverage industry.

If you cannot find a suitable solution for your particular job, please contact us. Our applications engineers would be happy to develop the optimum solution for your needs.

We will support you with our solutions right along the process chain:



Disinfection and hygiene



Product provision



Product treatment



Filling and packing

Thanks to our detailed knowledge of the individual process steps, we are also able to offer you advice on an individual basis and work out custom solutions for you.

You will find more information, ideas and tools for using nozzle technology and spraying technology at www.lechler.de

CONTENT	Page
Applications	4
Disinfection and hygiene	5
Product provision	6-7
Product treatment	8-9
Filling and packing	10-11
Planning criteria	12-17
Products	
Tank cleaning nozzles	18-36
Pneumatic atomizing nozzles	37-43
Hollow cone nozzles	44-47
Full cone nozzles	48-54
Flat fan nozzles	55-69
Solid stream nozzles	70
Air nozzles	71-73
Accessories	74-77
VarioSpray II	78-79
Other nozzles	80-81
Online Service	82

LECHLER NOZZLES ARE USED IN MANY FIELDS IN THE FOOD AND BEVERAGE INDUSTRY



Product provision



Product treatment



Filling and packing

Tank cleaning / CIP

Belt lubrication

Belt cleaning

- Container washers
- Cleaning of fruit and vegetables
- Pretreatment of equipment
- Humidification
- Bottle and barrel cleaning
- Filter cleaning

- Product cleaning
- Release agent spray deposition
- Dosing
- Coating
- Degassing of liquids
- Concentrating
- Belt cooling
- Spray drying

- Filler cleaning
- Pasteurisation
- Sterilization
- Sorting cans and bottles
- Sorting with air
- Anti-scuffing
- PET bottle cooling



Disinfection and hygiene

- Disinfection
- Hand disinfection
- Boot disinfection
- Room disinfection
- Work sluices




LECHLER NOZZLES FOR DISINFECTION AND HYGIENE APPLICATIONS



Hand disinfection

Hygiene sluices are a fundamental element of production that is as free from germs as possible.


Hollow cone nozzles atomize disinfectants very finely and thereby ensure wide surface coverage and high disinfectant efficiency.

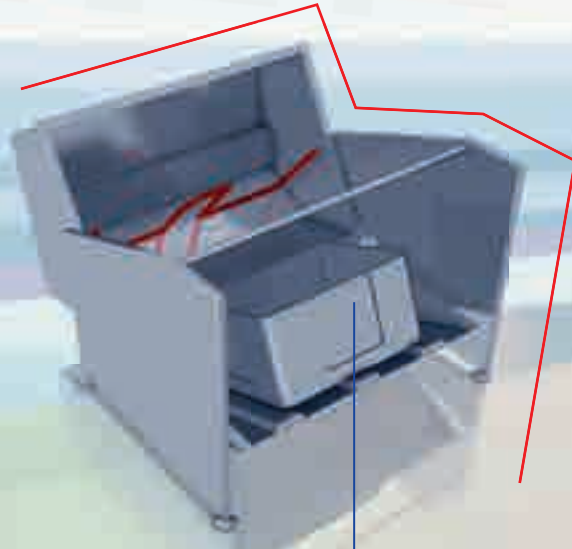

Work equipment disinfection

Short throughput times are needed when cleaning and disinfecting trolleys and containers for production.

Flat fan nozzles with a high spray force are the first choice for that job.

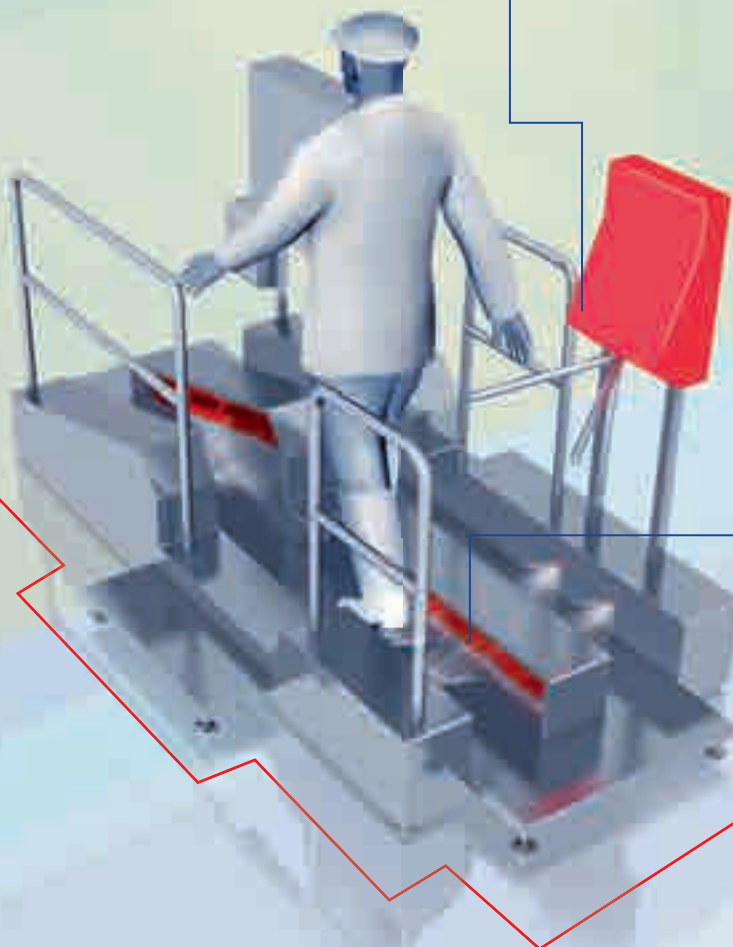

Sole and boot cleaning

These systems are mostly linked in combination with hand disinfectant systems. For cleaning the brushes and spraying with new disinfectant, we recommend our **series 632 and 686 flat fan or tongue-type nozzles**.








LECHLER NOZZLES FOR PRODUCT PROVISION APPLICATIONS

Cleaning of fruit and vegetables

Series 468 full cone nozzles with a 60° spray angle clean cut fruit and vegetables. Simple assembly via an eyelet clamp with bayonet quick release enables the quick exchange of nozzles.

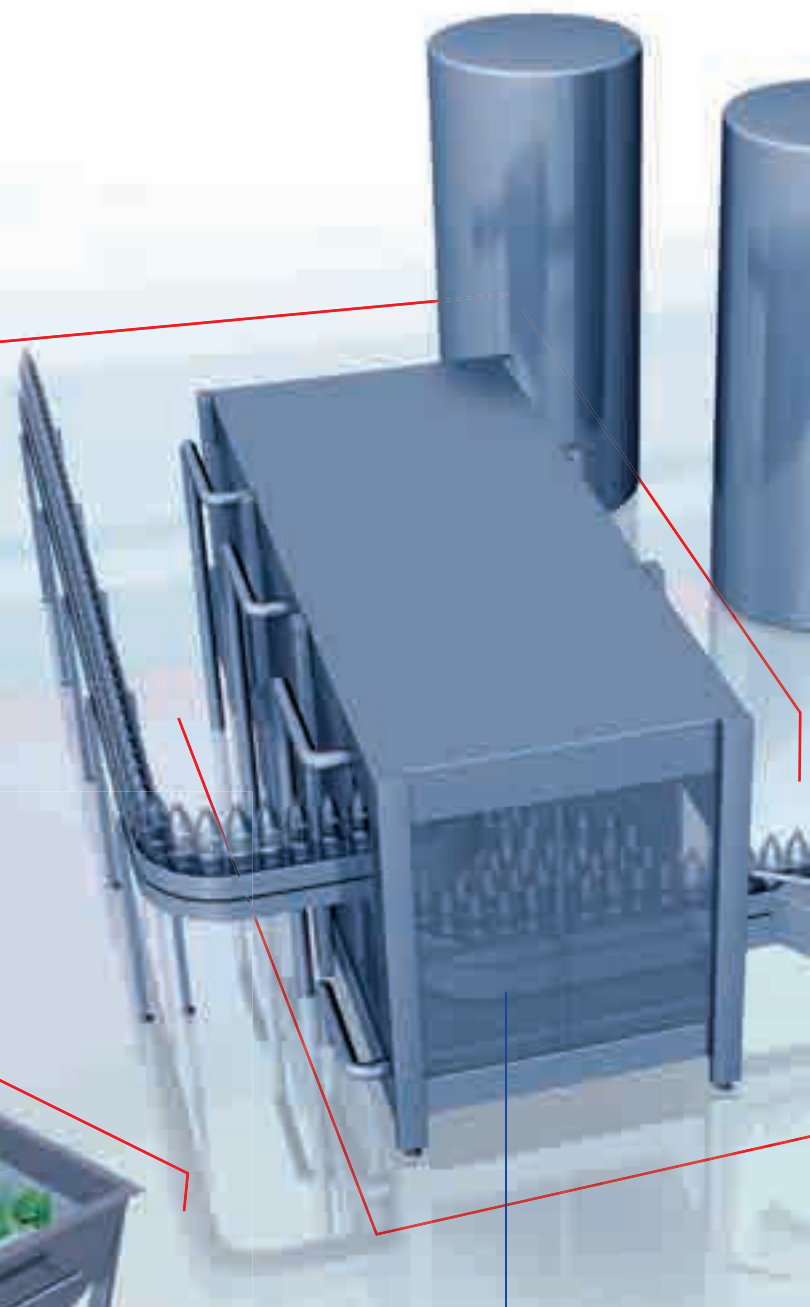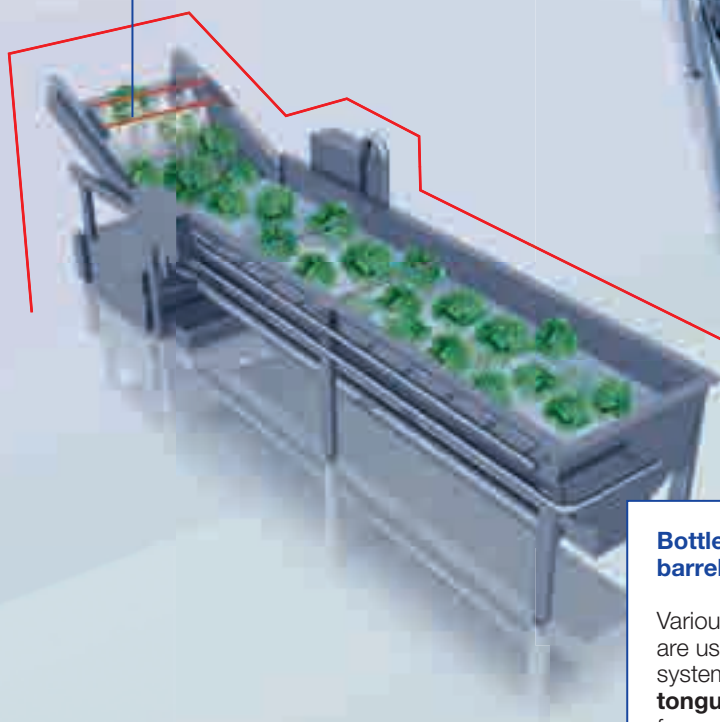


Bottle and barrel cleaning

Various types of nozzles are used in these systems. **Flat fan** and **tongue-type nozzles** for powerful cleaning of heavy soil. **Full cone nozzles** for rinsing and **tank cleaning nozzles** for cleaning the insides of barrels.



Machine cleaning and tank cleaning

High impact tank cleaning machines and **tank cleaning nozzles** with controlled rotation speed were specially developed for tackling very heavy soil. The example shows the **high impact tank cleaning machine 5TM** in a bottle washing machine.

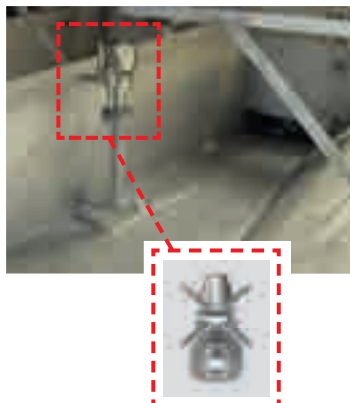

Other nozzle applications in the product provision field

Humidification

Filter cleaning

Foodstuff provision

Animal carcass cleaning

Drum and plate washing systems e.g. for cleaning fish


Cleaning, lubricating cutting knives, belts and other equipment

Sorting procedures with air

Blowing off surfaces with air

Pack washers

In most cases, cleaning is performed with a mixture of immersion baths and spraying stations. The preferred option for the latter is **flat fan nozzles**. **Tongue-type nozzles** produce a particularly powerful flat fan at low pressure.

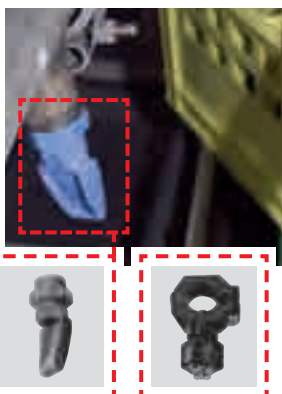




LECHLER NOZZLES FOR PRODUCT TREATMENT APPLICATIONS


Tank cleaning

Optimum tank cleaning requires targeted harmonization with the respective application. Lechler offers a wide range of rotating nozzles and will support you in finding the right arrangement.





Sausage cooling

In the meat-processing industry, sausage products are cooled by means of sausage showers. **Full cone nozzles** or **cluster head nozzles** are frequently used for that.




Can cleaning

Before the foodstuffs are transferred, the cans must be disinfected on both the outside and inside. **Flat fan nozzles** and **full cone nozzles** can be used for this.

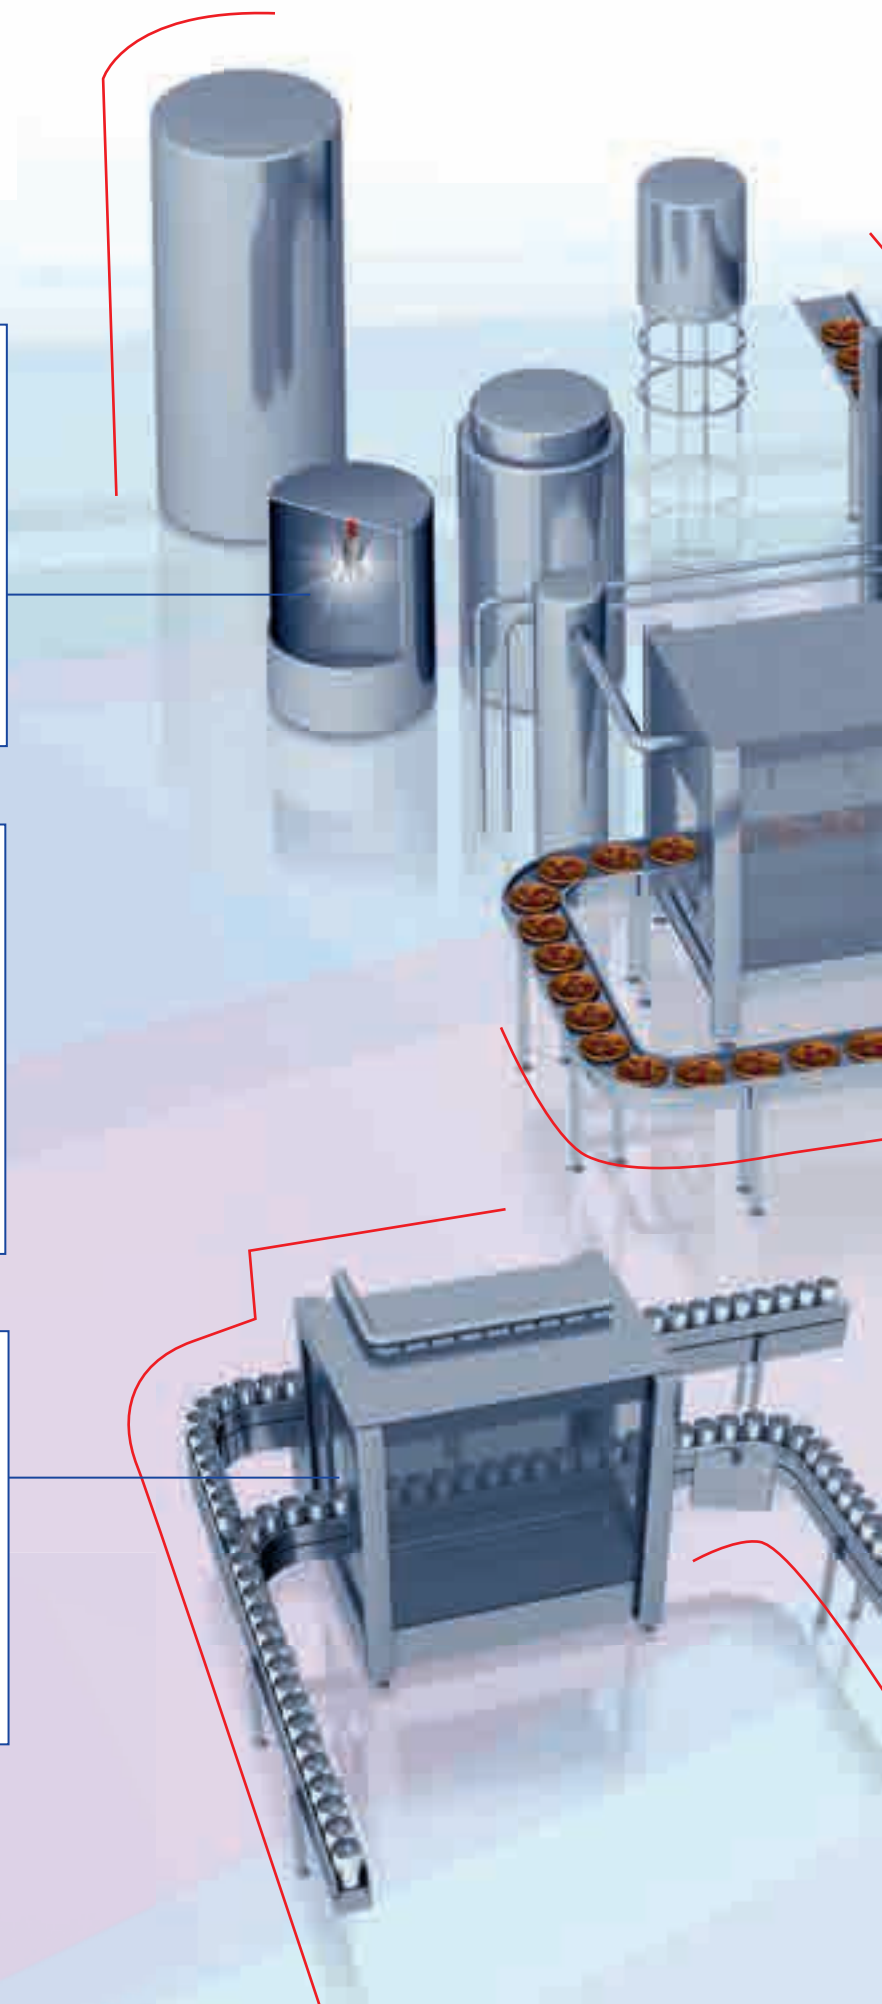



Coating with Vario Spray II

Coating or disinfecting operations are widespread in food processing. The **VarioSpray II nozzle valve system** with pulse width modulation impresses with its enormous flexibility and offers the possibility of spraying very small volumes of fluid with precision.



Belt cooling

With belt cooling, the product (e.g. rissoles) is transported on a belt. The underside of the belt is sprayed with water or a coolant. Due to the fine droplets, **hollow cone nozzles** are often used for this process.





Other applications

- Product cleaning
- Dosing
- Concentrating
- Degassing of liquids
- Release agent spray
- deposition
- Spray drying
- Blanching of vegetables
- Sugar production
- Tobacco processing



LECHLER NOZZLES FOR FILLING AND PACKING


Sterilisation

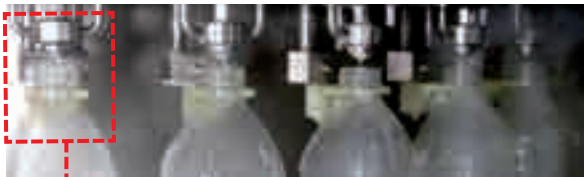

Disinfection is a central step in the production of food and beverage. The example shows **series 136 pneumatic atomizing nozzles** for the internal disinfection of PET bottles.


Filler cleaning

Filling machines are cleaned regularly via a permanently installed nozzle system. For this job, Lechler supplies various **rotating cleaning nozzles** and **hygienically designed nozzles** with FDA and EHEDG approval.



Belt lubrication


This term refers to spraying a soapy solution, known as the belt lubricant, onto the conveyor belt in order to reduce the friction coefficient. Special **series 652 xxx. 8H.03 flat fan nozzles** are used for this.



Pasteurisation

One of the final production stages is the targeted heating of the product in a pasteuriser.

The heat is transferred by means of **full cone or hollow cone nozzles** that apply a dense water film onto the packaging.



Air nozzles

There are numerous applications in which **Lechler air nozzles**, such as the **Whisperblast® series**, are preferred due to the low level of noise produced compared to the standard **air nozzles**.

In the example on the right, **Whisperblast® nozzles** are being used for drying the seal so that the subsequent marking is not smudged.



Other applications

Rinsing of bottles

Anti-scaling

Cooling and moistening

Release agent application

Drying labels and films

Sealing and marking

Cooling with air

Anti-static spraying

WHAT YOU SHOULD KEEP IN MIND WHEN PLANNING

① The fundamentals of cleaning technology

Sinner's circle

Cost reduction by efficient cleaning processes

② Mechanical cleaning effects with Lechler rotating cleaning nozzles

Mechanical cleaning

Comparison of rotating cleaning nozzles and static spray balls

③ Influence of chemistry and temperature

Foam cleaning with nozzles

④ Impact

Surface and spray angle

Pressure

Flow rate

⑤ Spray angle and spraying behaviour

⑥ Viscosity

⑦ Droplet sizes

⑧ Liquid distribution

⑨ Temperature behaviour

⑩ Narrowest cross section

⑪ Connections

⑫ Materials

⑬ Hygiene requirements

⑭ Nozzle wear, material certificates & ATEX

① The fundamentals of cleaning technology

Sinner's circle

The Sinner's circle illustrates the interplay between the four main factors for successful cleaning:

- Chemistry (choice of cleaning agent)
- Mechanical (removal of soil via pressure or friction)
- Temperature (at which cleaning is performed)
- Time (duration of the total cleaning processes)

The proportion of the individual factors as a part of the entire cleaning can be varied, provided that the total is 100 per cent. This results in significant savings potentials.

As a result, the intensification of mechanical cleaning enables the consumption of cleaning agents or the duration of cleaning to be reduced. Consequently, the mechanical factor that takes up a greater part of the Sinner's circle, while the other factors can end up being reduced.

Cost reduction by efficient cleaning processes

This is precisely where our nozzles and rotating cleaning nozzles come into play, having been specially developed for delivering a high mechanical cleaning action. Their greater efficiency helps to permanently reduce ongoing costs for energy and cleaning agents, and also the duration of cleaning. Consequently a one-off investment in improved nozzle technology pays for itself after only a short time.

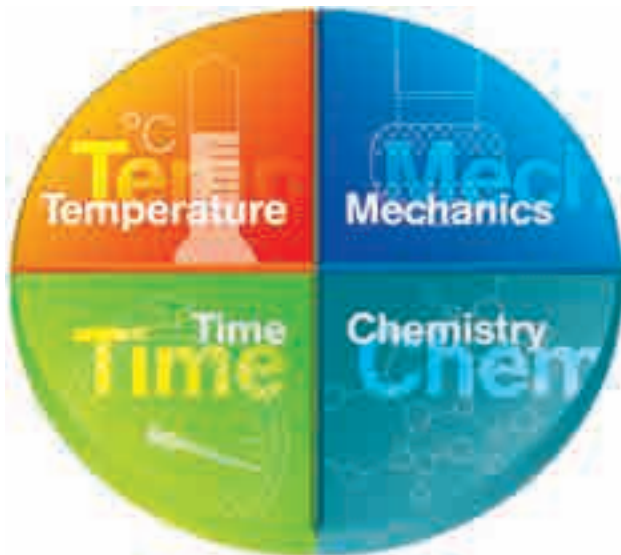


Figure 1: Sinner's circle with equal proportions of the temperature, time, chemistry and mechanical factors.

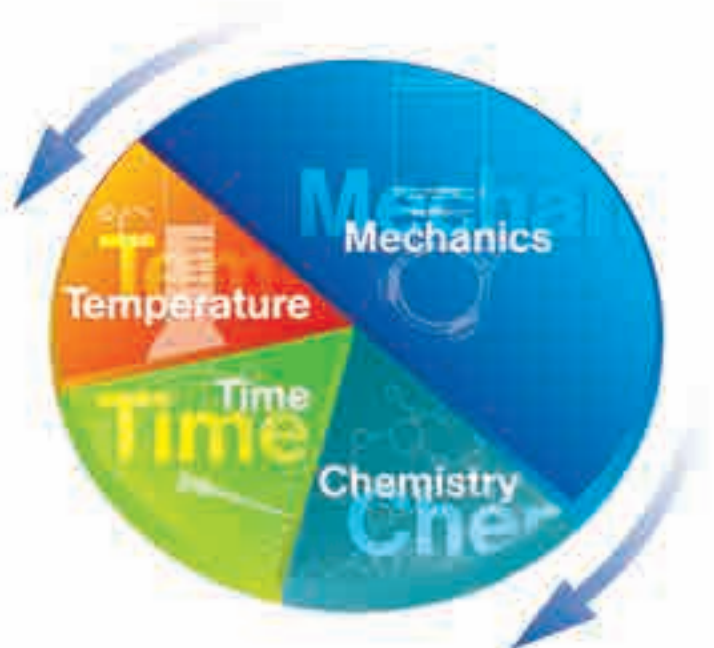


Figure 2: Lechler nozzles and rotating cleaning nozzles have high mechanical cleaning efficiency. This reduces the proportion of the other factors, as well as the resulting costs.

② Mechanical cleaning effects with Lechler rotating cleaning nozzles

Mechanical cleaning

Rotating cleaning nozzles deliver the greatest impact when cleaning the surface area of the tank. To achieve this, large droplets must strike at high speed. This enables thick soil to be removed that cannot dissolve in the cleaning fluid. Important influencing factors are the distance between the nozzle and wall, and the operating pressure.

If one of them is too large, the fluid will break down into smaller droplets (see figs. 3 and 4) and the impact will be reduced.

Besides the impact, the fluid running down the tank wall also has a significant cleaning effect. If the formed film is thick enough, the resulting shear stresses can remove light to moderate soil. In that case, unsprayed patches are less of an issue than is the case during impact cleaning (see fig. 5).

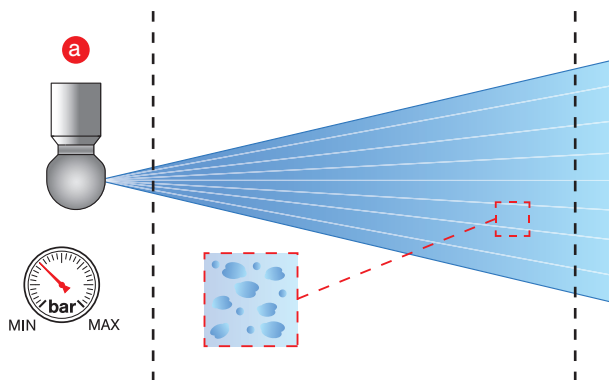


Figure 3: Rotating cleaning nozzles with recommended operating pressure

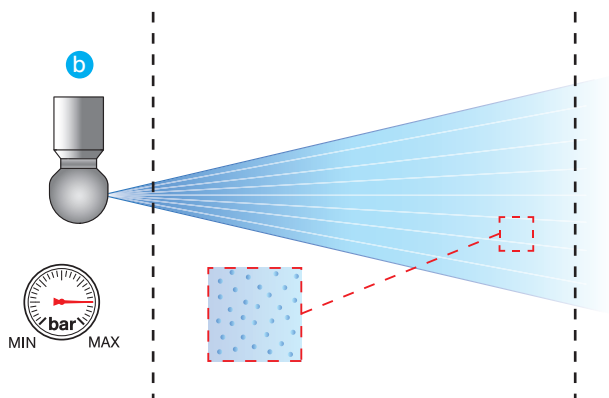


Figure 4: Rotating cleaning nozzles with operating pressure too high

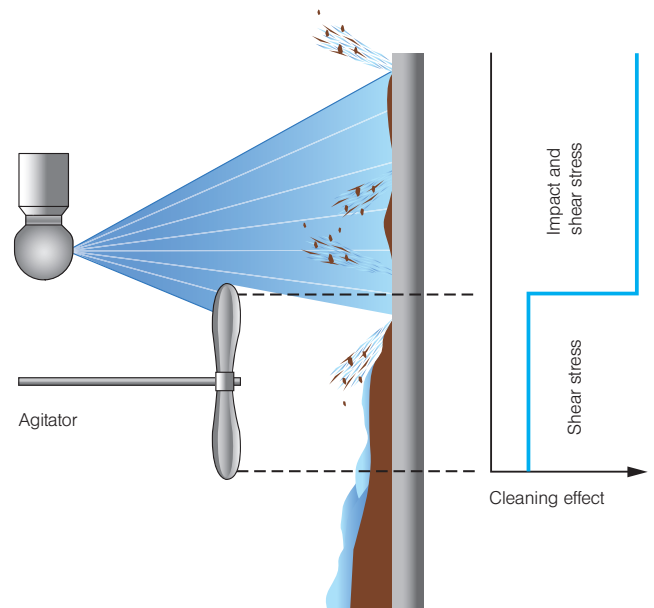


Figure 5: Cleaning mechanisms, impact and shear stress

Comparison of rotating cleaning nozzles and static spray balls

Due to their simple construction, static spray balls are economical and are likely to miss important areas. Whereas rotating cleaning nozzles spray the entire tank wall in a fan-like pattern, the

jets from spray balls strike only in concentrated spots. The remaining surface is simply cleaned by the shear stresses of the fluid running off (see fig. 6). The fluid consumption is therefore significantly greater in comparison with rotating cleaning nozzles.

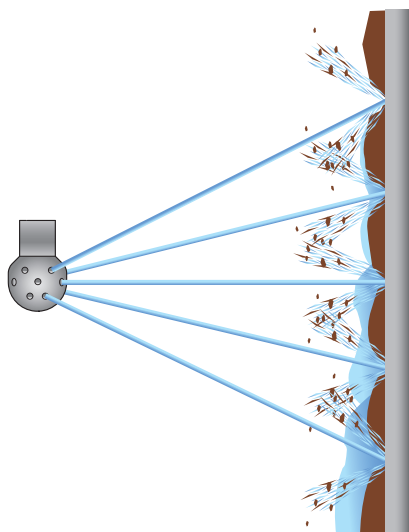


Figure 6: Cleaning with a static spray ball

WHAT YOU SHOULD KEEP IN MIND WHEN PLANNING

③ Influence of chemistry and temperature

The chemical cleaning effect takes part in almost all tank cleaning applications when the soil is dissolved in the cleaning medium or the bonding between soil and tank surface is reduced. Higher temperatures can support the chemical cleaning effect.

Foam cleaning with nozzles

Foam cleaning is primarily based on the chemical cleaning effect. Since the foam sticks more firmly to the surface, it can be more effective than cleaning fluids that drip off quickly. The mechanical cleaning effect plays a correspondingly subordinate role. Here, the task of the nozzle is to distribute the foam evenly. Your end result for this application depends on the type of foam.



Figure 7: Foam cleaning with a Lechler PVDF MicroWhirly

④ Impact

The force of impact when using of a liquid jet on a surface plays an important role in cleaning technology. The ratio of the force (F) to the surface (A) is referred to as the Impact (I).

$$I = \frac{\text{Impact force}}{\text{Impact surface}} = \frac{F}{A} \left[\frac{\text{N}}{\text{m}^2} \right]$$

It can be controlled via the following parameters:

Surface and spray angle

The impact surface is the area where the droplet strikes. The smaller the surface area, the greater the impact values. Nozzles with high impact are, for example, solid stream nozzles and flat fan nozzles with a narrow spray angle.

Pressure

The impact increases linear with the connected pressure. If you double the pressure while maintaining the same flow rate, you also double the impact.

Flow rate

Increasing the flow rate by using a larger nozzle increases the impact, assuming that the other parameters (spray angle, pressure and medium) remain the same.

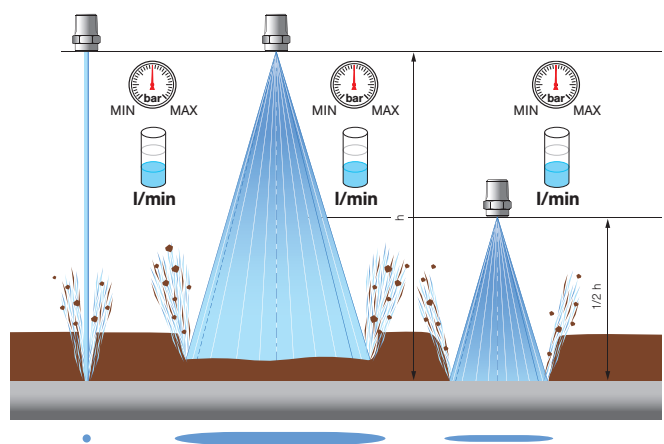


Figure 8: Comparison of the cleaning result of three nozzles with identical pressure and flow rate.

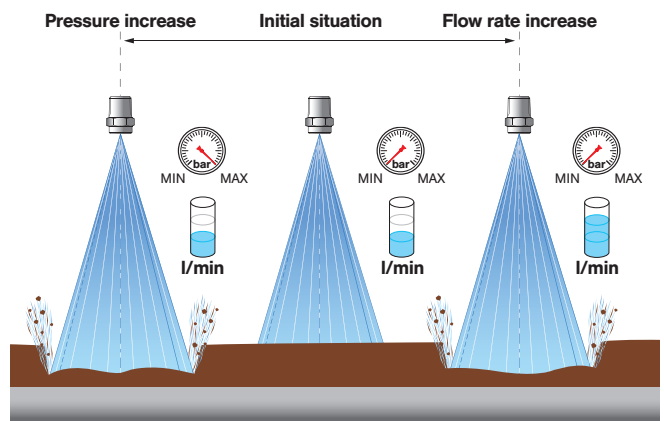



Figure 9: Comparison of the cleaning result of three nozzles with pressure or flow rate increase.

⑤ Spray angle, spraying distance, spraying behaviour

Depending on the version and job, we supply single-fluid nozzles with differently stepped spray angles from 0° (solid stream nozzles) to 360° (tank-cleaning nozzles). The quoted spray angles apply close to the nozzle and in a still atmosphere. Gravity and air flows influence the spray pattern.


Depending on the version, single-fluid nozzles can spray the fluid as a hollow cone, solid stream or flat fan. The solid stream nozzle does not spray, but rather produces a closed jet that hits at a concentrated point. The jet only begins to break up after some distance. Twin-fluid nozzles have a narrow spray angle of approximately 20° due to the high speed at which the compressible medium exits. However, as the distance from the nozzle increases, the spray pattern becomes increasingly less sharply delimited. Twin-fluid nozzles normally produce full cone or flat fan spray patterns.

Height of the nozzle position

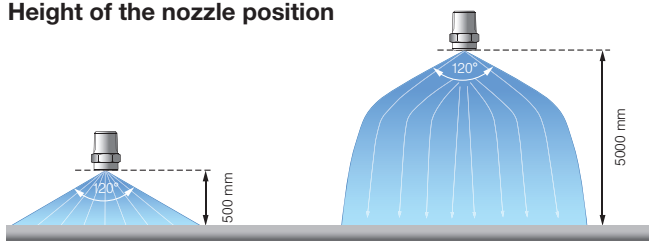

The diagram above illustrates how height influences the spray pattern

Changing the nozzle pressure

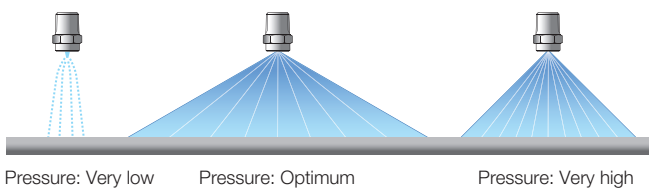

Spraying direction

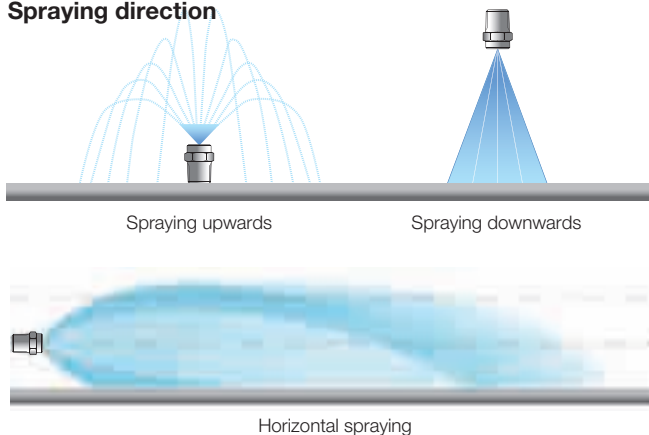


Figure 10: Spray patterns under different working conditions and installations

⑥ Viscosity

Increasing viscosity of the fluid can reduce the flow rate, changes the spray pattern (narrower spraying angle) and allows the droplet spectrum to become coarser.

Depending on the fluid properties, it is possible to counteract this to a certain extent by means of higher pressure. For very viscous substances, it is recommended to use twin-fluid nozzles in most cases. It can also be helpful to take account of the fluid's rheology.



Figure 11: Atomization of gelatine with a Lechler ViscoMist twin-fluid nozzle

⑦ Droplet sizes

Twin-fluid nozzles can produce very fine to extremely fine droplets. The size depends mainly on the flow rate ratio of the compressible medium used (m³/h) to the atomized fluid (l/min): The greater the ratio, the finer the atomization. In the case of single-fluid nozzles however, the decisive factors are pressure, nozzle type and flow rate across the droplet spectrum. Increasing pressure results in finer atomization, but mostly only up to a certain level.



Figure 12: Droplet size measurement-nozzle

Hollow cone nozzles produce very fine to fine droplets at the same pressure and flow rate. Full cone nozzles produce slightly coarser droplet spectrums, and finally flat fan nozzles have the coarsest droplet spectrum.

The following generally applies: Within a series and at a given pressure, nozzles with a lower flow rate produce finer droplet spectrums than nozzles with a higher flow rate.

WHAT YOU SHOULD KEEP IN MIND WHEN PLANNING

⑧ Liquid distribution

An even liquid distribution is crucial to processes such as coating. This requires several nozzles to be arranged next to each other. This is because whereas a single nozzle would produce a parabolic liquid distribution, several nozzles arranged next to each other allows an almost even distribution via overlapping.



Figure 13: Liquid distribution measurement

Measuring the distribution

The liquid distribution in a plane can be determined with the aid of a combination of Plexiglas cylinders. The filling level of the individual cylinders is determined fully automatically. This measuring process can also record the liquid distribution of a nozzle over a moving measuring plane. This enables conveyor belt spraying to be simulated, for example.


⑨ Temperature behaviour of nozzle materials

Applications with temperatures up to 140 °C are very common. These include for example most cleaning applications and sterilisation processes. Applications with higher temperatures are rare, and applications at very low temperatures are even rarer. The general temperature information from material data sheets must always be scrutinised for every single case of nozzle use. Pressure, mechanical stress type, chemistry and time are decisive factors for the suitability of a nozzle material at increased temperatures. Chemical processes can be more aggressive at high temperatures.

A material may be able to withstand them if this temperature occurs for a very short period only. In all materials, high temperatures result in reduced strength values. The mechanical stress type must therefore also be taken into account in high-pressure applications in particular. In addition, vibrations in the system can cause premature failure.

⑩ Narrowest cross section

The risk of a nozzle blocking depends greatly on its narrowest cross section ($\varnothing E$). Experience has shown that for smooth operation, the maximum particle size in the fluid should not exceed one third of the narrowest cross section. Hollow cone and full cone nozzles with axial flow have an internal swirl. Hollow cone and full cone nozzles with inflow at the side (tangential or eccentric design) do not need a swirl and are therefore much less prone to blockages. In the field of flat fan nozzles, our tongue-type nozzles represent a special design that is less susceptible to blockages.

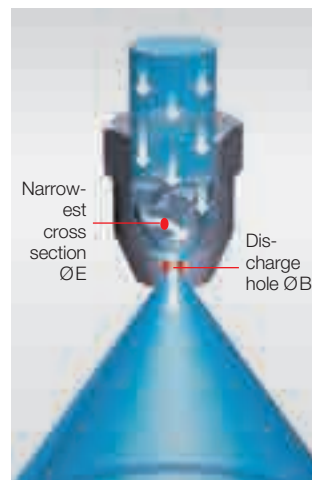

⑪ Connections

Nozzles are mainly constructed with the thread standards ISO 228, DIN 2999 (EN 10226-1) and NPT. A distinction is made here between sealing and non-sealing threads. In the case of non-sealing threads, Teflon® strip or a thread paste is used to provide the seal.

Not all nozzles can be connected with a thread. For these we supply flange solutions conforming to the standards DIN 2527, EN 1092-1 and ASME B 16.5. Aseptic clamp connections (Tri-Clamp connections) conforming to the standard DIN 11864-3 are also possible. Whether a connection other than the standard connection is feasible for a nozzle must be decided on an individual case basis.

Chemistry (accelerated by high temperatures)

Pressure and mechanical stress (e.g. vibrations)

Temperature behaviour of nozzle materials

Time (permanently high temperatures)

12 Materials

Lechler tank and equipment cleaning nozzles are made of extremely high-grade materials that are designed to meet high requirements such as resistance to cleaning chemicals or temperature influences. The large choice of different materials – e.g. stainless steel 316L SS, PVDF, PEEK or PTFE – allows nozzle selection customized to the individual application and operating conditions. In addition, the materials used for the tank and equipment cleaning nozzles are perfectly matched to each other and are thus characterized by very low wear.

The product pages for the individual nozzles provide information on the materials available for the different nozzle types.

In addition to the requirements for material resistance and wear, the materials must also be food grade for use in the beverage, food and pharmaceutical industries. Depending on the application area, the materials must meet different demands.

A large number of the materials used for Lechler tank and equipment cleaning nozzles

comply with the requirements of the FDA or conform to (EC) 1935/2004.

Further information on conformity is provided on the product pages.



The FDA, the U.S. Food & Drug Administration, is a federal agency which monitors those two industries. Materials used in making Lechler products are compliant with the requirements of FDA regulation 21 CFR for use in food applications.



The regulation (EC) No. 1935/2004 of the European Parliament regulates

general safety requirements to all food and beverage contact materials.

Within this regulation, it is additionally stipulated that plastics must comply with (EU) 10/2011.

The respective logo on the product pages indicates which requirements are met.

13 Hygiene requirements

Lechler's tank and equipment cleaning nozzles are designed so that they meet hygiene requirements.

This is reflected, for example, in the self-draining function, minimized dead space in the nozzles as well as an external design without unnecessary gaps and edges. At the same time, the nozzles are designed with the lowest possible surface roughness.

Lechler also offers specially certified nozzles for particular hygiene requirements. The »Teflon® Whirly« and 527 series are 3A-certified, for example.



»3-A® Sanitary Symbol Council Administrative Council for Spray Cleaning Devices (78-01)«

The 3-A® council is an organization in the USA that defines criteria for the cleanability of

components in the dairy and food industry. Components and systems are examined to establish whether germs adhere to surfaces or existing soiling can be removed.

Components and systems are awarded a »3-A® certificate« only if they are easy to clean or if soil cannot be deposited in the first place.



European Hygienic Engineering and Design Group. The EHEDG also checks and

certifies the hygienic design of components. Its procedure is similar to that of 3-A®. The »HygienicWhirly« series is EHEDG-certified.

The respective logo on the product pages indicates which requirements are met.

14 Nozzle wear, material certificates & ATEX

Nozzle Wear

Nozzle wear depends mainly on the operating conditions.

Like with all rotating parts, the bearing assembly is subjected to the highest amount of stress. The following operating conditions accelerate wear:

- Solids in the fluid and hard particles
- Use in a chemically aggressive environment
- Spraying of chemically aggressive substances
- Operating the nozzle above the recommended pressure range or temperature.

Material certificates

Material certificates in accordance with DIN EN 10204 can be issued on request for almost all Lechler tank and equipment cleaning nozzles.

ATEX




Lechler offers specially designed nozzle series for use in explosive atmospheres. The »MicroWhirly« and »Whirly« series have an

ATEX approval that was issued by an external certification institute.



Rotating cleaning nozzle »PicoWhirly« Series 500.234



- Very compact design
- Self rotating
- Rotating solid jets
- Completely made of stainless steel

Material:

Stainless steel 316L SS

Max. temperature:

200 °C

Recommended

operating pressure:

3 bar

Installation:


Operation in every direction is possible

Filtration:

Line strainer with a mesh size of 0.3 mm/50 mesh

Bearing:

Kolsterised slide bearing

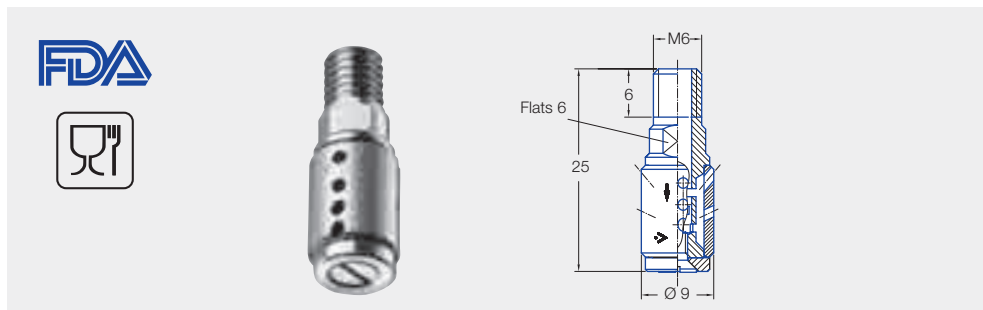

Spray angle 	Ordering number Type	E Ø [mm]	V̇ [l/min]				Max. tank diameter [m]
			p [bar] (p _{max} = 5 bar)				
			1	2	3	at 40 psi [US gal./ min]	
300° 	500.234.G9.00	1.8	5.7	8.0	9.8	2.5	0.9

E = Narrowest free cross-section

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

Operation with compressed air only for short-term usage. Operation above the recommended operating pressure means higher wear and smaller droplets. This might have adverse effects on the cleaning result.



Function video

Scan the QR-code
or go to:
[www.lechler.de/
PicoWhirlyGB](http://www.lechler.de/PicoWhirlyGB)



Rotating cleaning nozzle »MicroWhirly« Series 566



- Compact design
- Self rotating
- Effective flat jet nozzles

Material:

Stainless steel 316L SS
and PEEK

Max. temperature:

130 °C

Recommended operating pressure:

2 bar

Installation:


Operation in every direction
is possible

Filtration:


Line strainer with a mesh size
of 0.3 mm/50 mesh

Bearing:


Slide bearing made of PEEK

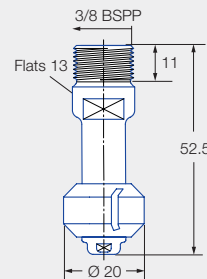

3/8 BSPP male thread

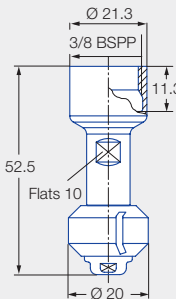

3/8 BSPP female thread



Slip-on connection
ASME - BPE 1997 (OD-Tube)



Function video

Scan the QR-code
or go to:
[www.lechler.de/
MicroWhirlyGB](http://www.lechler.de/MicroWhirlyGB)



**ATEX version
on request**

Spray angle 	Ordering number				E Ø [mm]	V [l/min]				Max. tank diameter [m]
	Type	Connection				p [bar] (p _{max} = 6 bar)				
		3/8 BSPP* male	3/8 BSPP* female	3/4" Slip-on		1	2	3	at 40 psi [US gal./ min]	
180° 	566.873.1Y	AE	AF	TF	1	12	15	18	5	1.6
	566.933.1Y	AE	AF	TF	2.4	15	21	26	7	1.7
180° 	566.874.1Y	AE	AF	TF	1	12	15	18	5	1.6
	566.934.1Y	AE	AF	TF	2.4	15	21	26	7	1.7
360° 	566.879.1Y	AE	AF	TF	1	12	15	18	5	1.6
	566.939.1Y	AE	AF	TF	2.4	15	21	26	7	1.7

E = Narrowest free cross-section · *NPT and weld-on version on request

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

Operation with compressed air only for short-term usage. Operation above the recommended operating pressure means higher wear and smaller droplets. This might have adverse effects on the cleaning result.

Slip-on information: - R-clip made of stainless steel 316L SS is included (Ordering number: 095.022.1Y.50.94.E)
- Depending on diameter of the adapter the flow rate can increase due to leakage between connecting pipe and rotating cleaning nozzle.

Example **Type** + **Connection** = **Ordering no.**
of ordering: 566.873.1Y + AE = 566.873.1Y.AE



Rotating cleaning nozzle »PVDF MicroWhirly« Series 500.191



- Very inexpensive
- Self rotating
- Effective flat jet nozzles
- Completely made of PVDF

Material:
PVDF

Max. temperature:
90 °C

Recommended operating pressure:
2 bar

Installation:
Operation in every direction is possible


Filtration:
Line strainer with a mesh size of 0.3 mm/50 mesh

Bearing:
Slide bearing made of PVDF



Function video

Scan the QR-code
or go to:
**www.lechler.de/
PVDFMicroWhirlyGB**

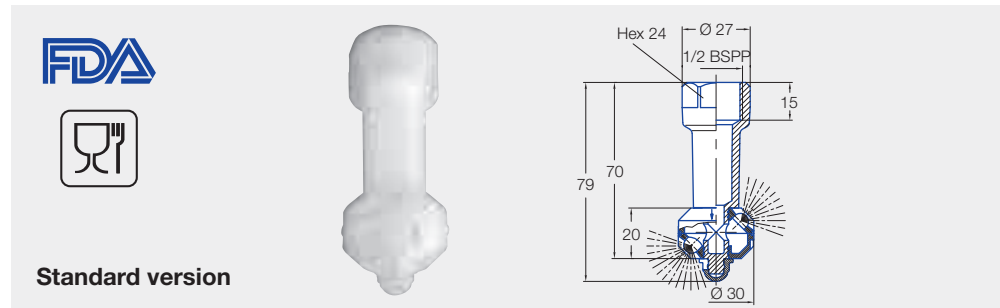


Standard version

Spray angle 	Ordering number Type	E Ø [mm]	Connection BSPP female	V̇ [l/min]				Max. tank diameter [m]
				p [bar] (p _{max} = 5 bar)				
				1	2	3	at 40 psi [US gal./ min]	
180° 	500.191.5E.02	2.2	1/2"	9	13	16	4	0.8
180° 	500.191.5E.01	2.2	1/2"	9	13	16	4	0.8
270° 	500.191.5E.31	2.2	1/2"	14	20	25	6	1.1
360° 	500.191.5E.00	2.2	1/2"	14	20	25	6	1.1

E = Narrowest free cross-section

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

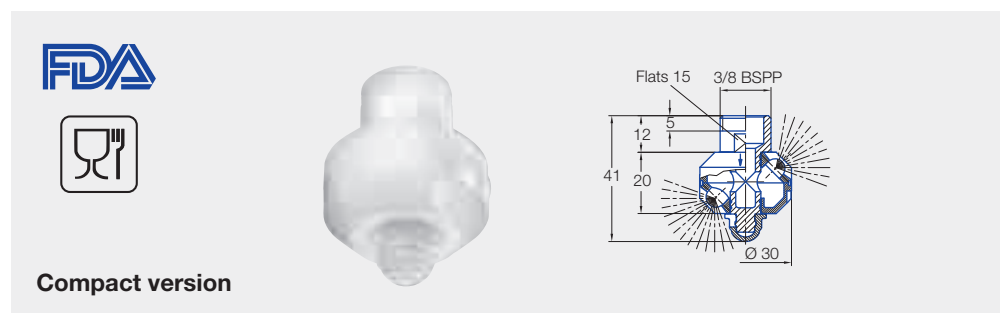


Compact version

Spray angle 	Ordering number Type	E Ø [mm]	Connection BSPP male	V̇ [l/min]				Max. tank diameter [m]
				p [bar] (p _{max} = 5 bar)				
				1	2	3	at 40 psi [US gal./ min]	
180° 	500.191.5E.21	2.2	3/8"	9	13	16	4	0.8
360° 	500.191.5E.22	2.2	3/8"	14	20	25	6	1.1

E = Narrowest free cross-section

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.



Stainless steel 316L SS,
PEEK, EHEDG-Version:
O-ring made of EPDM

100 °C,
short-term up to 140 °C


Operation in every direction
is possible

Line strainer with a mesh size of 0.3 mm/50 mesh

Slide bearing made of PEEK



Scan the QR-code
or go to:
**[www.lechler.de/
HygienicWhirlyGB](http://www.lechler.de/HygienicWhirlyGB)**

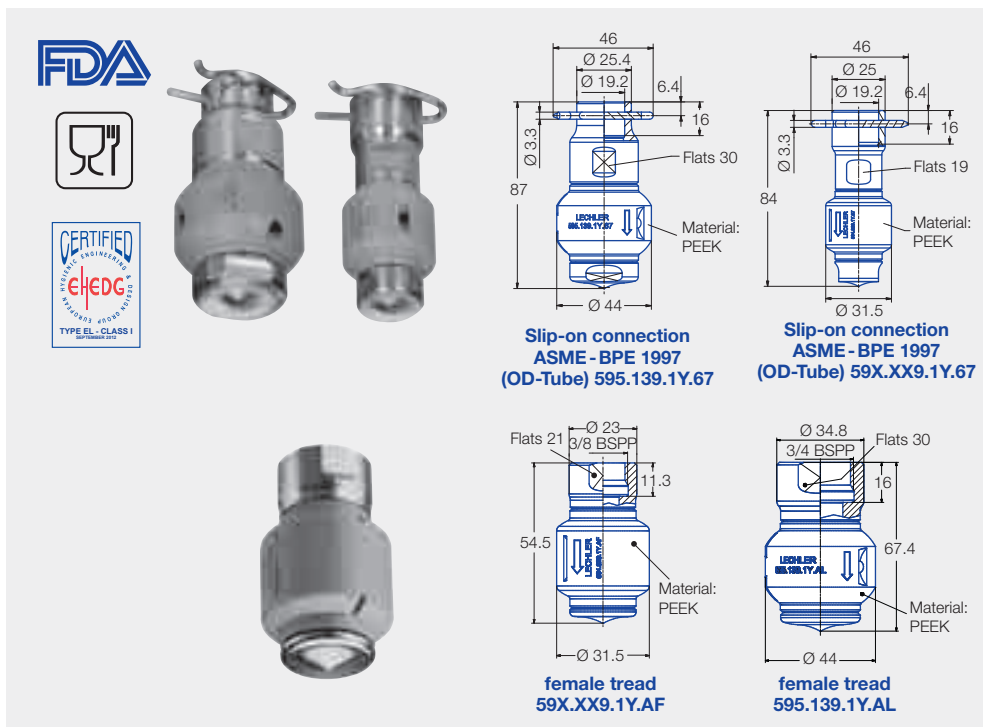

Spray angle 	Ordering no.				E Ø [mm]	V [l/min]					Max tank diameter [m]
	Type	Connection				p [bar] (p _{max} = 5 bar)					
		3/8 BSPP* female	3/4 BSPP* female	3/4" Slip-on EHEDG version		0.5	1	2	3	at 40 psi [US gal./ min]	
360° 	594.829.1Y	AF	-	67	1.7	6	8	11	14	3	0.8
	594.879.1Y	AF	-	67	2.5	8	11	15	18	5	1.2
	595.009.1Y	AF	-	67	4.0	16	22	32	39	10	1.5
	595.049.1Y	AF	-	67	4.2	20	28	40	49	12	2.0
	595.139.1Y	-	AL	67	5.0	34	47	67	82	21	2.7


E = Narrowest free cross-section · *NPT on request

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

Slip-on information: - R-clip made of stainless steel 316L SS is included (Ordering number: 095.022.1Y.50.94.E).
- Depending on diameter of the adapter the flow rate can increase due to leakage between connecting pipe and rotating cleaning nozzle.

Example	Type	+	Connection	=	Ordering no.
of ordering:	594.829.1Y	+	AF	=	594.829.1Y.AF


Rotating lance

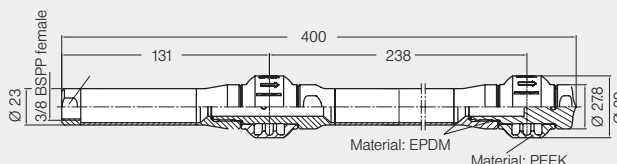

Available on request.



Rotating cleaning nozzle »NanoSpinner« Series 5NA



- Entirely made from stainless steel
- Self-rotating
- Efficient slot design
- Modern double ball bearing

Materials:

Stainless steel 316L SS,
Stainless steel 440C SS

Max. temperature:

140 °C

Recommended operating pressure:

2 bar

Installation:

Operation in every direction is possible

Filtration:

Line strainer with a mesh size of 0.1 mm/170 mesh

Bearing:

Double ball bearing made of 440C SS




Function video

Scan the QR-code
or go to:
[www.lechler.de/
NanoSpinnerGB](http://www.lechler.de/NanoSpinnerGB)



**ATEX version
on request**

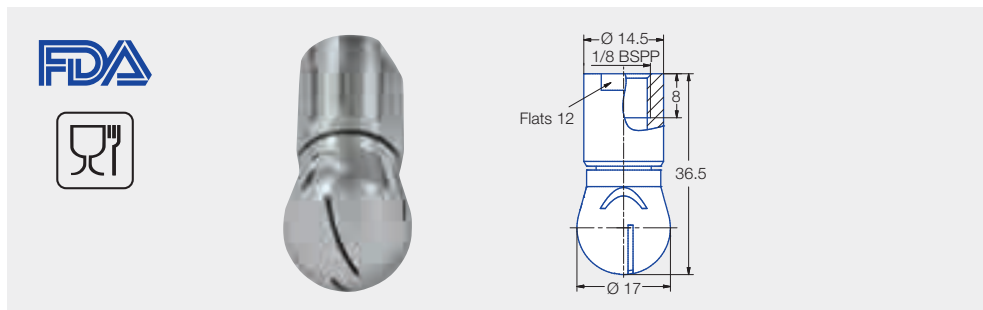

Spray angle 	Ordering number	E Ø [mm]	V̇ [l/min]				Max. tank diameter [m]
	Type		p [bar] (p _{max} = 5 bar)				
			1	2	3	at 40 psi [US gal./ min]	
360° 	5NA.879.1Y.AB	0.5	11	15	18	5	1.4
	5NA.929.1Y.AB	0.5	14	20	25	6	1.6

E = Narrowest free cross-section

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

Operation with compressed air only for short-term usage. Operation above the recommended operating pressure means higher wear and smaller droplets. This might have adverse effects on the cleaning result.



Rotating cleaning nozzle »MicroSpinner« Series 5MC



- Entirely made from stainless steel
- Self-rotating
- Efficient slot design
- Modern double ball bearing

Materials:

Stainless steel 316L SS,
Stainless steel 440C SS

Max. temperature:

140 °C

Recommended operating pressure:

2 bar

Installation:

Operation in every direction is possible

Filtration:

Line strainer with a mesh size of 0.1 mm/170 mesh

Bearing:

Double ball bearing made of 440C SS




Function video


Scan the QR-code or go to:
www.lechler.de/SpinnerGB



ATEX version on request

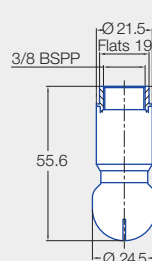

Thread connection

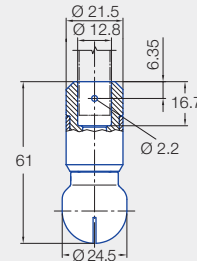

Slip-on connection
ASME - BPE 1997 (OD-Tube)

Spray angle 	Ordering number					E Ø [mm]	V̇ [l/min]				Max. tank diameter [m]
	Type	Mat. no.		Connection*			p [bar] (p _{max} = 5 bar)				
		1Y 316L SS	21** Hastelloy C22	3/8 BSPP	1/2" Slip-on		1	2	3	at 40 psi [US gal./min]	
60° 	5MC.042			AF	TF05	3.0	28	40	49	12	-
180° 	5MC.004			AF	TF05	0.8	22	32	39	10	1.8
360° 	5MC.049			AF	TF05	0.9	28	39	48	12	1.8

E = Narrowest free cross-section

*NPT, more slip-on sizes and weld-on versions on request

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

Operation with compressed air only for short-term usage. Operation above the recommended operating pressure means higher wear and smaller droplets. This might have adverse effects on the cleaning result.

Slip-on information: - R-clip made of stainless steel 316L SS is included (Ordering no.: 095.013.1E.05.59).

- Depending on diameter of the adapter the flow rate can increase due to leakage between connecting pipe and rotating cleaning nozzle.

Example of ordering: Type + Connection = Ordering no.
5MC.042.1Y + AF = 5MC.042.1Y.AF



Rotating cleaning nozzle »MiniSpinner« Series 5MI

- Entirely made from stainless steel
- Self-rotating
- Efficient slot design
- Modern double ball bearing

Materials:

Stainless steel 316L SS,
Stainless steel 440C SS

Max. temperature:

140 °C

Recommended

operating pressure:

2 bar

Installation:

Operation in every direction
is possible

Filtration:

Line strainer with a mesh size
of 0.1 mm/170 mesh

Bearing:

Double ball bearing made
of 440C SS




Function video

Scan the QR-code
or go to:

[www.lechler.de/
SpinnerGB](http://www.lechler.de/SpinnerGB)



**ATEX version
on request**

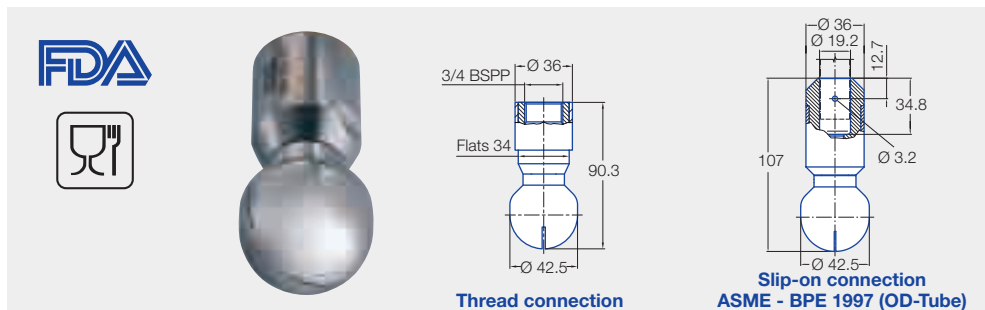

Spray angle 	Ordering no.						E Ø [mm]	V [l/min]				Max. tank diameter [m]
	Type	Mat. no.		Connection*				p [bar] (p _{max} = 5 bar)				
		1Y 316L SS	21** Hastelloy C22	1/2 BSPP	3/4 BSPP	3/4" Slip-on		1	2	3	at 40 psi [US gal./ min]	
60° 	5MI.162	○	○	AH	-	TF07	2.6	45	63	77	20	-
180° 	5MI.113	○	○	-	AL	TF07	1.0	47	67	82	21	2.6
180° 	5MI.114	○	○	-	AL	TF07	1.0	47	67	82	21	2.6
360° 	5MI.054	○	○	-	AL	TF07	0.5	21	30	37	9	1.8
	5MI.074	○	○	-	AL	TF07	0.6	35	49	60	15	2.1
	5MI.014	○	○	-	AL	TF07	0.9	49	69	85	21	2.3
	5MI.209	○	○	-	AL	TF07	1.5	71	100	122	31	2.6

E = Narrowest free cross-section

*NPT, more slip-on sizes and weld-on versions on request

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

Operation with compressed air only for short-term usage. Operation above the recommended operating pressure means higher wear and smaller droplets. This might have adverse effects on the cleaning result.

Slip-on information: - R-clip made of stainless steel 316L SS is included (Ordering no.: 095.022.1Y.50.60).

- Depending on diameter of the adapter the flow rate can increase due to leakage between connecting pipe and rotating cleaning nozzle.

Example **Type** + **Material no.** + **Connection** = **Ordering no.**
of ordering: 5MI.162. + 1Y + AH = 5MI.162.1Y.AH



Rotating cleaning nozzle »Whirly« Series 569



- Popular and proven design
- Powerful flat jets
- Wide range of flow rates

Materials:

Stainless steel 316L SS,
PEEK, Rulon 641

Max. temperature:

140 °C

Recommended operating pressure:

2 bar

Installation:


Operation in every direction
is possible; in horizontal
installation position
no rotating until 2 bar

Filtration:


Line strainer with a mesh size
of 0.1 mm/170 mesh

Bearing:


Double ball bearing made
of stainless steel

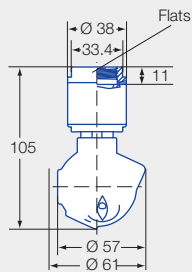

3/4 BSPP female thread

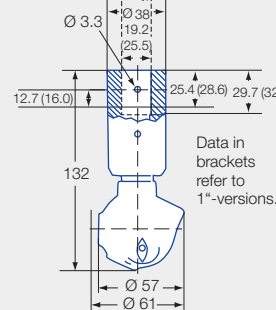

Slip-on connection
ASME - BPE 1997 (OD-Tube)

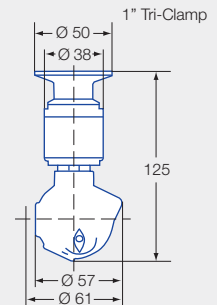

1" Tri-Clamp



Function video

Scan the QR-code
or go to:
[www.lechler.de/
WhirlyGB](http://www.lechler.de/WhirlyGB)



**ATEX version
on request**

Spray angle	Ordering no.					E Ø [mm]	V [l/min]				Max. tank diameter [m]	
	Type	Connection					p [bar] (p _{max} = 6 bar)					
		3/4 BSPP* female	3/4" Slip-on	1" Slip-on	1" Tri- Clamp		1	2	3	at 40 psi [US gal./ min]		
	270°	569.055.1Y	AL	TF07	TF10	10	3.6	36	48	62	15	1.8
		569.135.1Y	AL	TF07	TF10	10	4.8	52	71	87	22	2.1
		569.195.1Y	AL	TF07	TF10	10	5.6	69	97	119	30	2.6
	270°	569.056.1Y	AL	TF07	TF10	10	3.6	36	48	62	15	1.8
		569.106.1Y	AL	TF07	TF10	10	4.8	41	58	71	18	2.1
		569.196.1Y	AL	TF07	TF10	10	5.6	69	97	119	30	2.6
	360°	569.059.1Y	AL	TF07	TF10	10	3.2	36	48	62	15	1.8
		569.139.1Y	AL	TF07	TF10	10	3.6	52	71	87	22	2.1
		569.199.1Y	AL	TF07	TF10	10	4.8	69	97	119	30	2.6
		569.279.1Y	AL	TF07	TF10	10	7.1	103	145	178	45	3.0

E = Narrowest free cross-section · *NPT on request

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

Operation with compressed air only for short-term usage. Operation above the recommended operating pressure means higher wear and smaller droplets. This might have adverse effects on the cleaning result.

Slip-on information: - R-clip made of stainless steel 316L SS is included (Ordering no.: 095.022.1Y.50.60.E).

- Depending on diameter of the adapter the flow rate can increase due to leakage between connecting pipe and rotating cleaning nozzle.

Example	Type	+	Connection	=	Ordering no.
of ordering:	569.055.1Y.	+	AL	=	569.055.1Y.AL



Pop-up rotating cleaning nozzle »PopUp Whirly« Series 5P2



- For installation in the tank wall
- Cleaning with foam is possible
- Self rotating

Materials:

Stainless steel 316L SS,
stainless steel 316Ti SS
(spring),
stainless steel 316 SS
(snap ring),
PEEK (slide-bearing),
FKM (O-ring)

Max. temperature:
140 °C

Recommended operating pressure:

2 bar,
opening pressure
approx. 1.0 bar,
closing pressure
approx. 0.5 bar

Installation:

Operation in every direction
is possible

Filtration:

Line strainer with a mesh size
of 0.3 mm/50 mesh


Bearing:

Slide bearing made of PEEK



Function video

Scan the QR-code
or go to:
**www.lechler.de/
PopUpWhirlyGB**

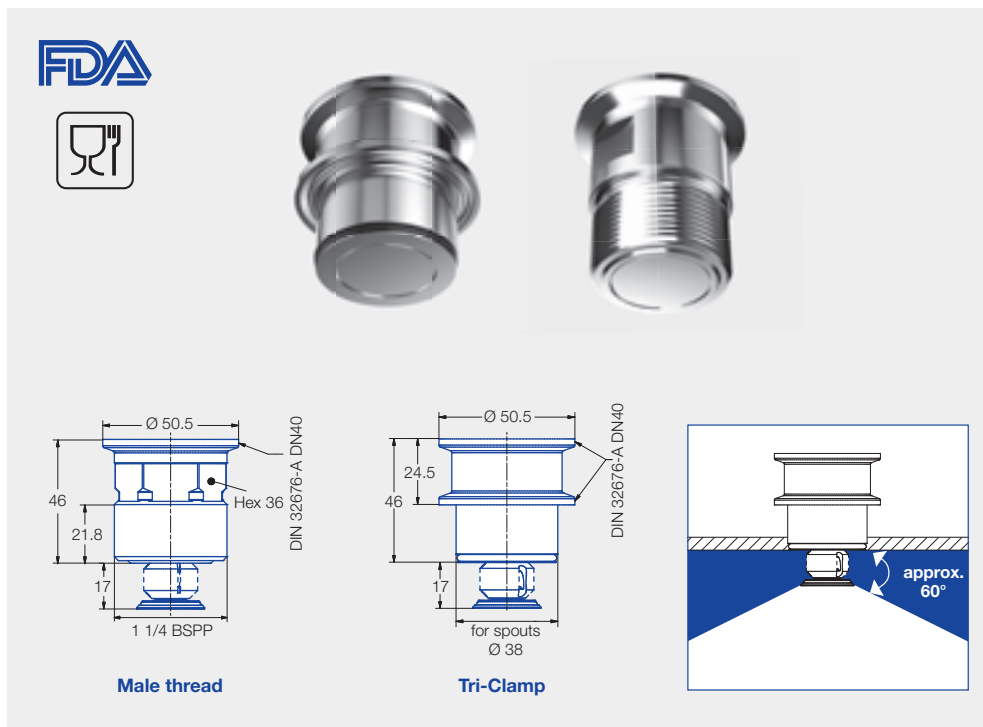


Spray angle 	Ordering no.	Tank connection		E Ø [mm]	V [l/min]				Max. tank diameter [m]
					p [bar] (p _{max} = 6 bar)				
		1 1/4 BSPP	Tri- Clamp		1	2	3	at 40 psi [US gal./ min]	
	5P2.873.1Y.AP	○	-	1.1	10.6	15.0	18.4	5	0.8
	5P2.873.1Y.00	-	○	1.1	10.6	15.0	18.4	5	0.8
	5P2.923.1Y.AP	○	-	1.1	14.1	20.0	24.5	6	1.0
	5P2.923.1Y.00	-	○	1.1	14.1	20.0	24.5	6	1.0

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.


Operation with compressed air only for short-term usage. Operation above the recommended operating pressure means higher wear and smaller droplets. This might have adverse effects on the cleaning result.

Nozzle installation


Via thread in idle position



Via Tri-Clamp in operating position

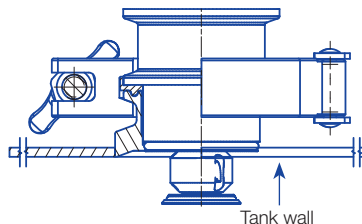

Weld-in flange for Tri-Clamp-Version



Ordering number

050.020.1Y.01.00

Material

316L SS

Information

Gasket with a thickness of 2 mm must be used if the nozzle is installed with this weld-in flange.



Pop-up rotating cleaning nozzle »PopUp Whirly« Series 5P3



- For installation in the tank wall
- Cleaning with foam is possible
- Self rotating

Materials:

Stainless steel 316L SS,
stainless steel 316Ti SS
(spring),
stainless steel 316 SS
(snap ring),
PEEK (slide-bearing),
FKM (O-ring)

Max. temperature:
140 °C

Recommended operating pressure:

2 bar,
opening pressure
approx. 0.9 bar,
closing pressure
approx. 0.5 bar

Installation:

Operation in every direction
is possible

Filtration:

Line strainer with a mesh size
of 0.3 mm/50 mesh


Bearing:

Slide bearing made of PEEK




Function video


Scan the QR-code
or go to:
www.lechler.de/PopupWhirlyGB

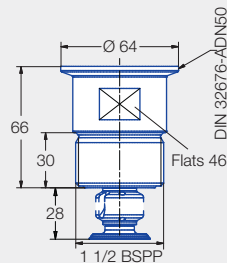

Male thread

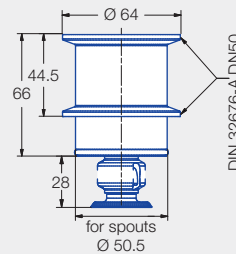

Tri-Clamp




Spray angle 	Ordering no.	Tank connection		E Ø [mm]	V̇ [l/min]				Max. tank diameter [m]
					p [bar] (p _{max} = 6 bar)				
		1 1/2 BSPP	Tri-Clamp		1	2	3	at 40 psi [US gal./ min]	
	5P3.043.1Y.AR		-	1.2	28.3	40	49	12	2.2
	5P3.043.1Y.00	-		1.2	28.3	40	49	12	2.2

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.


Operation with compressed air only for short-term usage. Operation above the recommended operating pressure means higher wear and smaller droplets. This might have adverse effects on the cleaning result.

Nozzle installation


Via thread in idle position



Via Tri-Clamp in operating position

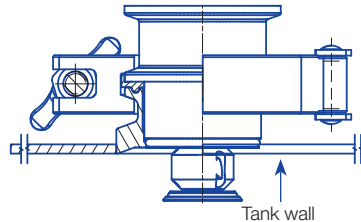

Weld-in flange for Tri-Clamp-Version



Ordering number

050.020.1Y.01.01

Material


316L SS

Information

Gasket with a thickness of 2 mm must be used if the nozzle is installed with this weld-in flange.



Rotating cleaning nozzle »Teflon® Whirly« Series 573 / 583



- Self rotating
- Rotating solid jets
- Recommended for tanks made of glass and enamel
- 3A® version available

Materials:

PTFE (Teflon®)

Max. temperature:

95 °C

(Versions for use with higher temperature (130 °C) on request)

Recommended operating pressure:

2 bar

Installation:

Operation in every direction is possible

Filtration:

Line strainer with a mesh size of 0.3 mm/50 mesh

Bearing:

Slide bearing made of PTFE



Function video

Scan the QR-code or go to:

www.lechler.de/TeflonWhirlyGB


Operation with compressed air only for short-term usage. Operation above the recommended operating pressure means higher wear and smaller droplets. This might have adverse effects on the cleaning result. Teflon® is a registered trademark of E. I. DuPont De Nemours and Company.

Slip-on information:

- R-clip made of stainless steel 316L SS is included

(Ordering number:
R-clip 1: 095.022.1Y.50.88.E,
R-clip 2: 095.022.1Y.50.60.E).

- Depending on diameter of the adapter the flow rate can increase due to leakage between connecting pipe and rotating cleaning nozzle.

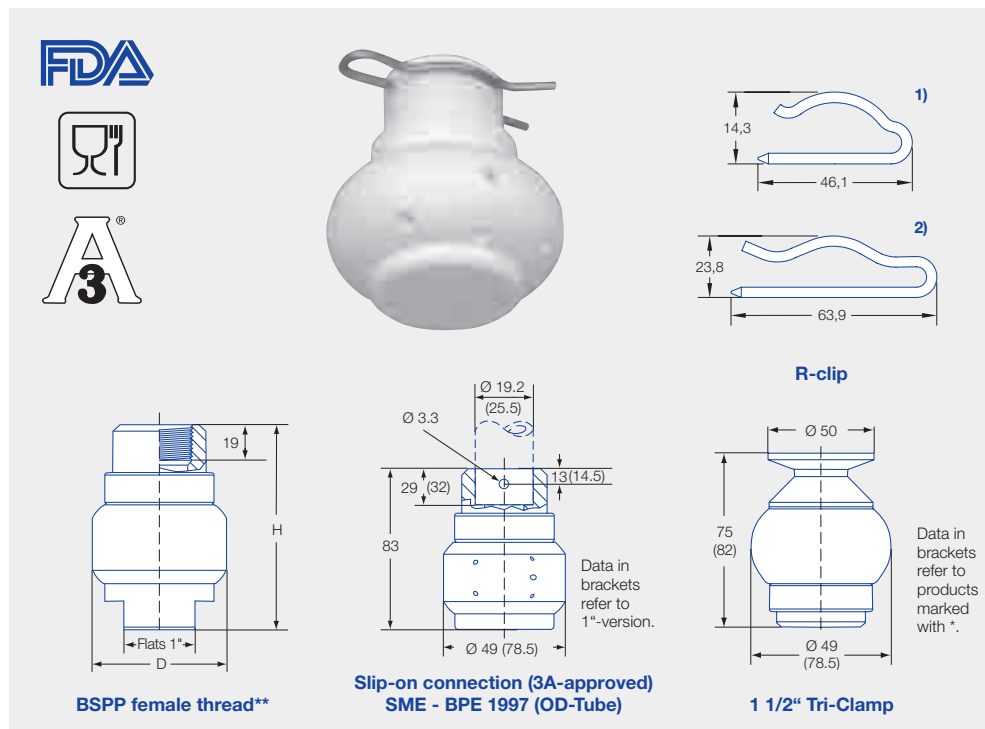

Spray angle 	R-clip	Ordering no.						E Ø [mm]	V [l/min]				Dimensions for female thread version		Max. tank diameter [m]
		Type	Connection						p [bar] (p _{max} = 6 bar)				Height H [mm]	Dia-meter D [mm]	
			3/4 BSPP	1 BSPP	3/4" Slip-on	1" Slip-on	1 1/2" Tri-Clamp		1	2	3	at 40 psi [US gal./min]			
	1)	583.114.55	AL	-	TF07	TF10	15	2.1	47	67	82	21	74	49	2.5
	1)	583.264.55	AL	-	TF07	TF10	15	3.3	103	145	178	45	74	49	2.8
	2)	583.344.55	-	AN	-	TF10	15*	7.1	159	225	276	70	100	78.5	3.2
	1)	573.114.55	AL	-	TF07	TF10	15	2.1	47	67	82	21	74	49	2.5
	1)	573.264.55	AL	-	TF07	TF10	15	3.3	103	145	178	45	74	49	2.8
	2)	573.344.55	-	AN	-	TF10	15*	7.1	159	225	276	70	100	78.5	3.2
	1)	583.116.55	AL	-	TF07	TF10	15	2.4	47	67	82	21	74	49	2.5
	1)	583.266.55	AL	-	TF07	TF10	15	3.4	103	145	178	45	74	49	2.8
	2)	583.346.55	-	AN	-	TF10	15*	5.9	159	225	276	70	100	78.5	3.2
	1)	573.116.55	AL	-	TF07	TF10	15	2.4	47	67	82	21	74	49	2.5
	1)	573.266.55	AL	-	TF07	TF10	15	3.4	103	145	178	45	74	49	2.8
	2)	573.346.55	-	AN	-	TF10	15*	5.9	159	225	276	70	100	78.5	3.2
	1)	583.119.55	AL	-	TF07	TF10	15	1.8	41	58	71	18	74	49	2.4
	1)	583.209.55	AL	-	TF07	TF10	15	3.5	71	100	122	31	74	49	2.5
	1)	583.269.55	AL	-	TF07	TF10	15	4.8	103	145	178	45	74	49	2.8
	2)	583.279.55	-	AN	-	TF10	15*	3.7	106	150	184	47	100	78.5	3.0
	2)	583.349.55	-	AN	-	TF10	15*	5.6	159	225	276	70	100	78.5	3.2


E = Narrowest free cross-section · ** NPT on request

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

Example	Type	+	Connection	=	Ordering no.
of ordering:	583.114.55.	+	AL	=	583.114.55.AL



Rotating cleaning nozzle »Gyro« Series 577



- Self rotating
- Effective flat jet nozzles
- Large free cross sections, less prone to clogging

Max. tank diameter:
5.5 m

Materials:
Stainless steel 316L SS,
PTFE

Max. temperature:
90 °C

Recommended operating pressure:
3 bar

Installation:
Vertically facing downward

Filtration:
Line strainer with a mesh size of 0.3 mm/50 mesh


Bearing:
Slide bearing made of PTFE

Accessories:
Spare parts set consisting of: top seal, bottom seal, bolt, nut, sleeve, instructions for use



Function video

Scan the QR-code or go to:
www.lechler.de/GyroGB



Spray angle	Ordering no.			V [l/min]					Dimensions	
	Type	Connection		p [bar] (p _{max} = 5 bar)					Height H [mm]	Diameter D [mm]
		1 BSPP*	2 BSPP*	1	2	3	5	at 40 psi [US gal./min]		
180° 	577.283.1Y	AN	-	115	163	200	258	50	72	118
	577.363.1Y	AN	-	182	258	316	408	80	72	118
	577.403.1Y	-	AW	228	322	394	509	100	103	156
	577.433.1Y	-	AW	273	386	473	610	120	103	156
	577.523.1Y	-	AW	452	639	783	1010	170	103	156
180° 	577.284.1Y	AN	-	115	163	200	258	50	72	118
	577.364.1Y	AN	-	182	258	316	408	80	72	118
	577.404.1Y	-	AW	228	322	394	509	100	103	156
	577.434.1Y	-	AW	273	386	473	610	120	103	156
	577.494.1Y	-	AW	380	538	659	851	170	103	156
270° 	577.285.1Y	AN	-	115	163	200	258	50	72	118
	577.365.1Y	AN	-	182	258	316	408	80	72	118
	577.405.1Y	-	AW	228	322	394	509	100	103	156
	577.435.1Y	-	AW	273	386	473	610	120	103	156
	577.495.1Y	-	AW	380	538	659	851	170	103	156
360° 	577.289.1Y	AN	-	115	163	200	258	50	72	118
	577.369.1Y	AN	-	182	258	316	408	80	72	118
	577.409.1Y	-	AW	228	322	394	509	100	103	156
	577.439.1Y	-	AW	273	386	473	610	120	103	156
	577.499.1Y	-	AW	380	538	659	851	170	103	156

* NPT on request

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

Operation with compressed air only for short-term usage. Operation above the recommended operating pressure means higher wear and smaller droplets. This might have adverse effects on the cleaning result.

Example	Type	+	Connection	= Ordering no.
for Ordering:	577.283.1Y.	+	AN	= 577.283.1Y.AN



Rotating cleaning nozzle »XactClean® HP« Series 5S2 / 5S3



- Controlled rotation
- Powerful flat jet nozzles
- Very efficient tank cleaning nozzle

Materials:

Stainless steel 316L SS,
Stainless steel 316 SS,
Stainless steel 632 SS, PEEK,
PTFE, Zirconium oxide,
EPDM

Max. temperature:

95 °C

Recommended

operating pressure:

5 bar

Installation:

Operation in every direction
is possible

Filtration:

Line strainer with a mesh size
of 0.3 mm/50 mesh

Bearing:

Double ball bearing

Rotation monitoring


sensor:

Sensor compatible,
Info: see page 34



Function video

Scan the QR-code
or go to:
**www.lechler.de/
XactCleanHPGB**

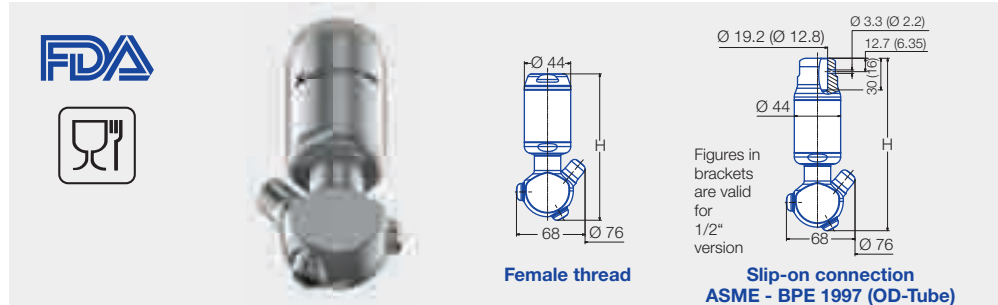

Nozzle dimensions [mm]

Connection	H
AF	148
AH	149
AL	139
AN	139
TF05	150
TF07	164



**ATEX version
on request**

Spray angle 	Ordering no.							E Ø [mm]	V [l/min]				Max. tank diameter [m]
	Type	Connection							p [bar] (p _{max} = 15 bar)				
		3/8 BSPP* female	1/2 BSPP* female	3/4 BSPP* female	1 BSPP* female	1/2" Slip-on	3/4" Slip-on		2	5	10	at 40 psi [US gal./ min]	
270° 	5S2.955.1Y	AF	AH	-	-	TF05	-	2.0	25	40	57	7.8	3.5
	5S3.055.1Y	-	AH	-	-	TF05	-	2.0	41	65	92	12.8	4.0
	5S3.115.1Y	-	AH	AL	-	-	TF07	2.0	60	94	133	18.4	6.0
	5S3.185.1Y	-	-	AL	-	-	TF07	2.0	89	141	199	27.7	7.0
	5S3.235.1Y	-	-	AL	-	-	TF07	2.0	111	175	248	34.3	7.5
	5S3.265.1Y	-	-	AL	AN	-	TF07	2.0	135	213	301	41.8	8.0
270° 	5S2.956.1Y	AF	AH	-	-	TF05	-	2.0	25	40	57	7.8	3.5
	5S3.056.1Y	-	AH	-	-	TF05	-	2.0	41	65	92	12.8	4.0
	5S3.116.1Y	-	AH	AL	-	-	TF07	2.0	60	94	133	18.4	6.0
	5S3.186.1Y	-	-	AL	-	-	TF07	2.0	89	141	199	27.7	7.0
	5S3.236.1Y	-	-	AL	-	-	TF07	2.0	111	175	248	34.3	7.5
	5S3.266.1Y	-	-	AL	AN	-	TF07	2.0	135	213	301	41.8	8.0
360° 	5S2.959.1Y	AF	AH	-	-	TF05	-	1.7	25	40	57	7.8	3.5
	5S3.059.1Y	-	AH	-	-	TF05	-	2.0	41	65	92	12.8	4.0
	5S3.119.1Y	-	AH	AL	-	-	TF07	2.0	60	94	133	18.4	6.0
	5S3.189.1Y	-	-	AL	-	-	TF07	2.0	89	141	199	27.7	7.0
	5S3.239.1Y	-	-	AL	-	-	TF07	2.0	111	175	248	34.3	7.5
	5S3.269.1Y	-	-	AL	AN	-	TF07	2.0	135	213	301	41.8	8.0

E = Narrowest free cross-section · *NPT on request

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

Operation with compressed air only for short-term usage. Operation above the recommended operating pressure means higher wear and smaller droplets. This might have adverse effects on the cleaning result.

Slip-on information:

- R-clip made of stainless steel 316L SS is included (Ordering number: 095.022.1Y.50.60.E (TF07), 095.013.1E.05.59.0 (TF05)).
- Depending on diameter of the adapter the flow rate can increase due to leakage between connecting pipe and rotating cleaning nozzle.



High impact tank cleaning machine »IntenseClean Hygienic« Series 5TA



- Gear-controlled
- Particularly powerful solid jets
- Operating pressures up to 15 bar possible

Materials:

Stainless steel 316L SS,
Stainless steel 632 SS,
PEEK, PTFE, Zirconium
oxide, EPDM

Max. temperature:

95 °C

Recommended operating pressure:

5 bar

Installation:

Operation in every direction
possible

Filtration:

Line strainer with a mesh size
of 0.2 mm/80 mesh

Bearing:

Ball bearing

Weight:

0.9 kg

Rotation monitoring sensor:

Sensor compatible,
Info: see page 34




Function video

Scan the QR-code
or go to:
www.lechler.de/IntenseCleanHygienic5TAGB




**ATEX version
on request**

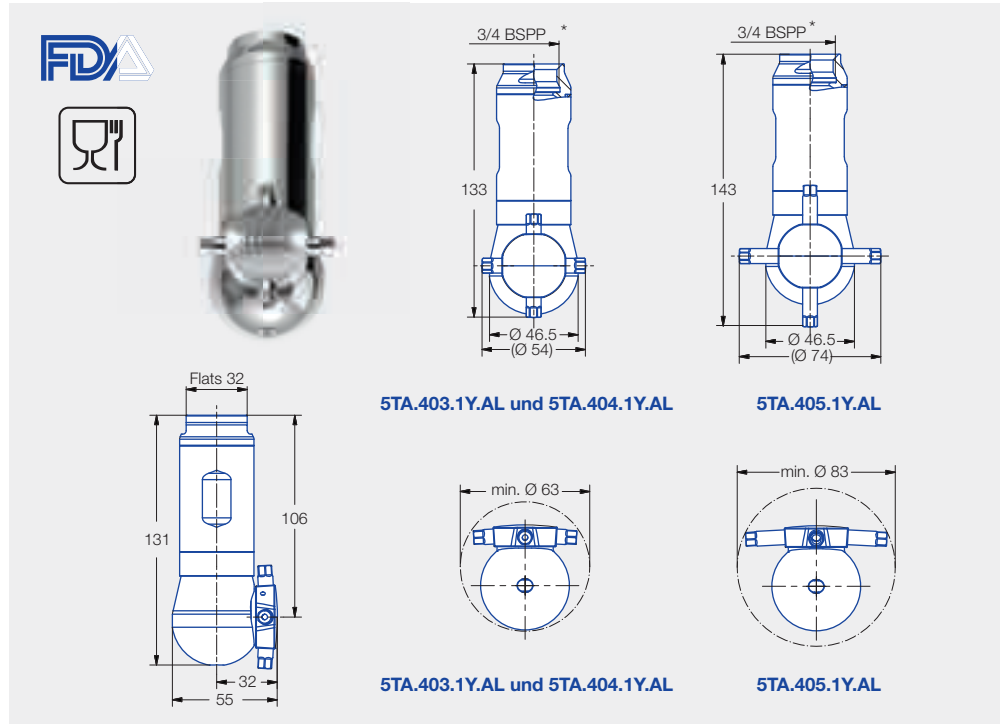

Spray angle 	Ordering no. Type	E Ø [mm]	Number. Ø Nozz- les [mm]	V [l/min]				Max. tank diameter [m]
				p [bar] (p _{max} = 15 bar)				
				2	5	10	at 40 psi [US gal./ min]	
360° 	5TA.403.1Y.AL	1.5	4 x 3.0	25	40	56	7.8	12.0
	5TA.404.1Y.AL	1.5	4 x 4.0	35	55	78	10.9	12.5
	5TA.405.1Y.AL	1.5	4 x 5.0	50	79	112	15.5	13.0

* Slip-on connection on request
E = Narrowest free cross-section


The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

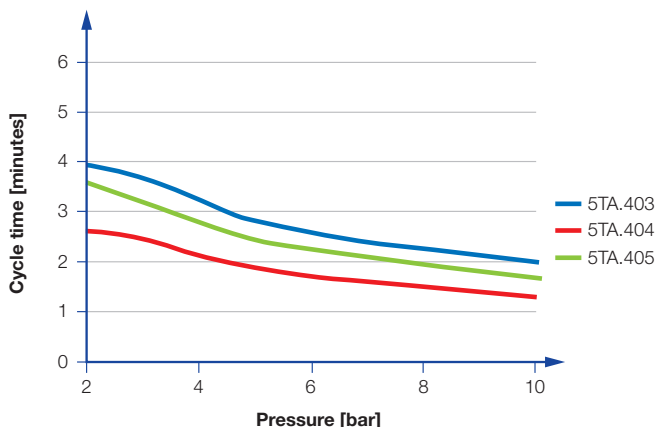

Cycle time depending on pressure of series 5TA



High impact tank cleaning machine »IntenseClean Hygienic« Series 5TB



- Gear-controlled
- Particularly powerful solid jets
- Operating pressures up to 25 bar possible

Materials:

Stainless steel 316L SS,
Stainless steel 632 SS,
PEEK, PTFE, Zirconium
oxide, EPDM

Max. temperature:

95 °C

Recommended operating pressure:

5 bar

Installation:

Operation in every direction
possible

Filtration:

Line strainer with a mesh size
of 0.2 mm/80 mesh

Bearing:

Ball bearing

Weight:

4.0 kg

Rotation monitoring sensor:

Sensor compatible,
Info: see page 34




Function video

Scan the QR-code
or go to:
www.lechler.de/IntenseCleanHygienic5TBGB




**ATEX version
on request**

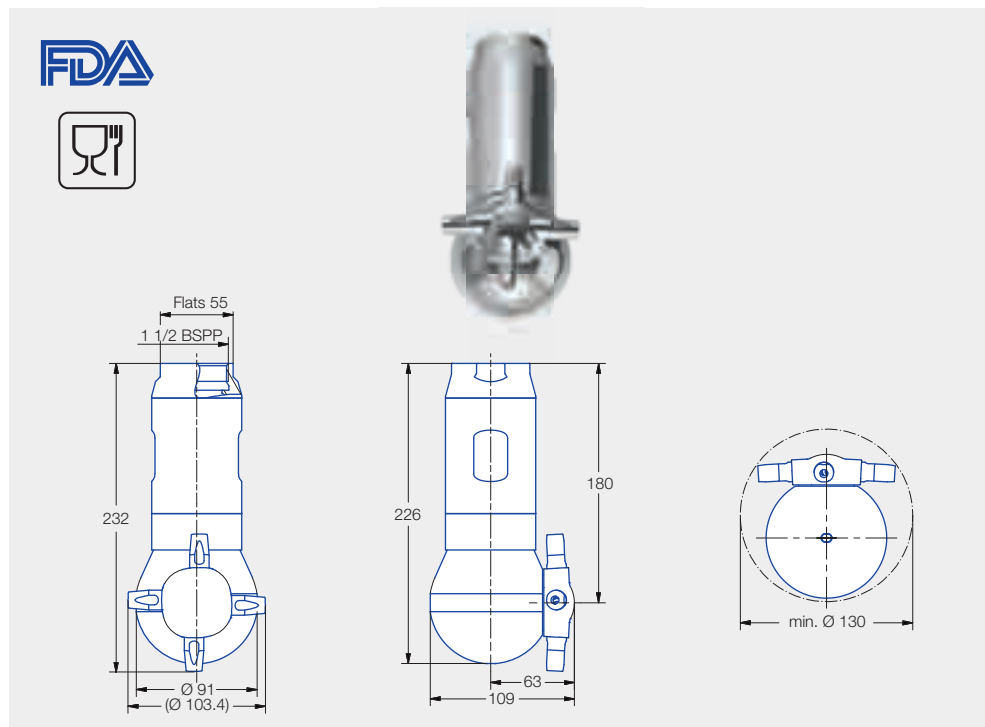

Spray angle 	Ordering no. Type	E Ø [mm]	Number, Ø Nozzles [mm]	V̇ [l/min]				Max. tank diameter [m]
				p [bar] (p _{max} = 25 bar)				
				2	5	10	at 40 psi [US gal./ min]	
360° 	5TB.406.1Y.AS	6.0	4 x 6.0	107	169	239	33.1	14.0
	5TB.407.1Y.AS	6.0	4 x 7.0	135	213	302	41.9	14.0
	5TB.408.1Y.AS	6.0	4 x 8.0	165	261	369	51.2	15.0

E = Narrowest free cross-section

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

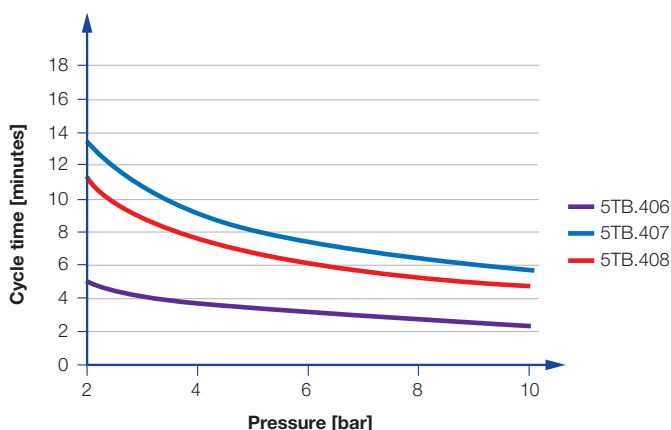

Cycle time depending on pressure of series 5TB



High impact tank cleaning machine

»IntenseClean«

Series 5TM



- Gear driven
- Very powerful solid jets
- Popular and proven design

Materials*:

Stainless steel 316L SS,
PTFE, carbon fibre

Max. temperature:

60 °C
(Version for higher
temperatures on request)

Recommended operating pressure:

5 bar

Installation:

Operation in every direction
possible

Filtration:

Line strainer with a mesh size
of 0.2 mm/80 mesh

Bearing:

Ball bearing

Weight:

7.5 kg

Rotation monitoring


sensor:

Sensor compatible,
Info: see page 34



Function video


Scan the QR-code
or go to:
[www.lechler.de/
IntenseCleanGB](http://www.lechler.de/IntenseCleanGB)

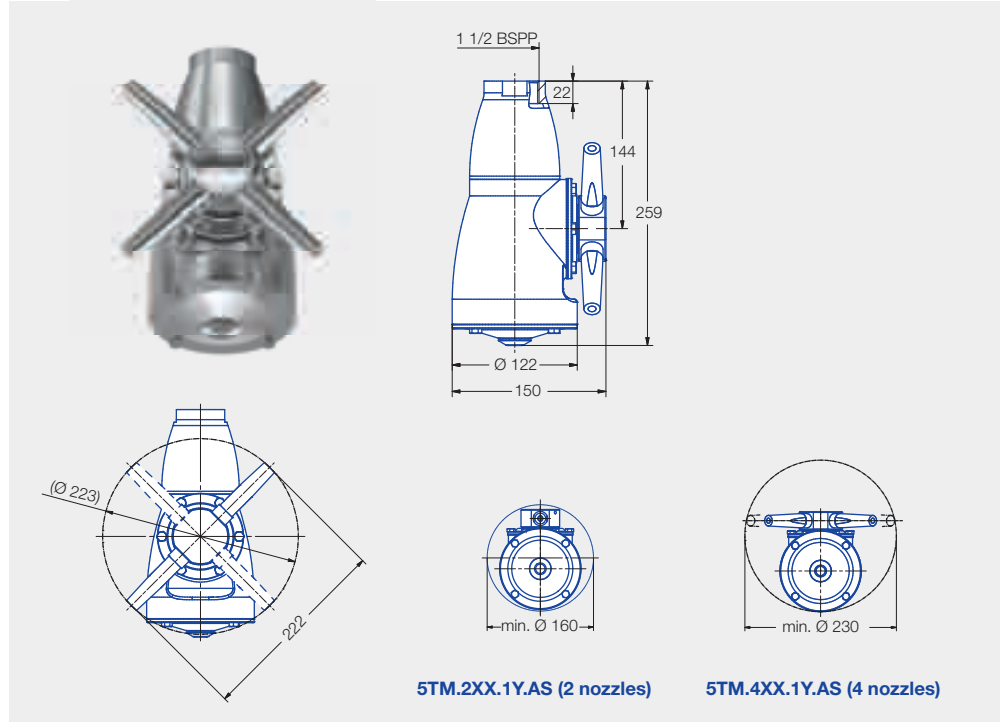

Spray angle 	Ordering no.	E Ø [mm]	Number, Ø Nozzles [mm]	V̇ [l/min]				Max tank diameter [m]
				p [bar] (p _{max} = 7 bar)				
				2	3	5	at 40 psi [US gal./ min]	
360° 	5TM.208.1Y.AS	8	2 x 8.0	125	153	198	39	24.0
	5TM.210.1Y.AS	10	2 x 10.0	160	196	253	50	24.0
	5TM.406.1Y.AS	6	4 x 6.0	140	171	221	43	18.0
	5TM.407.1Y.AS	7	4 x 7.0	170	208	269	53	20.0
	5TM.408.1Y.AS	8	4 x 8.0	200	245	316	62	22.0
	5TM.410.1Y.AS	10	4 x 10.0	260	318	411	81	23.0

E = Narrowest free cross-section

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

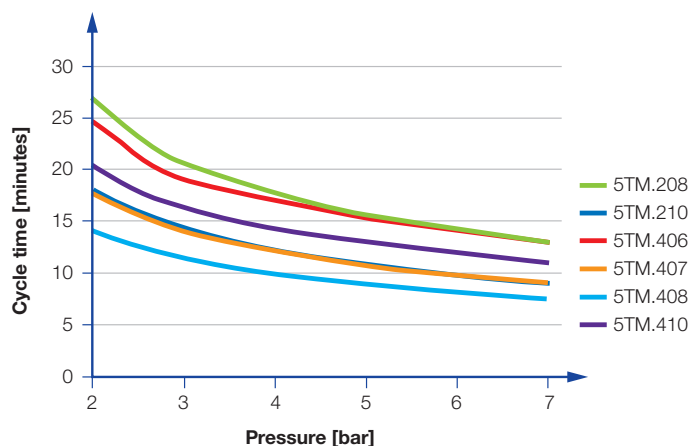


Cycle time depending on pressure of series 5TM

* The mentioned materials refer to the main components of the tank cleaning machine. A detailed list of all contained materials is available on request.



Rotation Monitoring Sensor

Cleaning processes can be easily and reliably monitored with the Lechler rotation monitoring sensor. The sensor records the quantity of liquid flowing over the sensor tip. With the aid of the software*, the sensor function can be specifically adjusted to the tank size, pressure and nozzle.

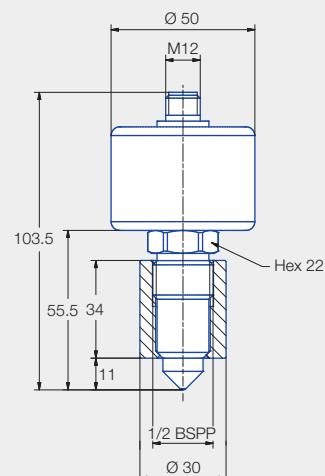

Electrical data

- Supply voltage:
Ub = 24 V +/-20%
(18 to 32 VDC)
- Power requirements:
< 20 mA
- Output signal:
PNP, 50 mA short circuit
protected, active

Operating conditions

- Ambient temperature:
-10° up to +60°C
- Process temperature:
0° up to +100°C

Materials

- Socket (G 1/2"): 316L SS
- Probe tip: PEEK
- Body: 303 SS

Operating principle

- Capacitive

Advantages

- Reliable recognition of any faults during the cleaning cycle
- The process connection of the sensor is in compliance with the hygiene guidelines of the EHEDG
- Simple operation
- Can be connected to PLC
- Only needs to be set up once using the software provided
- Can be specifically adapted to each cleaning task



Ordering data

Rotation monitoring sensor with weld-in sleeve
Cable set for first-time operation

Ordering no.

050.040.00.00.00.0
050.040.00.00.01.0

Rotation monitoring sensor with weld-in sleeve



Cable set for first-time operation/installation



Main adapter with cable



USB adapter with cable



Programming adapter Y-piece



Weld-in mandrel



Static spray balls Series 527



- Effective solid jets
- 3A® certification

Materials*:

Stainless steel 316L SS

Max. temperature:


200 °C

Recommended operating pressure:

1.5 bar

Installation:

Operation in every direction possible



Slip-on connection
ASME - BPE 1997 (OD-Tube)

Spray angle 	Ordering no. Type	E Ø [mm]	V̇ [l/min]					Dimensions approx. [mm]					Max. tank diameter [m]	
			p [bar] (p _{max} = 5 bar)					Height H [mm]	Dia- meter D [mm]	B	C	A		
			1	2	3	5	at 40 psi [US gal./ min]							
	360°	527.209.1Y.00.75	0.8	42	60	73	95	19	68	32	19.0	3.3	12.7	5.2
		527.289.1Y.01.50	1.1	120	170	208	269	50	116	65	38.3	4.9	25.4	6.0
		527.449.1Y.02.00	1.7	297	420	514	664	127	152	102	51.0	4.9	25.4	8.2

E = Narrowest free cross-section

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

Slip-on information: - R-clip made of stainless steel 316L SS is included.

- Depending on diameter of the adapter the flow rate can increase due to leakage between connecting pipe and static spray ball.

In most applications, static spray balls do not deliver the same cleaning power as rotating nozzles, anyway they do have advantages that make them indispensable for certain tasks:


- No moving parts
- Self-draining
- Easy to inspect
- Proven use in hygienically sensitive environments

Should a rotating nozzle stop turning for some reason, parts of the tank may remain uncleaned. This cannot happen with spray balls. However, gaps can occur in the spray pattern if individual openings are blocked with soil.

Compared to rotating nozzles, static spray balls usually need two to three times the amount of liquid.



Static spray balls Series 591



- Popular spray ball design
- Effective solid jets

Materials:

Stainless steel 316Ti SS
Pin: Stainless steel 316L SS

Other materials (316L SS
and PTFE) on request.

Max. temperature:

200 °C

**Recommended
operating pressure:**
3 bar


Installation:

Operation in every direction
possible



Function video

Scan the QR-code
or go to:
[www.lechler.de/
StaticSprayBallGB](http://www.lechler.de/StaticSprayBallGB)

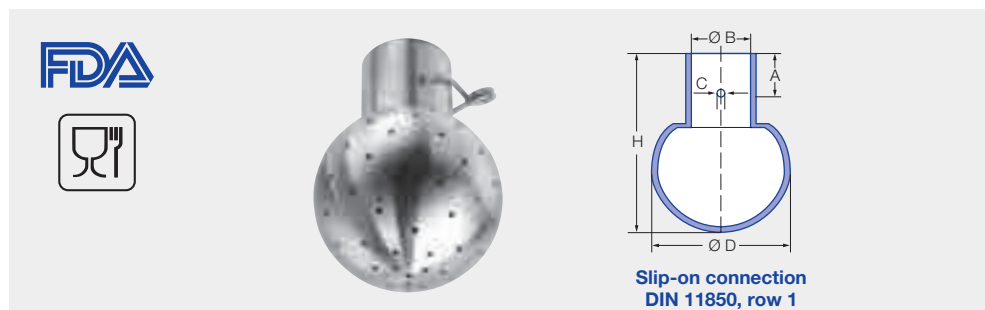

Spray angle	Ordering no. Type	E Ø [mm]	V̇ [l/min]					Dimensions approx. [mm]						Max. tank diameter [m]
			p [bar] (p _{max} = 5 bar)					Ø D	Height H	Con- nection B	Slip- on	C	A	
			0.5	1	2	3	at 40 psi [US gal./ min]							
	591.M11.17.00	0.8	7	10	14	17	4	20	32.5	8.2	DN8	2.2	9.0	2.0
	591.X11.17.00	1.2	25	35	49	61	15	24	37.5	12.2	DN10	2.2	9.0	2.2
	591.Y11.17.00	1.6	49	70	99	121	31	30	42	18.2	DN15	2.2	9.0	2.5
	591.A21.17.00	2.0	91	128	181	222	56	40	53	22.2	DN20	2.5	9.0	3.5
	591.B31.17.00	2.1	130	183	259	318	80	64	90	28.2	DN25	2.8	18.0	5.2
	591.B51.17.00	3.0	206	292	412	505	128	64	90	28.2	DN25	2.8	18.0	5.4
	591.A23.17.00	2.0	74	105	148	182	46	40	53	22.2	DN20	2.5	9.0	2.5
	591.B53.17.00	3.0	146	207	292	358	91	64	90	28.2	DN25	2.8	18.0	4.6
	591.B32.17.00	2.1	103	145	205	251	64	64	90	28.2	DN25	2.8	18.0	5.2
	591.D42.17.00	2.2	230	325	460	563	142	90	122	52.3	DN50	3.3	25.0	5.5

E = Narrowest free cross-section
Female thread and more slip-on sizes on request

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

Slip-on information: - R-clip made of stainless steel 316L SS is included.
- Depending on diameter of the adapter the flow rate can increase due to leakage between connecting pipe and static spray ball.

In most applications, static spray balls do not deliver the same cleaning power as rotating nozzles, anyway they do have advantages that make them indispensable for certain tasks:

- No moving parts
- Self-draining
- Easy to inspect
- Proven use in hygienically sensitive environments

Should a rotating nozzle stop turning for some reason, parts of the tank may remain uncleaned. This cannot happen with spray balls. However, gaps can occur in the spray pattern if individual openings are blocked with soil.

Compared to rotating nozzles, static spray balls usually need two to three times the amount of liquid.



Pneumatic atomizing nozzles, **Full cone,** pressure principle, internal mixing **Series 136.1**




Fine full cone atomization and fogging with air or gas. Liquid pressure principle. Internal mixing of fluids.

Applications:



Humidification of air, cooling, disinfection (e.g. bottles), coating, dosing, release agent applications.




Series 136.1

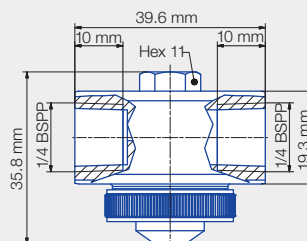

Weight brass: 200 g

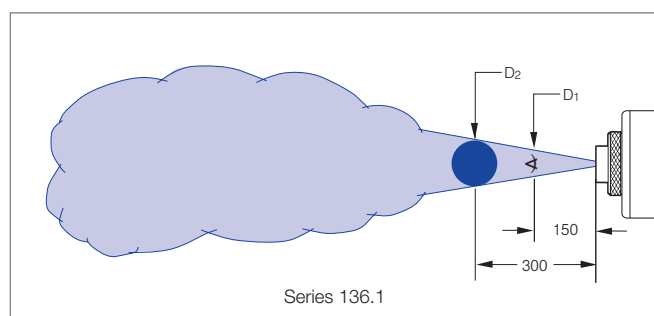

Series 136.1

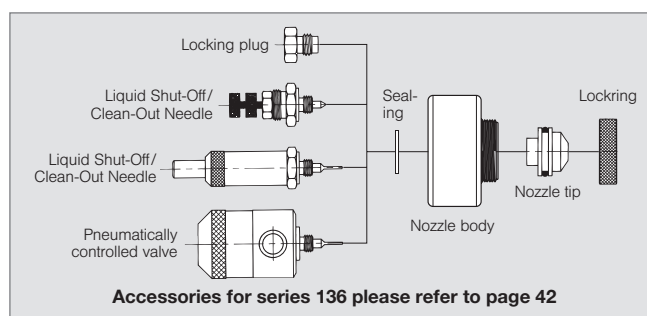

Accessories for series 136 please refer to page 42

Spray angle 	Ordering no.		E Ø [mm]	Liquid pressure p [bar]												Spray dimensions				
	Type	Mat. no.		0.7			1.5			3.0			4.0			p Air [bar]	p Water [bar]	D ₁ [mm]	D ₂ [mm]	
		1Y		35	p Air [bar]	V̇ Water [l/h]	V̇ _i Air [m³/h]	p Air [bar]	V̇ Water [l/h]	V̇ _i Air [m³/h]	p Air [bar]	V̇ Water [l/h]	V̇ _i Air [m³/h]							
		316L SS		Brass plated																
20°	136. 115. xx. A2	○	○	0.50	0.40	5.90	0.30	1.40	5.80	0.80	2.40	9.10	1.10	3.00	11.00	1.20	0.80	0.70	60	100
					0.80	3.80	0.60	1.80	4.10	1.00	2.80	7.50	1.20	3.40	9.60	1.40	1.80	1.50	60	95
					1.20	1.70	0.90	2.20	2.20	1.40	3.20	5.90	1.50	3.80	8.20	1.60	2.60	2.00	60	100
					-	-	-	2.60	1.20	1.70	3.60	4.40	1.80	4.20	6.80	1.90	3.20	3.00	55	95
					-	-	-	-	-	-	4.00	2.90	2.10	4.60	5.50	2.20	4.40	4.00	55	100
					-	-	-	-	-	-	4.40	2.00	2.50	5.00	4.10	2.50				
					-	-	-	-	-	-	4.80	1.10	2.80	5.40	2.90	2.80				
					-	-	-	-	-	-	5.20	0.40	3.00	5.80	2.10	3.10				
	136. 125. xx. A2	○	○	0.50	0.80	4.70	1.50	1.20	7.00	1.80	2.80	9.10	3.30	3.40	10.60	3.90	1.40	0.70	55	90
					1.20	4.40	1.90	1.60	6.60	2.20	3.20	8.70	3.70	3.80	10.30	4.30	2.20	1.50	55	95
					1.60	4.00	2.30	2.00	6.20	2.60	3.60	8.40	4.10	4.20	9.90	4.60	2.80	2.00	55	100
					2.00	3.50	2.60	2.40	5.80	3.00	4.00	8.00	4.50	4.60	9.60	5.00	3.40	3.00	60	100
					2.40	3.00	3.00	2.80	5.40	3.40	4.40	7.70	4.80	5.00	9.30	5.40	4.20	4.00	60	100
					2.80	2.70	3.20	3.20	4.90	3.70	4.80	7.30	5.20	5.40	8.90	5.80				
					3.20	2.00	3.70	3.60	4.40	4.10	5.20	7.00	5.60	5.80	8.60	6.10				
					3.60	1.60	4.10	4.00	3.90	4.50	5.60	6.60	5.90	-	-	-				
					4.00	1.30	4.50	4.40	3.50	4.80	6.00	6.20	6.30	-	-	-				
					4.40	1.00	4.90	4.80	3.10	5.20	-	-	-	-	-	-				
					4.80	0.60	5.20	5.20	2.70	5.60	-	-	-	-	-	-				
					-	-	-	5.60	2.30	5.90	-	-	-	-	-	-				
					-	-	-	6.00	1.90	6.30	-	-	-	-	-	-				

E = narrowest free cross section (water)

Continued on next page.

Example **Type** + **Material no. (xx) = Ordering no.**
for ordering: 136. 115. xx. A2 + 1Y = 136. 115. 1Y. A2




Pneumatic atomizing nozzles, **Full cone,** pressure principle, internal mixing **Series 136.1**



Spray angle 	Ordering no.			E Ø [mm]	Liquid pressure p [bar]												Spray dimensions			
	Type	Mat. no.			0.7			1.5			3.0			4.0			p Air [bar]	p Water [bar]	D ₁ [mm]	D ₂ [mm]
		1Y	35		p Air [bar]	V Water [l/h]	V Air [m³/h]	p Air [bar]	V Water [l/h]	V Air [m³/h]	p Air [bar]	V Water [l/h]	V Air [m³/h]							
		316L SS	Brass plated																	
20°	136. 134. xx. A2	○	○	0.7	1.20	13.20	2.70	2.00	19.40	3.90	3.00	28.30	5.20	3.80	32.60	6.20	1.80	0.70	55	95
					1.60	12.40	3.30	2.40	18.10	4.40	3.40	27.50	5.70	4.20	32.00	6.80	2.80	1.50	60	105
					2.00	11.80	3.90	2.80	17.30	4.90	3.80	26.70	6.30	4.60	31.30	7.30	3.80	2.00	60	105
					2.40	11.40	4.40	3.20	16.70	5.50	4.20	25.90	6.80	5.00	30.60	7.80	5.20	3.00	65	110
					2.80	11.10	4.90	3.60	16.10	6.00	4.60	25.00	7.30	5.40	29.90	8.40	6.00	4.00	65	110
					3.20	10.80	5.50	4.00	15.60	6.50	5.00	24.20	7.80	5.80	29.30	8.90				
					3.60	10.60	6.00	4.40	15.20	7.00	5.40	23.60	8.40	-	-	-				
					4.00	10.40	6.50	4.80	15.00	7.60	5.80	23.10	8.90	-	-	-				
					4.40	10.10	7.00	5.20	14.60	8.10	-	-	-	-	-	-				
					4.80	9.90	7.60	5.60	14.10	8.60	-	-	-	-	-	-				
					5.20	9.50	8.10	6.00	13.80	9.10	-	-	-	-	-	-				
					5.60	9.00	8.60	-	-	-	-	-	-	-	-	-				
					6.00	8.50	9.20	-	-	-	-	-	-	-	-	-				
	136. 142. xx. A2	○	○	2.5	1.40	24.20	5.10	1.60	53.40	4.70	3.20	70.80	8.00	3.80	93.20	9.20	0.80	0.70	60	100
					1.80	20.40	6.30	2.00	42.60	5.90	3.60	62.50	9.20	4.20	83.10	10.10	1.60	1.50	65	105
					2.20	20.00	7.20	2.40	35.30	7.20	4.00	55.70	10.60	4.60	75.30	11.30	3.00	2.00	60	105
					2.60	19.30	8.20	2.80	30.40	8.40	4.40	49.30	11.70	5.00	69.00	12.50	4.00	3.00	65	110
					3.00	17.60	9.30	3.20	28.60	9.50	4.80	44.60	12.90	5.40	63.40	13.70	6.00	4.00	65	110
					3.40	16.50	10.40	3.60	28.20	10.50	5.20	41.90	14.10	5.80	57.50	14.90				
					3.80	17.00	11.40	4.00	27.30	11.50	5.60	40.40	15.10	-	-	-				
					4.20	16.30	12.40	4.40	25.90	12.50	6.00	39.70	16.10	-	-	-				
					4.60	15.10	13.30	4.80	24.30	13.50	-	-	-	-	-	-				
					5.00	14.00	14.30	5.20	22.30	14.60	-	-	-	-	-	-				
					5.40	13.10	15.30	5.60	21.80	15.70	-	-	-	-	-	-				
					5.80	12.40	16.20	6.00	21.40	16.70	-	-	-	-	-	-				

E = narrowest free cross section (water)

Example **Type** + **Material no. (xx) = Ordering no.**
for ordering: 136. 134. xx. A2 + 1Y = 136. 134. 1Y. A2

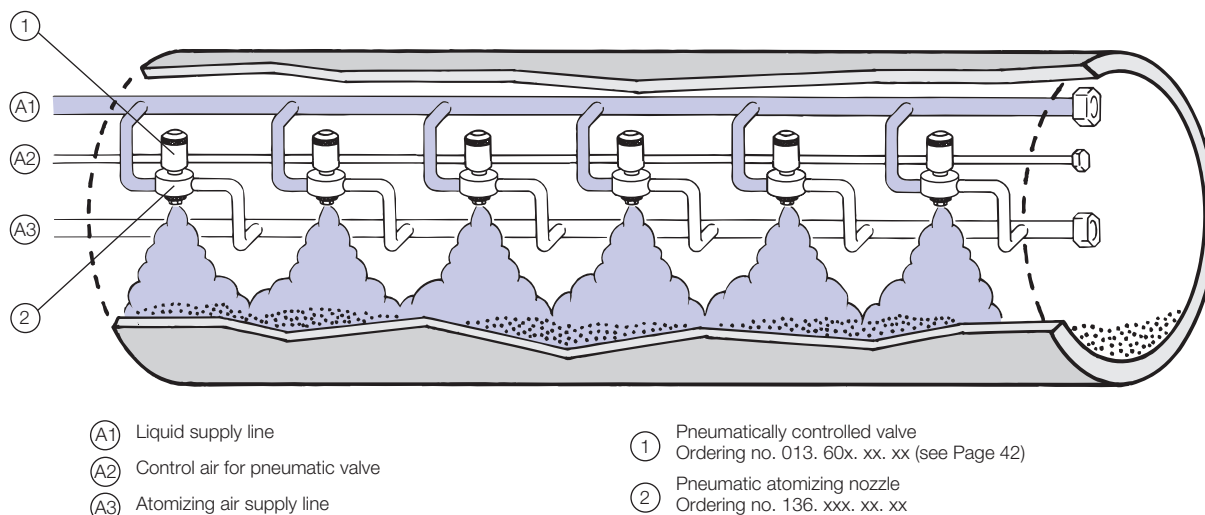

Cereal dampening in a mixing drum




Pneumatic atomizing nozzles, **Full cone,** pressure principle, internal mixing **Series 136.2**



Fine full cone atomization and fogging with air or gas. Especially wide spray angle of 60°.
Pressure principle.
Internal mixing of fluids.


Applications:

Humidification of air, cooling, disinfection (e.g. bottles), coating, dosing, release agent applications.

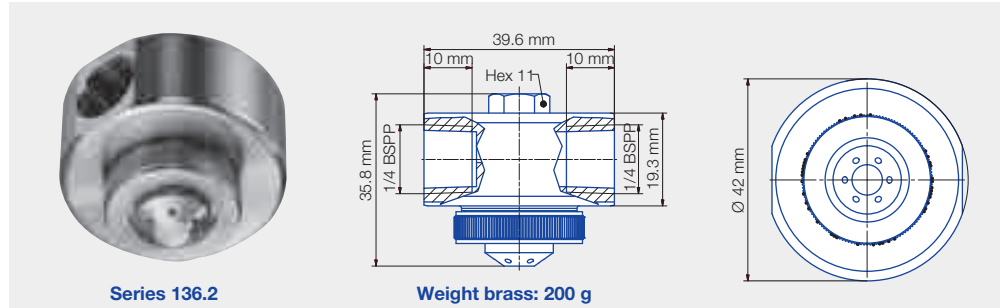


Series 136.2

Weight brass: 200 g

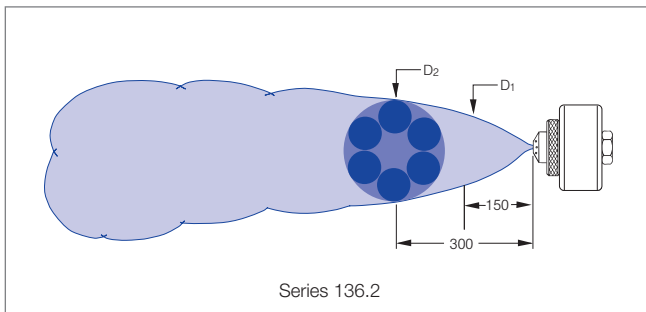

Series 136.2

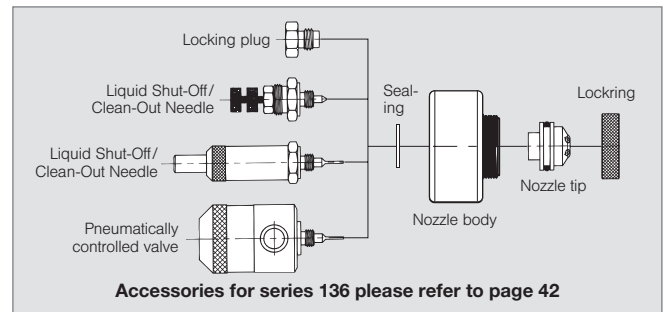

Accessories for series 136 please refer to page 42

Spray angle 	Ordering no.		E Ø [mm]	Liquid pressure p [bar]												Spray dimensions			
	Type	Mat. no.		0.7			1.5			3.0			4.0			p Air [bar]	p Water [bar]	D1 [mm]	D2 [mm]
		1Y 316L SS 35 Brass plated		p Air [bar]	Q Water [l/h]	Q Air [m³/h]	p Air [bar]	Q Water [l/h]	Q Air [m³/h]	p Air [bar]	Q Water [l/h]	Q Air [m³/h]	p Air [bar]	Q Water [l/h]	Q Air [m³/h]				
60°	136. 215. xx. A2	○ ○	0.5	1.00	3.00	1.30	1.60	5.80	1.70	2.80	8.50	2.40	3.80	9.40	3.10	1.00	0.70	200	330
				1.20	1.80	1.50	1.80	4.90	1.90	3.20	7.20	2.80	4.20	8.20	3.50	1.60	1.50	230	380
				1.40	0.70	1.80	2.00	3.80	2.10	3.60	5.70	3.20	4.60	6.90	3.90	2.40	2.00	230	385
				-	-	-	2.20	2.80	2.30	4.00	4.00	3.60	5.00	5.40	4.20	3.20	3.00	245	390
				-	-	-	2.40	1.70	2.50	4.40	2.20	4.10	5.40	3.80	4.70	4.20	4.00	250	410
				-	-	-	2.60	0.80	2.80	4.80	0.80	4.50	5.80	2.30	5.20				
				-	-	-	-	-	-	5.00	0.40	4.60	6.00	1.40	5.60				
				0.80	17.50	2.80	1.60	25.90	4.00	3.00	40.40	5.80	3.80	54.90	6.40	0.80	0.70	250	450
	136. 222. xx. A2	○ ○	1.0	1.00	6.00	4.30	1.80	14.70	5.30	3.20	31.50	6.90	4.00	45.60	7.30	1.60	1.50	245	465
				-	-	-	2.00	6.70	6.70	3.40	22.20	8.20	4.20	37.60	8.50	2.30	2.00	245	465
				-	-	-	2.20	1.90	8.10	3.60	14.60	9.50	4.40	29.60	9.70	3.20	3.00	250	465
				-	-	-	-	-	-	3.80	8.50	11.00	4.60	21.60	11.20	4.20	4.00	245	465
				-	-	-	-	-	-	4.00	4.50	12.30	4.80	15.30	12.40				
				-	-	-	-	-	-	-	-	-	5.00	9.70	13.80				
				-	-	-	-	-	-	-	-	-	5.20	6.00	15.20				
				-	-	-	-	-	-	-	-	-	5.40	2.90	16.50				
	136. 231. xx. A2	○ ○	1.4	1.60	25.60	5.10	2.60	44.20	7.00	3.60	93.70	7.90	4.20	132.90	7.30	2.00	0.70	235	380
				2.00	17.80	6.20	3.00	33.00	8.20	4.00	78.30	9.30	4.60	117.20	9.00	2.60	1.50	245	415
				2.40	11.30	7.20	3.40	24.70	9.20	4.40	65.80	10.60	5.00	101.10	10.40	2.40	2.00	255	420
				2.80	6.90	8.10	3.80	18.10	10.20	4.80	54.90	11.90	5.40	87.90	11.80	3.60	3.00	255	425
				-	-	-	4.20	13.20	11.20	5.20	45.60	13.00	5.80	76.60	13.20	4.20	4.00	265	430
				-	-	-	4.60	9.30	12.00	5.60	38.00	14.10	6.00	71.20	13.80				
				-	-	-	-	-	-	6.00	36.10	14.40	-	-	-				
				-	-	-	-	-	-	-	-	-	-	-	-				

E = narrowest free cross section (water)

Example **Type** + **Material no. (xx)** = **Ordering no.**
for ordering: 136. 215. xx. A2 + 1Y = 136. 215. 1Y. A2




Pneumatic atomizing nozzles, **Flat fan,** pressure principle, internal mixing **Series 136.4**



Particularly fine flat fan atomization with air or gas. Pressure principle. Internal mixing of fluids.


Applications:

Belt lubrication, cooling, humidification of goods, coating, dosing (e.g. Conveyor belt), release agent applications.

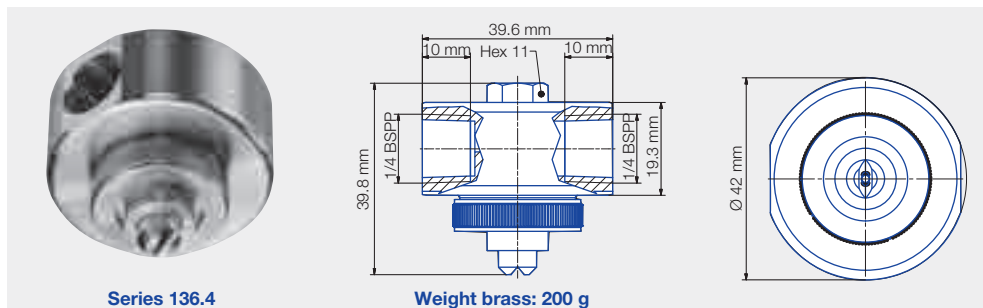


Series 136.4

Weight brass: 200 g

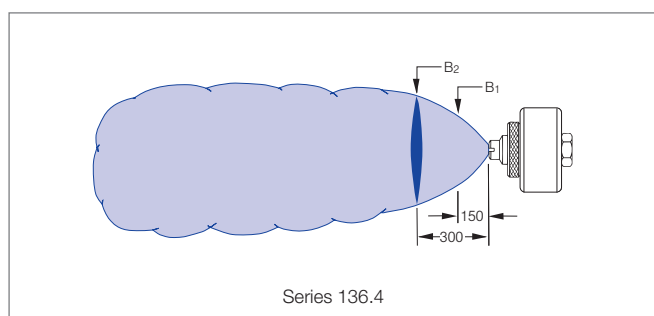

Series 136.4

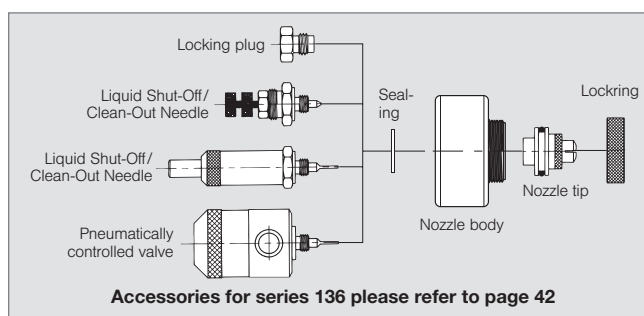

Accessories for series 136 please refer to page 42

Spray angle 	Ordering no.			E Ø [mm]	Liquid pressure p [bar]												Spray dimensions			
	Type	Mat. no.			0.7			1.5			3.0			4.0			p [bar]	p Water [bar]	B ₁ [mm]	B ₂ [mm]
		1Y	35		p [bar]	ṽ Water [l/h]	ṽ Air [m³/h]	p [bar]	ṽ Water [l/h]	ṽ Air [m³/h]	p [bar]	ṽ Water [l/h]	ṽ Air [m³/h]	p [bar]	ṽ Water [l/h]	ṽ Air [m³/h]				
45°	136. 414. xx. A2	○	○	0.7	1.00	7.70	1.30	1.40	14.30	1.50	2.20	22.40	2.00	3.00	25.10	2.50	1.40	0.70	85	125
					1.20	6.00	1.50	1.60	13.00	1.60	2.60	20.00	2.30	3.40	23.00	2.80	2.40	1.50	100	145
					1.40	4.20	1.70	1.80	11.60	1.80	3.00	17.70	2.60	3.80	20.90	3.10	3.20	2.00	105	155
					1.60	2.70	1.90	2.00	10.20	2.00	3.40	15.50	3.00	4.20	18.90	3.50	3.80	3.00	120	170
					1.80	1.30	2.10	2.20	8.90	2.20	3.80	13.30	3.40	4.60	16.90	3.80	4.60	4.00	130	210
					-	-	-	2.40	7.40	2.40	4.20	11.00	3.70	5.00	14.90	4.20				
					-	-	-	2.60	5.90	2.60	4.60	8.80	4.10	5.40	12.80	4.60				
					-	-	-	2.80	4.60	2.80	5.00	6.60	4.50	5.80	10.80	5.00				
					-	-	-	3.00	3.20	3.00	5.40	4.30	4.90	6.00	9.80	5.20				
					-	-	-	3.20	2.10	3.20	5.80	2.50	5.30	-	-	-				
					-	-	-	3.40	1.10	3.40	6.00	1.60	5.50	-	-	-				
	136. 443. xx. A2	○	○	1.0	1.20	13.90	1.50	1.60	26.60	1.60	3.00	37.10	2.60	3.60	45.60	2.90	1.20	0.70	110	165
					1.40	11.90	1.70	1.80	24.30	1.80	3.40	33.10	3.00	4.00	41.90	3.30	2.00	1.50	115	190
					1.60	9.50	1.90	2.00	22.00	2.00	3.80	29.50	3.40	4.40	38.30	3.70	2.80	2.00	145	190
					1.80	7.80	2.10	2.20	19.90	2.20	4.20	26.20	3.80	4.80	35.00	4.00	3.80	3.00	150	210
					-	-	-	2.40	18.00	2.40	4.60	23.00	4.20	5.20	31.80	4.50	4.80	4.00	160	230
					-	-	-	2.60	16.20	2.60	5.00	20.20	4.60	5.60	29.00	4.90				
					-	-	-	2.80	14.40	2.80	5.40	17.60	4.90	6.00	26.20	5.20				
					-	-	-	3.00	12.80	3.00	5.80	14.90	5.30	-	-	-				
					-	-	-	3.20	11.30	3.20	6.00	14.10	5.50	-	-	-				
					-	-	-	3.40	9.90	3.40	-	-	-	-	-	-				
					-	-	-	3.60	8.80	3.60	-	-	-	-	-	-				

E = narrowest free cross section (water)

Continued on next page.

Example **Type** + **Material no. (xx)** = **Ordering no.**
for ordering: 136. 414. xx. A2 + 1Y = 136. 414. 1Y. A2



Pneumatic atomizing nozzles, **Flat fan,** **pressure principle, internal mixing** **Series 136.4**



Spray angle 	Ordering no.			E Ø [mm]	Liquid pressure p [bar]												Spray dimensions								
	Type	Mat. no.			0.7			1.5			3.0			4.0			p Air [bar]	p Water [bar]	B ₁ [mm]	B ₂ [mm]					
		1Y	35		p Air [bar]	V Water [l/h]	V̇ Air [m³/h]	p Air [bar]	V Water [l/h]	V̇ Air [m³/h]	p Air [bar]	V Water [l/h]	V̇ Air [m³/h]	p Air [bar]	V Water [l/h]	V̇ Air [m³/h]									
		316L SS	Brass plated																						
45°	136. 462. xx. A2	○	○	1.5	1.20	19.00	2.60	2.00	22.00	2.00	3.00	61.80	4.00	3.80	76.10	4.60	1.20	0.70	120	140					
					1.60	12.20	3.40	2.40	18.00	2.40	3.40	51.90	4.80	4.00	70.40	5.10	2.40	1.50	120	170					
					2.00	9.40	4.10	2.80	14.40	2.80	3.80	44.60	5.80	4.20	65.60	5.50	3.20	2.00	120	175					
					2.40	7.10	4.80	3.20	11.30	3.20	4.20	39.00	6.60	4.40	61.30	5.90	3.80	3.00	140	205					
					2.80	5.70	5.40	3.60	8.80	3.60	4.60	33.40	7.40	4.60	57.30	6.40	6.00	4.00	145	205					
					3.20	5.00	6.00	4.00	8.10	3.90	5.00	29.40	8.10	4.80	54.10	6.70									
					3.60	3.60	6.60	4.40	6.20	4.30	5.40	25.50	8.90	5.00	51.30	7.20									
					4.00	3.20	7.20	4.80	4.60	4.60	5.80	22.00	9.60	5.20	49.30	7.70									
					4.40	2.20	7.80	5.20	3.20	4.90	6.00	20.60	9.90	5.40	46.50	8.20									
					-	-	-	5.60	1.60	5.30	-	-	-	5.60	43.70	8.60									
					-	-	-	5.80	0.80	5.40	-	-	-	5.80	41.30	8.90									
					-	-	-	-	-	-	-	-	-	6.00	39.00	9.30									
					60°	136. 425. xx. A2	○	○	0.5	0.80	6.50	1.20	1.40	9.40	1.70	2.40	13.20	2.50	2.40	16.10	2.50	1.20	0.70	155	195
										1.20	5.50	1.60	1.80	8.70	2.10	2.60	12.90	2.70	2.80	15.50	2.90	2.20	1.50	165	255
1.60	4.70	1.90	2.20	7.90						2.40	3.00	12.30	3.00	3.20	15.00	3.20	3.00	2.00	170	265					
2.00	4.00	2.30	2.60	7.20						2.70	3.40	11.80	3.40	3.60	14.50	3.50	3.40	3.00	200	330					
2.40	3.20	2.60	3.00	6.40						3.10	3.80	11.10	3.70	4.00	13.90	3.80	5.60	4.00	200	330					
2.80	2.60	2.90	3.40	5.70						3.40	4.20	10.40	4.00	4.40	13.40	4.10									
3.00	2.20	3.10	3.80	5.10						3.70	4.60	9.80	4.30	4.80	12.80	4.50									
-	-	-	4.00	4.80						3.90	5.00	9.20	4.60	5.20	12.20	4.80									
-	-	-	4.40	4.20						4.20	5.40	8.60	5.00	5.60	11.70	5.10									
-	-	-	4.80	3.60						4.50	5.80	8.10	5.30	6.00	11.20	5.40									
-	-	-	5.20	2.80						4.80	6.00	7.80	5.40	-	-	-									
-	-	-	5.60	2.20						5.10	-	-	-	-	-	-									
-	-	-	6.00	1.60						5.50	-	-	-	-	-	-									
136. 452. xx. A2	○	○	1.5	1.00		18.80	3.90	1.80	31.00	5.30	3.20	50.10	7.70	3.80	70.70	8.20	1.00	0.70	130	185					
				1.40		8.60	5.70	2.00	25.40	6.30	3.60	39.50	9.40	4.20	58.60	9.60	1.80	1.50	150	240					
				1.80		7.40	7.00	2.20	20.10	7.20	4.00	31.30	11.20	4.60	48.60	11.20	2.60	2.00	155	245					
				2.20		4.10	8.40	2.40	15.50	8.00	4.40	24.00	12.90	5.00	41.20	13.10	3.60	3.00	175	280					
				2.60		1.00	9.80	2.60	12.40	8.90	4.80	17.70	14.50	5.40	33.60	14.80	5.00	4.00	180	285					
				2.80		0.10	10.30	2.80	10.40	9.60	5.20	13.40	16.00	5.80	27.50	16.40									
				-		-	-	-	-	-	5.60	10.60	17.50	6.00	24.40	17.20									
				-		-	-	-	-	-	6.00	8.60	18.80	-	-	-									
80°	136. 433. xx. A2	○	○	0.4	1.00	11.60	2.00	1.80	18.30	2.80	3.00	31.00	3.70	3.80	37.50	4.40	1.40	0.70	150	210					
					1.20	8.10	2.40	2.00	15.30	3.20	3.40	25.40	4.40	4.20	32.40	5.00	2.20	1.50	185	255					
					1.40	5.30	2.80	2.20	12.20	3.60	3.80	20.60	5.10	4.60	27.70	5.70	3.00	2.00	205	300					
					1.60	3.70	3.20	2.40	9.80	4.00	4.20	16.30	5.90	5.00	23.40	6.50	3.80	4.00	300	485					
					-	-	-	2.60	7.60	4.30	4.60	12.50	6.60	5.40	19.40	7.20	5.20	4.00	260	395					
					-	-	-	2.80	5.90	4.70	5.00	9.30	7.30	5.80	15.90	7.90									
					-	-	-	3.00	4.40	5.00	5.40	6.50	8.00	6.00	14.20	8.30									

E = narrowest free cross section (water)



Example **Type** + **Material no. (xx) = Ordering no.**
for ordering: 136. 462. xx. A2 + 1Y = 136. 462. 1Y. A2



Accessories for pneumatic atomizing nozzles

Series 136


Regulating device and shutting-off needle:



Ordering no.		For all nozzles of the series 136
Type	Mat. no.	
	16	
	303 SS	
015. 600	○	


Pneumatically controlled valve

Opening pressure 2.1 bar, max. 180 cycles/min.




Ordering no.			For nozzles	Needle diameter D [mm]
Type	Mat. no.			
	16	35		
	303 SS	Brass plated		
013. 601. xx. 10	○	○	136. xx1	2.1
013. 602. xx. 10	○	○	136. xx2	1.2
013. 604. xx. 10	○	○	136. xx4	0.6

Quick-cleaning device



Ordering no.			For nozzles	Needle diameter D [mm]
Type	Mat. no.			
	16	35		
	303 SS	Brass plated		
013. 601. xx. 20	○	○	136. xx1	2.1
013. 602. xx. 20	○	○	136. xx2	1.2
013. 604. xx. 20	○	○	136. xx4	0.6

Regulating device with quick-cleaning needle



Ordering no.			For nozzles	Needle diameter D [mm]
Type	Mat. no.			
	16	35		
	303 SS	Brass plated		
013. 601. xx. 20	○	○	136. xx1	2.1
013. 602. xx. 20	○	○	136. xx2	1.2
013. 604. xx. 20	○	○	136. xx4	0.6

Example Type + Material no. (xx) = Ordering no.
for ordering: 013. 601. xx. 10 + 16 = 013. 601. 16. 10



Pneumatic atomizing nozzles, for atomizing viscous media Series 176 ViscoMist™




The ViscoMist™ series offers independent regulation of both atomizing air and fan air, which provides the user with infinite control over the viscous fluid's spray pattern and droplet size.

The ViscoMist™ nozzle features a standard 'Liquid Shut-Off/ Clean-Out Needle' function. This design element activates and deactivates the liquid supply, while simultaneously removing excess fluid from the fluid nozzle preventing clogging. This feature is especially vital when the viscous liquids are being applied in continuous process environments.

The modular design of the ViscoMist™ allows maximum flexibility to meet the exact spray requirements.

Interchangeable air caps and various flow capacities are available to suit any spraying application needs.



One nozzle – three spray characters

- - Solid stream
- Full cone
- Flat fan
- Independent regulation of liquid, atomizing air and fan air
- Fluid circulation possible (Nozzle body with 5 connections)

Outside mixing to spray viscous liquids, for example:

- Coating
- Moisturising
- Lubrication
- Glazing
- Sanitising

Fluid cap options Ø 0.38 mm to 2.54 mm

Valve position
Normally closed, fail-safe with loss of air

Signal air pressure
Min. 2 bar
Max. 3 bar

Cycles per minute (short term)
180 cycles / min

Material
1Y (316L SS)

Ports
01 (1/8" NPT (F))
11 (1/8 BSPP (F))

Flow rate range

- Water: 7.8 to 307 l/h, at 2 bar
- Air: 7.5 to 28.4 m³/h i.N., at 2 bar




Atomizing air / Fan air / Signal air


The atomizing air causes the liquid to atomize at the nozzle orifice. The spray character can be adjusted with the fan air to suit the application. The signal air activates the nozzle.

Nozzle body configurations


Nozzle body configuration 2



Nozzle body configuration 4



Nozzle body configuration 5






Axial-flow hollow cone nozzles Series 220



Extremely fine, fog-like hollow cone spray.

Applications:

Disinfection, humidification, cooling.



Spray angle 	Ordering no.				B Ø [mm]	E Ø [mm]	Mesh size [mm]	Ṽ [l/min]								Spray diameter D at p = 5 bar  H = 100 mm
	Type	Mat. no.		Code				p [bar]								
		11 430F SS*	1Y 316L SS*					2.0	3.0	5.0	7.0	10.0	20.0	50.0	100.0	
60°	220. 004	○	○	AC	0.10	0.10	0.04	-	-	0.013	0.015	0.018	0.026	0.041	0.058	100
	220. 014	○	○	AC	0.15	0.15	0.04	-	0.015	0.019	0.022	0.027	0.038	0.060	0.085	100
	220. 054	○	○	AC	0.20	0.15	0.04	0.017	0.021	0.027	0.032	0.038	0.054	0.085	0.121	100
80°	220. 085	○	○	AC	0.25	0.25	0.10	0.025	0.031	0.040	0.047	0.057	0.080	0.126	0.179	140
	220. 125	○	○	AC	0.35	0.35	0.10	0.039	0.048	0.062	0.073	0.088	0.124	0.196	0.277	140
	220. 145	○	○	AC	0.40	0.40	0.10	0.052	0.064	0.082	0.097	0.116	0.164	0.259	0.367	140
	220. 165	○	○	AC	0.45	0.45	0.10	0.065	0.080	0.103	0.122	0.146	0.206	0.326	0.461	140
	220. 185	○	○	AC	0.55	0.35	0.20	0.082	0.101	0.130	0.154	0.184	0.260	0.411	0.581	140
	220. 205	○	○	AC	0.60	0.35	0.20	0.106	0.130	0.168	0.199	0.238	0.336	0.531	0.751	140
	220. 245	○	○	AC	0.70	0.50	0.20	0.165	0.202	0.261	0.309	0.369	0.522	0.825	1.167	140
	220. 285	○	○	AC	0.90	0.55	0.20	0.247	0.302	0.390	0.461	0.552	0.780	1.233	1.744	140

B = bore diameter · E = narrowest free cross section

The integrated strainer avoids clogging of the nozzle and increases its service life.

Example Type + Material-no. + Code = Ordering no.
for ordering: 220.004 + 1Y + AC = 220.004.1Y.AC

*Materials

Mat. no.	Housing	Nozzle insert	Strainer
11	430F SS	430F SS	316L SS
1Y	316L SS	316L SS	316L SS




Axial-flow hollow cone nozzles for retaining nut Series 226



Hollow cone nozzle for assembly with retaining nut. Extremely fine, fog-like hollow cone spray.

Applications:

Disinfection, humidification, cooling.



Spray angle 	Ordering no.		B Ø [mm]	E Ø [mm]	Mesh size [mm]	Ṽ [l/min]								Spray diameter D at p = 5 bar  H = 100 mm
	Type	Mat. no.				p [bar]								
		16 303 SS*				2.0	3.0	5.0	7.0	10.0	20.0	50.0	100.0	
60°	226. 004	○	0.10	0.10	0.04	-	-	0.013	0.015	0.018	0.026	0.041	0.058	100
	226. 014	○	0.15	0.15	0.04	-	0.015	0.019	0.022	0.027	0.038	0.060	0.085	100
	226. 054	○	0.20	0.15	0.04	0.017	0.021	0.027	0.032	0.038	0.054	0.085	0.121	100
80°	226. 085	○	0.25	0.25	0.10	0.025	0.031	0.040	0.047	0.057	0.080	0.126	0.179	140
	226. 125	○	0.35	0.35	0.10	0.039	0.048	0.062	0.073	0.088	0.124	0.196	0.277	140
	226. 145	○	0.40	0.40	0.10	0.052	0.064	0.082	0.097	0.116	0.164	0.259	0.367	140
	226. 165	○	0.45	0.45	0.10	0.065	0.080	0.103	0.122	0.146	0.206	0.326	0.461	140
	226. 185	○	0.55	0.35	0.20	0.082	0.101	0.130	0.154	0.184	0.260	0.411	0.581	140
	226. 205	○	0.60	0.35	0.20	0.106	0.130	0.168	0.199	0.238	0.336	0.531	0.751	140
	226. 245	○	0.70	0.50	0.20	0.165	0.202	0.261	0.309	0.369	0.522	0.825	1.167	140
	226. 285	○	0.90	0.55	0.20	0.247	0.302	0.390	0.461	0.552	0.780	1.233	1.744	140

B = bore diameter · E = narrowest free cross section

The integrated strainer avoids clogging of the nozzle and increases its service life.

Example for ordering:	Type	+	Material-no.	=	Ordering no.
	226.004	+	16	=	226.004.16

*Materials

Mat. no.	Housing	Nozzle insert	Strainer
16	303 SS	430F SS	316L SS

Conversion formula for the above series: $\dot{V}_2 = \dot{V}_1 \cdot \sqrt{\frac{p_2}{p_1}}$



Axial-flow hollow cone nozzles

Series 214 / 216




Fine, uniform hollow cone spray.

Applications:


Cooling and cleaning of air and gas, dust control, spraying onto filters, spray drying, desuperheating.



(Mat. no. 17)



Series 214
Weight brass: 27 g



Series 216
Weight brass: 60 g

Spray angle 	Ordering no.		G	B Ø [mm]	E Ø [mm]	V̇ [l/min]								Spray diameter D at p = 3 bar  H = 250 mm	
	Type	Mat. no.				p [bar]									
		17 316Ti SS													30 Brass
							0.5	1.0	2.0	3.0	5.0	10.0	20.0		
60°	214. 184			1/8"	0.50	0.50	-	-	0.08	0.10	0.13	0.18	0.25	200	
80°	214. 245			1/8"	1.00	0.50	-	-	0.16	0.20	0.25	0.36	0.51	450	
	214. 305			1/8"	1.80	0.50	-	0.23	0.32	0.39	0.51	0.72	1.01	450	
60°	216. 324			3/8"	1.00	1.00	-	0.28	0.40	0.49	0.63	0.89	1.26	200	
	216. 364			3/8"	1.40	1.40	-	0.45	0.63	0.77	1.00	1.41	1.99	200	
	216. 404			3/8"	2.00	2.00	-	0.71	1.00	1.22	1.58	2.24	3.16	200	
90°	216. 496			3/8"	3.00	2.00	-	1.20	1.70	2.08	2.69	3.80	5.38	500	
	216. 566			3/8"	4.00	2.00	-	1.77	2.50	3.06	3.95	5.59	7.91	500	
	216. 646			3/8"	3.50	2.00	2.00	2.83	4.00	4.90	6.32	8.94	12.65	500	
	216. 686			3/8"	4.00	2.00	2.50	3.54	5.00	6.12	7.91	11.18	15.81	500	
	216. 726			3/8"	5.00	2.00	3.15	4.45	6.30	7.72	9.96	14.09	19.92	500	
	216. 776			3/8"	6.00	2.00	4.30	6.00	8.50	10.40	13.40	19.00	26.90	500	

B = bore diameter · E = narrowest free cross section

Example	Type	+	Material no.	=	Ordering no.
for ordering	214. 184	+	17	=	214. 184. 17



Tangential-flow hollow cone nozzles

Plastic version

Series 302




Uniform hollow cone spray. Non-clogging nozzle, without swirl insert.

Applications:


Dust control, spraying onto filters, foam control, pasteurization.



(Mat. no.
5E / 53)



Type 302.32X-302.48X
Weight: 13 g



Type 302.52X-302.99X
Weight: 18 g

Spray angle 	Ordering no.				B Ø [mm]	E Ø [mm]	V̇ [l/min]						Spray diameter D at p = 2 bar 	
	Type	Mat. no.					p [bar]							
		5E	51	53										
		PVDF	PA	PP			0.5	1.0	2.0	3.0	5.0	10.0	H = 250 mm	H = 500 mm
60°	302. 364	-	○	○	1.50	1.50	0.31	0.45	0.63	0.77	1.00	1.41	200	350
	302. 464	-	○	○	3.80	1.95	0.70	0.99	1.40	1.71	2.21	3.13	300	560
90°	302. 326	○	○	-	1.20	0.90	0.20	0.28	0.40	0.49	0.63	0.89	400	700
	302. 366	○	○	-	2.10	1.30	0.31	0.45	0.63	0.77	1.00	1.41	400	880
	302. 406	○	○	○	2.60	1.40	0.50	0.71	1.00	1.22	1.58	2.24	400	880
	302. 486	-	○	○	2.60	2.60	0.80	1.13	1.60	1.96	2.53	3.58	400	880
	302. 526	-	○	○	5.00	2.00	1.00	1.41	2.00	2.45	3.16	4.47	400	880
	302. 566	-	○	○	5.00	2.40	1.25	1.77	2.50	3.06	3.95	5.59	400	880
	302. 606	-	○	○	5.00	3.20	1.57	2.23	3.15	3.86	4.98	7.04	450	950
	302. 686	-	○	-	7.50	3.40	2.50	3.45	5.00	6.12	7.91	11.18	500	1050
	302. 766	-	○	-	9.00	4.30	4.00	5.66	8.00	9.80	12.65	17.89	500	1050
	302. 846	-	○	○	11.00	5.20	6.25	8.84	12.50	15.31	19.67	27.95	550	1130
	302. 886	○	○	○	11.00	6.40	8.00	11.31	16.00	19.60	25.30	35.78	550	1130
	302. 966	-	○	-	11.00	8.60	12.50	17.68	25.00	30.62	39.53	55.90	550	1130
130°	302. 328	○	-	-	1.35	0.80	0.20	0.28	0.40	0.49	0.63	0.89	700	1380
	302. 368	○	○	-	1.85	1.10	0.31	0.45	0.63	0.77	1.00	1.41	700	1380
	302. 408	○	○	-	3.65	1.30	0.50	0.71	1.00	1.22	1.58	2.24	700	1380
	302. 488	-	○	○	5.20	1.60	0.80	1.13	1.60	1.96	2.53	3.58	700	1380
	302. 528	-	○	-	5.00	2.00	1.00	1.41	2.00	2.45	3.16	4.47	700	1380
	302. 568	-	○	-	5.00	2.40	1.25	1.77	2.50	3.06	3.95	5.59	780	1520
	302. 608	○	○	○	5.00	3.20	1.57	2.23	3.15	3.86	4.98	7.04	780	1520
	302. 648	-	○	-	7.50	3.00	2.00	2.83	4.00	4.90	6.32	8.94	950	1850
	302. 688	-	○	-	7.50	3.40	2.50	3.54	5.00	6.12	7.91	11.18	950	1850
	302. 728	-	○	-	7.50	4.10	3.15	4.45	6.30	7.72	9.96	14.09	950	1850
	302. 768	-	○	-	9.00	4.30	4.00	5.66	8.00	9.80	12.65	17.89	950	1850
	302. 848	-	○	-	11.00	5.20	6.25	8.84	12.50	15.31	19.76	27.95	950	1850
	302. 888	-	○	○	11.00	6.40	8.00	11.31	16.00	19.60	25.30	35.78	950	1850
	302. 968	○	○	-	11.00	8.60	12.50	17.68	25.00	30.62	39.53	55.90	950	1850

B = bore diameter · E = narrowest free cross section

Example	Type	+	Material no.	=	Ordering no.
for ordering	302. 364	+	51	=	302. 364. 51

Conversion formula for the above series: $\dot{V}_2 = \dot{V}_1 \cdot \sqrt{\frac{p_2}{p_1}}$



Axial-flow full cone nozzles Series 490 / 491

NEW Patent
pending



Non-clogging nozzle design. Stable spray angle. Particularly even liquid distribution.

Applications:

Cleaning and washing processes, surface spraying, Container cleaning, foam precipitation, degassing of liquids.



(Mat. no. 17)




Series 490




Series 491

Series 490/491 represents a new generation within the axial-flow full cone nozzles product group. These nozzles were developed using state-of-the-art design and simulation methods (CFD).

Nozzles of series 490/491 replace series 460/461 which are still available on request.



Code
CA-CG



Code
AK-AM

Code	Dimensions [mm]					Weight
	G	L ₁	L ₂	D	Hex/Flats	
CA	1/8 BSPT	18.0	6.5	10.0	11	13 g
CC	1/4 BSPT	22.0	10.0	13.0	14	16 g
CE	3/8 BSPT	24.5	10.0	16.0	17	30 g
CE	3/8 BSPT	30.0	10.0	16.0	17	50 g
CG	1/2 BSPT	32.5	13.0	21.0	22	60 g
CG	1/2 BSPT	43.5	13.0	21.0	22	85 g
AK	3/4 BSPP	42.0	15.0	32.0	27	190 g
AM	1 BSPP	56.0	17.0	40.0	36	350 g

Spray angle 	Ordering no.									B Ø [mm]	E Ø [mm]	V̇ [l/min]								Spray diameter D at p=2 bar 	
	Type	Mat. no.		Code								p [bar]									
		1Y 316L SS	30 Brass	1/8 BSPT	1/4 BSPT	3/8 BSPT	1/2 BSPT	3/4 BSPP	1 BSPP			0.5	1.0	2.0	3.0	5.0	7.0	10.0	H = 200 mm	H = 500 mm	
45°	490.403	○	○	CA	-	-	-	-	-	1.25	1.25	0.57	0.76	1.00	1.18	1.44	1.65	1.90	160	400	
	490.523	○	○	CA	-	-	-	-	-	1.70	1.70	1.15	1.52	2.00	2.35	2.89	3.30	3.81	160	400	
	490.603	○	○	-	CC	CE*	-	-	-	2.00	2.00	1.81	2.39	3.15	3.70	4.54	5.20	6.00	160	400	
	490.643	○	○	-	-	CE*	-	-	-	2.45	2.45	2.30	3.03	4.00	4.70	5.77	6.60	7.61	160	400	
	490.683	-	○	-	-	CE	-	-	-	2.55	2.55	2.87	3.79	5.00	5.88	7.21	8.25	9.52	160	400	
	490.703	-	○	-	-	CE	-	-	-	2.65	2.65	3.22	4.24	5.60	6.59	8.08	9.24	10.66	160	400	
	490.723	○	○	-	-	CE	-	-	-	2.85	2.85	3.62	4.77	6.30	7.41	9.09	10.40	11.99	160	400	
	490.783	-	○	-	-	-	CG	-	-	3.45	3.45	5.17	6.82	9.00	10.58	12.98	14.85	17.12	160	400	
490.843	-	○	-	-	-	CG	-	-	3.80	3.80	7.18	9.47	12.50	14.70	18.03	20.63	23.80	160	400		
60°	490.404	○	○	CA	-	-	-	-	-	1.15	1.15	0.57	0.76	1.00	1.18	1.44	1.65	1.90	220	560	
	490.444	○	-	CA	-	-	-	-	-	1.25	1.25	0.72	0.95	1.25	1.47	1.80	2.06	2.38	220	560	
	490.484	○	○	CA	-	-	-	-	-	1.45	1.45	0.92	1.21	1.60	1.88	2.31	2.64	3.05	220	560	
	490.524	○	○	CA	-	-	-	-	-	1.60	1.60	1.15	1.52	2.00	2.35	2.89	3.30	3.81	220	560	
	490.564	○	○	CA	-	-	-	-	-	1.80	1.80	1.44	1.89	2.50	2.94	3.61	4.13	4.76	220	560	
	490.604	○	○	CA	CC	CE	-	-	-	2.05	2.05	1.81	2.39	3.15	3.70	4.54	5.20	6.00	220	560	

*Only available in material 30 · B = Bore diameter · E = Narrowest free cross section

Continued on next page.



Axial-flow full cone nozzles Series 490 / 491

NEW Patent pending



Spray angle 	Ordering no.									B Ø [mm]	E Ø [mm]	V̇ [l/min]								Spray diameter D at p=2 bar 	
	Type	Mat. no.		Code								p [bar]									
		1Y	30	1/8 BSPT	1/4 BSPT	3/8 BSPT	1/2 BSPT	3/4 BSPP	1 BSPP			0.5	1.0	2.0	3.0	5.0	7.0	10.0			
		316L SS	Brass																		
60°	490.644	○	○	-	CC	CE	-	-	-	2.30	2.30	2.30	3.03	4.00	4.70	5.77	6.60	7.61	220	560	
	490.684	○	○	-	CC	CE	-	-	-	2.60	2.60	2.87	3.79	5.00	5.88	7.21	8.25	9.52	220	560	
	490.724	○	○	-	CC	CE	-	-	-	2.95	2.80	3.62	4.77	6.30	7.41	9.09	10.40	11.99	220	560	
	490.764	○	○	-	-	CE	-	-	-	3.25	3.25	4.59	6.06	8.00	9.41	11.54	13.20	15.22	220	560	
	490.804	○	○	-	-	CE	-	-	-	3.70	3.70	5.74	7.58	10.00	11.76	14.43	16.51	19.04	220	560	
	490.844	○	○	-	-	-	CG	-	-	4.05	4.05	7.18	9.47	12.50	14.70	18.03	20.63	23.80	220	560	
	490.884	○	○	-	-	-	CG	-	-	4.65	4.65	9.19	12.13	16.00	18.82	23.08	26.41	30.46	220	560	
	490.924	○	○	-	-	-	-	AK	-	5.20	5.20	11.49	15.16	20.00	23.52	28.85	33.01	38.07	220	560	
	490.964	○	○	-	-	-	-	AK	-	5.80	5.80	14.36	18.95	25.00	29.40	36.07	41.26	47.59	220	560	
	491.044	○	○	-	-	-	-	-	AM	7.25	7.25	22.97	30.31	40.00	47.04	57.71	66.02	76.15	220	560	
	491.084	○	○	-	-	-	-	-	AM	8.15	8.15	28.72	37.89	50.00	58.80	72.14	82.53	95.18	220	560	
90°	490.406	○	○	CA	-	-	-	-	-	1.20	1.20	0.57	0.76	1.00	1.18	1.44	1.65	1.90	380	860	
	490.446	-	○	CA	-	-	-	-	-	1.30	1.30	0.72	0.95	1.25	1.47	1.80	2.06	2.38	380	860	
	490.486	○	○	CA	-	-	-	-	-	1.45	1.45	0.92	1.21	1.60	1.88	2.31	2.64	3.05	380	860	
	490.526	○	○	CA	-	-	-	-	-	1.70	1.55	1.15	1.52	2.00	2.35	2.89	3.30	3.81	380	860	
	490.566	○	○	CA	-	-	-	-	-	1.90	1.90	1.44	1.89	2.50	2.94	3.61	4.13	4.76	380	860	
	490.606	○	○	CA	-	CE	-	-	-	2.10	2.05	1.81	2.39	3.15	3.70	4.54	5.20	6.00	380	860	
	490.646	○	○	-	CC	CE	-	-	-	2.40	2.40	2.30	3.03	4.00	4.70	5.77	6.60	7.61	390	960	
	490.686	○	○	-	CC	CE	-	-	-	2.70	2.70	2.87	3.79	5.00	5.88	7.21	8.25	9.52	390	960	
	490.726	○	○	-	CC	CE	-	-	-	3.20	2.80	3.62	4.77	6.30	7.41	9.09	10.40	11.99	390	960	
	490.746	○	○	-	-	CE	-	-	-	3.15	3.15	4.08	5.38	7.10	8.35	10.24	11.72	13.52	390	960	
	490.766	○	○	-	-	CE	-	-	-	3.40	3.40	4.59	6.06	8.00	9.41	11.54	13.20	15.22	390	960	
	490.806	○	○	-	-	CE	-	-	-	3.90	3.90	5.74	7.58	10.00	11.76	14.43	16.51	19.04	390	960	
	490.846	○	○	-	-	CE	-	-	-	4.65	4.00	7.18	9.47	12.50	14.70	18.03	20.63	23.80	390	960	
	490.886	○	○	-	-	-	CG	-	-	5.45	4.50	9.19	12.13	16.00	18.82	23.08	26.41	30.46	390	960	
	490.926	○	○	-	-	-	CG	-	-	5.90	4.50	11.49	15.16	20.00	23.52	28.85	33.01	38.07	390	960	
	490.966	○	○	-	-	-	CG	AK	-	6.55	4.85	14.36	18.95	25.00	29.40	36.07	41.26	47.59	390	960	
	491.006	○	○	-	-	-	-	AK	-	7.55	5.50	18.09	23.87	31.50	37.05	45.45	51.99	59.97	390	960	
	491.046	○	○	-	-	-	-	AK	-	8.60	6.60	22.97	30.31	40.00	47.04	57.71	66.02	76.15	390	960	
	491.086	○	○	-	-	-	-	-	AM	9.45	7.25	28.72	37.89	50.00	58.80	72.14	82.53	95.18	390	960	
	491.126	○	○	-	-	-	-	-	AM	10.40	8.00	36.18	47.75	63.00	74.09	90.89	103.98	119.93	390	960	
	491.146	○	-	-	-	-	-	-	AM	11.00	7.50	40.78	53.81	71.00	83.50	102.43	117.19	135.16	390	960	
120°	490.368	○	○	CA	-	-	-	-	-	0.85	0.65	0.36	0.48	0.63	0.74	0.91	1.04	1.20	680	1220	
	490.408	○	○	CA	-	-	-	-	-	1.20	1.20	0.57	0.76	1.00	1.18	1.44	1.65	1.90	680	1220	
	490.448	○	○	CA	-	-	-	-	-	1.30	1.30	0.72	0.95	1.25	1.47	1.80	2.06	2.38	680	1220	
	490.488	○	○	CA	-	-	-	-	-	1.45	1.45	0.92	1.21	1.60	1.88	2.31	2.64	3.05	680	1220	
	490.528	○	○	CA	-	-	-	-	-	1.70	1.70	1.15	1.52	2.00	2.35	2.89	3.30	3.81	680	1220	
	490.568	○	○	CA	-	-	-	-	-	1.90	1.90	1.44	1.89	2.50	2.94	3.61	4.13	4.76	680	1220	
	490.608	○	○	CA	-	-	-	-	-	2.10	2.05	1.81	2.39	3.15	3.70	4.54	5.20	6.00	680	1220	
	490.648	○	○	-	CC	CE	-	-	-	2.40	2.40	2.30	3.03	4.00	4.70	5.77	6.60	7.61	680	1330	
	490.688	○	○	-	CC	CE	-	-	-	2.75	2.75	2.87	3.79	5.00	5.88	7.21	8.25	9.52	680	1330	
	490.728	○	○	-	CC	CE	-	-	-	3.20	2.80	3.62	4.77	6.30	7.41	9.09	10.40	11.99	680	1330	
	490.748	○	○	-	-	CE	-	-	-	3.20	3.20	4.08	5.38	7.10	8.35	10.24	11.72	13.52	680	1330	
	490.768	○	○	-	-	CE	-	-	-	3.45	3.45	4.59	6.44	8.00	9.41	11.54	13.20	15.22	680	1330	
	490.808	○	○	-	-	CE	-	-	-	3.90	3.90	5.74	7.58	10.00	11.76	14.43	16.51	19.04	680	1330	
	490.848	○	○	-	-	CE	-	-	-	4.70	4.00	7.18	9.47	12.50	14.70	18.03	20.63	23.80	680	1330	
	490.888	○	○	-	-	-	CG	-	-	5.10	4.50	9.19	12.13	16.00	18.82	23.08	26.41	30.46	680	1330	
	490.928	○	○	-	-	-	CG	-	-	5.80	4.75	11.49	15.16	20.00	23.52	28.85	33.01	38.07	680	1330	
	490.968	○	○	-	-	-	CG	AK	-	6.65	4.85	14.36	18.95	25.00	29.40	36.07	41.26	47.59	680	1330	
	491.048	○	○	-	-	-	-	AK	-	9.20	5.85	22.97	30.31	40.00	47.04	57.71	66.02	76.15	680	1330	
	491.128	○	○	-	-	-	-	-	AM	10.80	7.75	36.18	47.75	63.00	74.09	90.89	103.98	119.93	680	1330	
	491.148	○	-	-	-	-	-	-	AM	11.40	7.65	40.78	53.81	71.00	83.50	102.43	117.19	135.16	680	1330	

B = Bore diameter · E = Narrowest free cross section

Other nozzle materials (special alloys, plastics)
are available on request.

Example Type + Material no. + Code = Ordering no.
for ordering: 490.644 + 1Y + CC = 490.644.1Y.CC

Conversion formula for the above series: $\dot{V}_2 = \dot{V}_1 \cdot \left(\frac{p_2}{p_1}\right)^{0.4}$
(≤ 10 bar)




Axial-flow full cone nozzles Series 460 / 461




**Very uniform spray pattern.
Large free cross-sections,
due to optimized
x-style swirl insert.**

Applications:

Cleaning and washing process, cooling of gaseous fluids and solids, surface spraying, spraying onto mats in air washers, improving of chemical reactions.



**Code
CA-CG**



**Code
AK**

Code	Dimensions [mm]				
	G	L ₁	L ₂	D	Hex/Flats
CA	1/8 BSPT	22.0	6.5	13.0	14
CC	1/4 BSPT	22.0	9.7	13.0	14
CE	3/8 BSPT	30.0	10.0	17.0	17
CG	1/2 BSPT	43.5	13.2	22.0	22
AK	3/4 BSPP	42.0	15.0	31.5	27

Subject to technical modifications.
Please enquire about the exact
dimensions if the installation situation
is critical!

Spray angle 	Ordering no.							B Ø [mm]	E Ø [mm]	V̇ [l/min]							Spray diameter D at p=2 bar 	
	Type	Mat. no.	Code							p [bar]								
			5E	PVDF	1/8 BSPT	1/4 BSPT	3/8 BSPT			1/2 BSPT	3/4 BSPP	0.5	1.0	2.0	3.0	5.0	7.0	10.0
60°	460. 644	○	-					CC	-									
	460. 964	○	-	-	-	-	AK	5.80	4.90	14.36	18.95	25.00	29.40	36.07	41.26	47.59	220	560
90°	460. 326	○	CA	-	-	-	-	0.80	0.55	0.23	0.30	0.40	0.47	0.58	0.66	0.76	380	860
	460. 406	○	CA	-	-	-	-	1.20	0.85	0.57	0.76	1.00	1.18	1.44	1.65	1.90	380	860
	460. 486	○	CA	-	-	-	-	1.45	1.20	0.92	1.21	1.60	1.88	2.31	2.64	3.05	380	860
	460. 526	○	CA	-	-	-	-	1.65	1.30	1.15	1.52	2.00	2.35	2.89	3.30	3.81	380	860
	460. 606	○	CA	-	CE	-	-	2.05	1.45	1.81	2.39	3.15	3.70	4.54	5.20	6.00	380	860
	460. 646	○	-	CC	-	-	-	2.30	1.80	2.30	3.03	4.00	4.70	5.77	6.60	7.61	390	960
	460. 726	○	-	-	CE	-	-	2.95	2.00	3.62	4.77	6.30	7.41	9.09	10.40	11.99	390	960
	460. 746	○	-	-	CE	-	-	3.30	1.90	4.08	5.38	7.10	8.35	10.24	11.72	13.52	390	960
	460. 766	○	-	-	CE	-	-	3.30	2.40	4.59	6.06	8.00	9.41	11.54	13.20	15.22	390	960
	460. 806	○	-	-	CE	-	-	3.70	2.70	5.74	7.58	10.00	11.76	14.43	16.51	19.04	390	960
	460. 846	○	-	-	CE	-	-	4.05	3.20	7.18	9.47	12.50	14.70	18.03	20.63	23.80	390	960
	460. 886	○	-	-	-	CG	-	4.70	3.10	9.19	12.13	16.00	18.82	23.08	26.41	30.46	390	960
	460. 966	○	-	-	-	CG	-	5.80	3.80	14.36	18.95	25.00	29.40	36.07	41.26	47.59	390	960
	461. 006	○	-	-	-	CG	-	6.40	3.80	18.09	23.87	31.50	37.05	45.45	51.99	59.97	390	960
	461. 046	⊗	-	-	-	-	AK	7.20	5.30	22.97	30.31	40.00	47.04	57.71	66.02	76.15	390	960

B = Bore diameter · E = Narrowest free cross section
⊗ material PP (material no. 53), connection 3/4 BSPT (Code CK)

Continued on next page.

Example **Type** + **Material no.** + **Code** = **Ordering no.**
for ordering: 460.644 + 5E + CC = 460.644.5E.CC



Axial-flow full cone nozzles Series 460 / 461



Spray angle 	Ordering no.							B Ø [mm]	E Ø [mm]	V̇ [l/min]							Spray diameter D at p=2 bar H = 200 mm H = 500 mm	
	Type	Mat. no.	Code							p [bar]								
		5E	PVDF	1/8 BSPT	1/4 BSPT	3/8 BSPT	1/2 BSPT			3/4 BSPT	0.5	1.0	2.0	3.0	5.0	7.0	10.0	
120°	460. 408	○	CA	-	-	-	-	1.20	0.85	0.57	0.76	1.00	1.18	1.44	1.65	1.90	680	1220
	460. 488	○	CA	-	-	-	-	1.50	1.00	0.92	1.21	1.60	1.88	2.31	2.64	3.05	680	1220
	460. 528	○	CA	-	-	-	-	1.65	1.20	1.15	1.52	2.00	2.35	2.89	3.30	3.81	680	1220
	460. 608	○	CA	-	-	-	-	2.10	1.40	1.81	2.39	3.5	3.70	4.54	5.20	6.00	680	1220
	460. 648	○	-	CC	-	-	-	2.45	1.60	2.30	3.03	4.00	4.70	5.77	6.60	7.61	680	1330
	460. 728	○	-	-	CE	-	-	3.10	1.90	3.62	4.77	6.30	7.41	9.09	10.40	11.99	680	1330
	460. 748	○	-	-	CE	-	-	3.30	1.90	4.08	5.38	7.10	8.35	10.24	11.72	13.52	680	1330
	460. 768	○	-	-	CE	-	-	3.50	1.90	4.59	6.44	8.00	9.41	11.54	13.20	15.22	680	1330
	460. 808	○	-	-	CE	-	-	3.80	2.40	5.74	7.58	10.00	11.76	14.43	16.51	19.04	680	1330
	460. 848	○	-	-	CE	-	-	4.20	2.70	7.18	9.47	12.50	14.70	18.03	20.63	23.80	680	1330
	460. 888	○	-	-	-	CG	-	4.60	3.10	9.19	12.13	16.00	18.82	23.08	26.41	30.46	680	1330
	460. 968	○	-	-	-	CG	-	5.90	4.10	14.36	18.95	25.00	29.40	36.07	41.26	47.59	680	1330
	461. 048	⊗	-	-	-	-	AK	7.60	4.90	22.97	30.31	40.00	47.04	57.71	66.02	76.15	680	1330

B = Bore diameter · E = Narrowest free cross section

⊗ material PP (material no. 53), connection 3/4 BSPT (Code CK)

Example	Type	+	Material no.	+	Code	=	Ordering no.
for ordering:	460.408	+	5E	+	CA	=	460.408.5E.CA

Conversion formula for the above series: $\dot{V}_2 = \dot{V}_1 * \left(\frac{p_2}{p_1} \right)^{0.4}$
(≤ 10 bar)



Tangential-flow full cone nozzles

Series 422 / 423



Tangentially arranged liquid supply. Without swirl inserts. Non-clogging. Stable spray angle. Uniform spray.

Applications:


Cleaning and washing process, cooling of gaseous fluids and solids, surface spraying, spraying onto mats in air washers, improving on chemical reactions, continuous casting, foam control.



(Mat. no. 1Y)




1/4" - 3/8" version

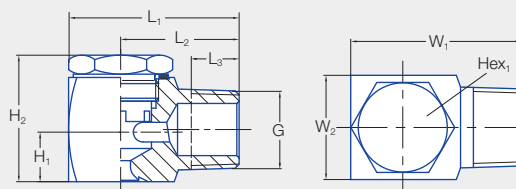

Material: 316L SS / Brass



1/2" - 1" version

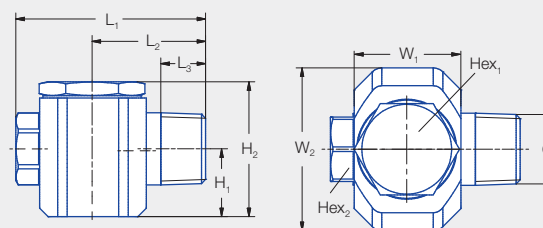

Material: 316L SS / Brass

Dimensions [mm]										Weight 316L SS
G	L ₁	L ₂	L ₃	H ₁	H ₂	W ₁	W ₂	Hex ₁	Hex ₂	
1/4 BSPT	28.0	20.0	9.7	8.0	21.0	15.6	16.0	11	-	44 g
3/8 BSPT	36.0	25.0	10.1	11.0	26.7	23.2	22.0	19	-	101 g
1/2 BSPT	56.0	33.5	13.2	20.0	40.0	32.0	48.0	27	19	370 g
3/4 BSPT	65.5	38.5	14.5	23.5	57.0	40.0	63.0	36	27	830 g
1 BSPT	85.0	48.5	16.8	27.3	66.0	55.0	78.0	41	36	1581 g

Spray angle 	Ordering no.								B Ø [mm]	E Ø [mm]	V̇ [l/min]						Spray diameter D at p = 1-10 bar	
	Type	Mat.no.		Code							p [bar]						H = 200 mm	H = 500 mm
		30 Brass	1Y 316L SS	1/4 BSPT	3/8 BSPT	1/2 BSPT	3/4 BSPT	1 BSPT			0.5	1.0	2.0	3.0	5.0	10.0		
60°	422. 644	○	○	-	CE	-	-	-	3.00	3.00	2.00	2.83	4.00	4.90	6.32	8.94	225	510
90°	422. 406	○	○	CC	-	-	-	-	1.50	1.45	0.50	0.71	1.00	1.22	1.58	2.24	380	860
	422. 486	-	○	CC	-	-	-	-	1.90	1.80	0.80	1.13	1.60	1.96	2.53	3.58	380	860
	422. 566	○	○	CC	-	CG	-	-	2.30	2.20	1.25	1.77	2.50	3.06	3.95	5.59	380	860
	422. 606	○	○	-	CE	-	-	-	2.60	2.50	1.57	2.23	3.15	3.86	4.98	7.04	380	860
	422. 646	○	○	-	CE	-	-	-	3.00	2.90	2.00	2.83	4.00	4.90	6.32	8.94	390	960
	422. 726	○	-	-	CE	-	-	-	3.70	3.60	3.15	4.45	6.30	7.72	9.96	14.09	390	960
	422. 766	-	○	-	CE	-	-	-	4.15	4.10	4.00	5.66	8.00	9.80	12.65	17.89	390	960
	422. 806	○	-	-	CE	-	-	-	4.65	4.60	5.00	7.07	10.00	12.25	15.81	22.36	390	960
	422. 846	○	○	-	CE	-	-	-	5.20	5.10	6.25	8.84	12.50	15.31	19.76	27.95	390	960
	422. 886	○	○	-	CE	-	-	-	5.80	5.70	8.00	11.31	16.00	19.60	25.30	35.78	390	960
422. 966	-	○	-	-	CG	-	-	8.00	8.00	12.50	17.68	25.00	30.62	39.53	55.90	390	960	

B = Bore diameter · E = Narrowest free cross section

Continued on next page.

Example Type + Material-no. + Code = Ordering no.
for ordering: 422. 644 + 30 + CE = 422. 644. 30. CE



Tangential-flow full cone nozzles

Series 422 / 423




Spray angle 	Ordering no.								B Ø [mm]	E Ø [mm]	V̇ [l/min]						Spray diameter D at p = 1-10 bar 	
	Type	Mat.no.		Code							p [bar]						H = 200 mm	H = 500 mm
		30 Brass	1Y 316L SS	1/4 BSPT	3/8 BSPT	1/2 BSPT	3/4 BSPT	1 BSPT			0.5	1.0	2.0	3.0	5.0	10.0		
90°	422. 488	○	○	CC	-	-	-	-	1.90	1.80	0.80	1.13	1.60	1.96	2.53	3.58	680	1220
	422. 568	-	○	CC	-	-	-	-	2.30	2.20	1.25	1.77	2.50	3.06	3.95	5.59	680	1220
	422. 608	○	○	CC	-	CG	-	-	2.60	2.50	1.57	2.23	3.15	3.86	4.98	7.04	680	1600
	422. 728	○	○	-	CE	-	-	-	3.70	3.60	3.15	4.45	6.30	7.72	9.96	14.09	680	1600
	422. 808	○	○	-	CE	-	-	-	4.65	4.60	5.00	7.07	10.00	12.25	15.81	22.36	680	1600
	422. 848	○	-	-	CE	-	-	-	5.20	5.10	6.25	8.84	12.50	15.31	19.76	27.95	680	1600
	422. 888	-	○	-	CE	-	-	-	5.80	5.70	8.00	11.31	16.00	19.60	25.30	35.78	680	1600
	422. 928	○	-	-	CE	-	-	-	7.30	7.30	10.00	14.14	20.00	24.49	31.62	44.72	680	1600
	422. 968	○	○	-	CE	-	-	-	8.00	8.00	12.50	17.68	25.00	30.62	39.53	55.90	680	1600
	423. 008	○	○	-	CE	-	-	-	8.70	8.70	15.75	22.27	31.50	38.88	49.81	70.44	680	1600
	423. 128	-	○	-	-	CG	-	-	12.70	12.30	31.50	44.55	63.00	77.16	99.61	140.87	680	1600
	423. 208	○	○	-	CE	-	-	-	19.00	16.00	50.00	70.71	100.00	122.47	158.11	223.61	680	1600

B = Bore diameter · E = Narrowest free cross section

Cost-efficient design
thanks to metal injection
molding. Tangentially
arranged liquid supply.
Without swirl inserts.
Non-clogging. Stable spray
angle. Uniform spray.

Applications:

Pasteurization, cleaning and
washing process, cooling of
gaseous fluids and solids,
surface spraying, spraying
onto mats in air washers,
improving on chemical
reactions, continuous casting,
foam control.

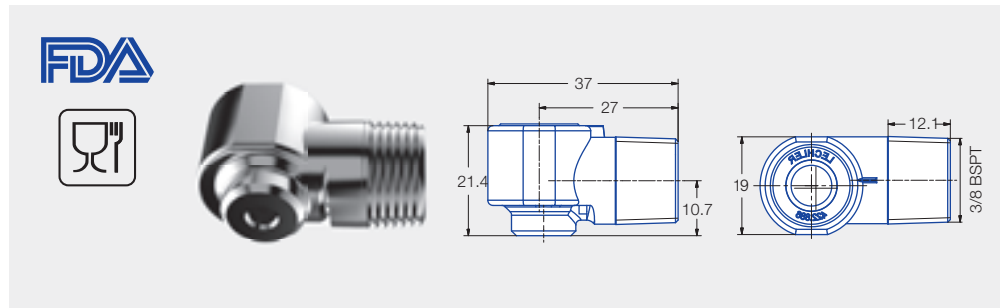

Spray angle 	Ordering no.			B Ø [mm]	E Ø [mm]	V̇ [l/min]						Spray diameter D at p = 1-10 bar 	
	Type	Mat.no.	Code			p [bar]						H = 200 mm	H = 500 mm
		1Y 316L SS	3/8 BSPT			0.5	1.0	2.0	3.0	5.0	10.0		
90°	422. 886	○	87	5.80	5.70	8.00	11.31	16.00	19.60	25.30	35.78	390	960

B = Bore diameter · E = Narrowest free cross section

Example Type + Material-no. + Code = Ordering no.
for ordering: 422. 886 + 1Y + 87 = 422. 886. 1Y. 87

Conversion formula for the above series: $\dot{V}_2 = \dot{V}_1 \cdot \sqrt{\frac{p_2}{p_1}}$



Tangential-flow full cone nozzles

Plastic version


Series 422 / 423



Tangentially arranged liquid supply. Without swirl inserts. Non-clogging. Stable spray angle. Uni-form spray.

Applications:

Cleaning and washing processes, surface spraying, bottle cleaning, keg cleaning, sausage showers, foam control, degassing, pasteurization.

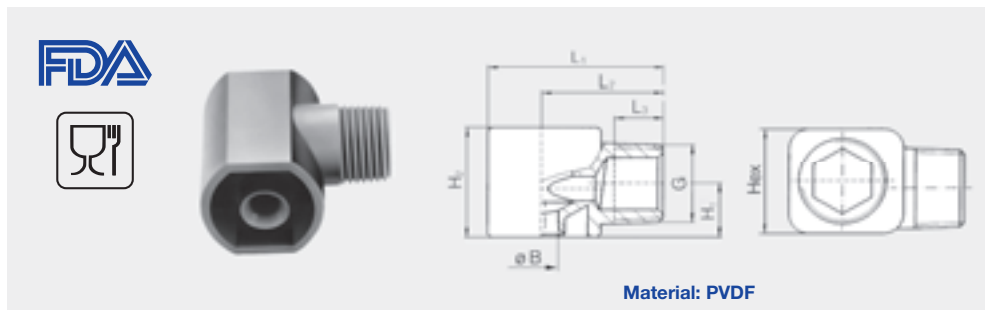

Dimensions [mm]							Weight
G	L ₁	L ₂	L ₃	H ₁	H ₂	Hex	
1/4 BSPT	28.0	20.0	9.8	8.0	16.0	16.0	7 g
3/8 BSPT	36.0	25.0	10.1	11.2	23.0	22.0	16 g
1/2 BSPT	49.5	33.5	13.2	19.2	38.0	32.0	40 g
3/4 BSPT	58.5	38.5	18.5	24.5	50.0	41.0	50 g

Spray angle 	Ordering no.						B Ø [mm]	E Ø [mm]	V̇ [l/min]						Spray diameter D at p = 1-10 bar 	
	Type	Mat. no.	Code						p [bar]							
		PVDF	1/4 BSPT	3/8 BSPT	1/2 BSPT	3/4 BSPT			0.5	1.0	2.0	3.0	5.0	10.0	H = 200 mm	H = 500 mm
60°	422.724	○	-	CE	-	-	3.60	3.60	3.15	4.45	6.30	7.72	9.96	14.09	225	510
90°	422.406	○	CC	-	-	-	1.50	1.45	0.50	0.71	1.00	1.22	1.58	2.24	380	860
	422.566	○	CC	-	-	-	2.30	2.20	1.25	1.77	2.50	3.06	3.95	5.59	380	860
	422.606	○	-	CE	-	-	2.60	2.50	1.57	2.23	3.15	3.86	4.98	7.04	380	860
	422.646	○	-	CE	-	-	3.00	2.90	2.00	2.83	4.00	4.90	6.32	8.94	390	960
	422.726	○	-	CE	-	-	3.70	3.60	3.15	4.45	6.30	7.72	9.96	14.09	390	960
	422.806	○	-	CE	-	-	4.65	4.60	5.00	7.07	10.00	12.25	15.81	22.36	390	960
	422.846	○	-	CE	-	-	5.20	5.10	6.25	8.84	12.50	15.31	19.76	27.95	390	960
	422.886	○	-	CE	-	-	5.80	5.70	8.00	11.31	16.00	19.60	25.30	35.78	390	960
	422.926	○	-	-	CG	-	7.30	7.30	10.00	14.14	20.00	24.49	31.62	44.72	390	960
	422.966	○	-	-	CG	-	8.00	8.00	12.50	17.68	25.00	30.62	39.53	55.90	390	960
	423.006	○	-	-	CG	-	8.70	8.70	15.75	22.27	31.50	38.58	49.81	70.44	390	960
423.126	○	-	-	-	CK	12.00	12.00	31.50	44.55	63.00	77.16	99.61	140.87	390	960	
120°	422.408	○	CC	-	-	-	1.50	1.45	0.50	0.71	1.00	1.22	1.58	2.24	680	1220
	422.448	○	CC	-	-	-	1.65	1.60	0.62	0.88	1.25	1.53	1.98	2.80	680	1220
	422.488	○	CC	-	-	-	1.90	1.80	0.80	1.13	1.60	1.96	2.53	3.58	680	1220
	422.568	○	CC	-	-	-	2.30	2.20	1.25	1.77	2.50	3.06	3.95	5.59	680	1220
	422.728	○	-	CE	-	-	3.70	3.60	3.15	4.45	6.30	7.72	9.96	14.09	680	1600
	422.888	○	-	CE	-	-	5.80	5.70	8.00	11.31	16.00	19.60	25.30	35.78	680	1600
	422.968	○	-	-	CG	-	8.00	8.00	12.50	17.68	25.00	30.62	39.53	55.90	680	1600
	423.008	○	-	-	CG	-	8.70	8.70	15.75	22.27	31.50	38.58	49.81	70.44	680	1600
	423.128	○	-	-	-	CK	12.70	12.30	31.50	44.55	63.00	77.16	99.61	140.87	680	1600

B = bore diameter · E = narrowest free cross section

Example Type + Material-no. + Code = Ordering no.
of ordering: 422. 724 + 5E + CE = 422. 724. 5E. CE




Flat fan nozzles Series 632 / 633



Standard design with conical, self-sealing thread connection. Stable spray angle. Uniform, parabolical distribution of liquid. Spray pipes equipped with these nozzles show an extremely uniform total distribution of liquid.

Applications:

Cleaning (e.g. surfaces, filters, belts), crate washers, lubricating, coating.

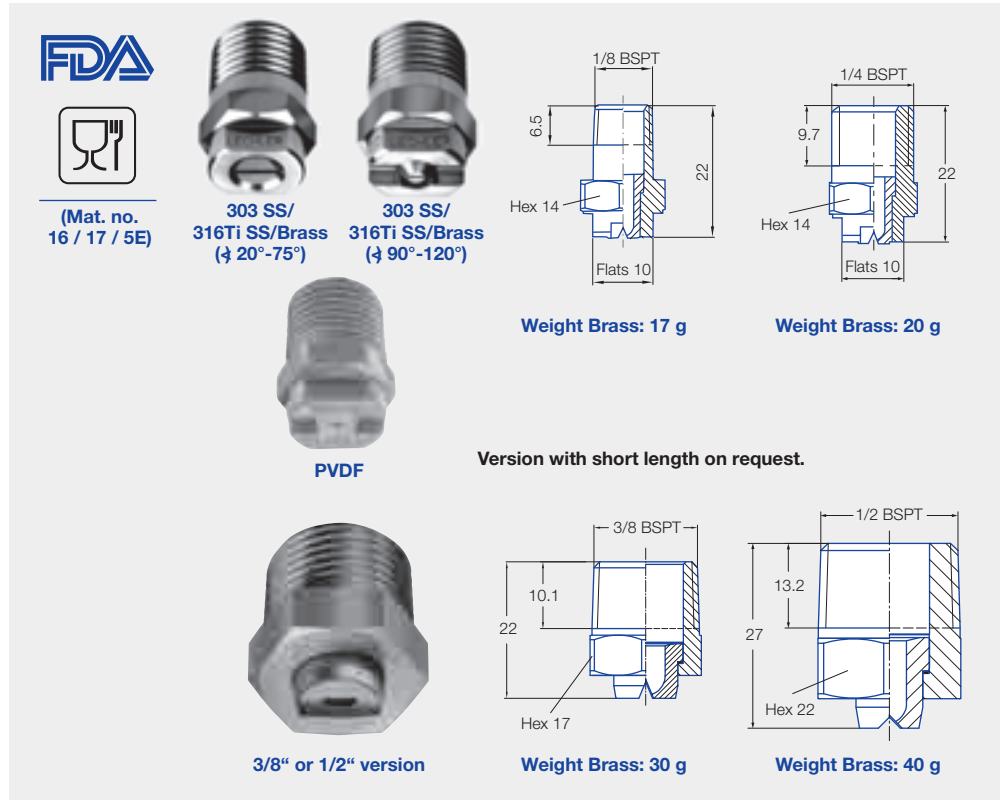

Spray angle 	Ordering no.									A Ø [mm]	E Ø [mm]	V [l/min]								Spray width B at p=2 bar 	
	Type	Mat. no.				Code						p [bar]									
		16 ¹	17 ²	30	5E							0.5	1.0	2.0	3.0	5.0	7.0	10.0	H = 200 mm	H = 500 mm	
20°	632. 301	○	○	○	○	CA	CC	-	-	0.70	0.60	0.16*	0.23*	0.32	0.39	0.51	0.60	0.72	65	120	
	632. 361	○	○	○	○	CA	CC	-	-	1.00	0.80	0.31*	0.44*	0.63	0.77	1.00	1.18	1.40	70	130	
	632. 441	○	○	○	○	CA	CC	-	-	1.35	1.10	0.62*	0.88	1.25	1.53	1.98	2.34	2.80	75	145	
	632. 481	○	○	○	○	CA	CC	-	-	1.50	1.20	0.80*	1.13	1.60	1.96	2.53	2.99	3.58	75	150	
30°	632. 302	○	○	○	○	CA	CC	-	-	0.60	0.50	0.16*	0.23*	0.32	0.39	0.51	0.60	0.72	120	235	
	632. 362	○	○	○	○	CA	CC	-	-	1.00	0.70	0.31*	0.44*	0.63	0.77	1.00	1.18	1.40	120	235	
	632. 402	○	○	○	○	CA	CC	-	-	1.20	0.90	0.50*	0.71	1.00	1.23	1.58	1.87	2.24	120	235	
	632. 482	○	○	○	○	CA	CC	-	-	1.50	1.10	0.80*	1.13	1.60	1.96	2.53	2.99	3.58	120	235	
	632. 562	○	○	○	○	CA	CC	-	-	2.00	1.50	1.25	1.77	2.50	3.06	3.95	4.68	5.59	120	235	
	632. 642	○	○	○	-	-	CC	-	-	2.50	1.80	2.00	2.83	4.00	4.90	6.33	7.48	8.94	120	240	
	632. 722	○	○	○	-	-	CC	-	-	3.00	2.40	3.15	4.46	6.30	7.72	9.96	11.79	14.09	125	240	
	632. 762	○	○	○	-	-	CC	-	-	3.50	2.70	4.00	5.66	8.00	9.80	12.65	14.97	17.89	125	240	
	632. 802	○	○	○	-	-	CC	-	-	4.00	3.10	5.00	7.07	10.00	12.25	15.81	18.71	22.36	130	250	

1) We reserve the right to deliver 303 SS or 304 SS under the material no. 16.

2) We reserve the right to deliver 316Ti SS or 316L SS under the material no. 17.

A = Equivalent bore diameter · E = Narrowest free cross section

*Differing spray pattern

Subject to technical modifications.

Example	Type	+	Material-no.	+	Code	=	Ordering no.
for ordering:	632. 301	+	16	+	CA	=	632. 301. 16. CC

Conversion formula for the above series: $\dot{V}_2 = \dot{V}_1 \cdot \sqrt{\frac{p_2}{p_1}}$



Flat fan nozzles

Series 632 / 633



Spray angle 	Ordering no.									A Ø [mm]	E Ø [mm]	V̇ [l/min]								Spray width B at p=2 bar 	
	Type	Mat. no.				Code						p [bar]									
		303 SS/ 304 SS	316Ti SS/ 316L SS	30	5E	1/8 BSPT	1/4 BSPT	3/8 BSPT	1/2 BSPT			0.5	1.0	2.0	3.0	5.0	7.0	10.0			
45°	632. 303	○	○	○	-	CA	CC	-	-	0.70	0.50	0.16*	0.23*	0.32	0.39	0.51	0.60	0.72	150	270	
	632. 363	○	○	○	○	CA	CC	-	-	1.00	0.60	0.31*	0.44*	0.63	0.77	1.00	1.18	1.40	155	280	
	632. 403	○	○	○	○	CA	CC	-	-	1.20	0.90	0.50*	0.71	1.00	1.23	1.58	1.87	2.24	175	320	
	632. 483	○	○	○	○	CA	CC	-	-	1.50	1.10	0.80*	1.13	1.60	1.96	2.53	2.99	3.58	180	340	
	632. 563	○	○	○	○	CA	CC	-	-	2.00	1.40	1.25	1.77	2.50	3.06	3.95	4.68	5.59	185	355	
	632. 643	○	○	○	○	CA	CC	-	-	2.50	1.80	2.00	2.83	4.00	4.90	6.33	7.48	8.94	195	370	
	632. 673	○	○	○	-	-	CC	CE	-	2.70	2.00	2.83	3.36	4.75	5.82	7.51	8.89	10.62	200	375	
	632. 723	○	○	○	-	-	CC	CE	-	3.00	2.40	3.15	4.46	6.30	7.72	9.96	11.79	14.09	200	375	
	632. 763	○	○	○	-	-	CC	CE	-	3.50	2.60	4.00	5.66	8.00	9.80	12.65	14.97	17.89	200	380	
	632. 803	○	○	○	-	-	CC	CE	CG	4.00	3.00	5.00	7.07	10.00	12.25	15.81	18.71	22.36	205	385	
	632. 843	○	○***	○	-	-	CC	-	CG	4.50	3.40	6.25	8.84	12.50	15.31	19.76	23.39	27.95	205	385	
	632. 883	○	○	○	-	-	-	-	CG	5.00	3.80	8.00	11.31	16.00	19.60	25.30	29.93	35.78	220	440	
632. 923	○	○	○	-	-	-	-	CG	5.50	4.20	10.00	14.14	20.00	24.50	31.62	37.42	44.72	220	440		
632. 963	○	○	○	-	-	-	-	CG	6.00	4.40	12.50	17.68	25.00	30.62	39.53	46.77	55.90	220	440		
60°	632. 304	○	○	○	○	CA	CC	-	-	0.70	0.40	0.16*	0.23*	0.32	0.39	0.51	0.60	0.72	215	425	
	632. 334	○	○	○	○	CA	CC	-	-	0.90	0.50	0.22*	0.32*	0.45	0.55	0.71	0.84	1.01	220	440	
	632. 364	○	○	○	○	CA	CC	-	-	1.00	0.60	0.31*	0.44*	0.63	0.77	1.00	1.18	1.40	230	460	
	632. 404	○	○	○	○	CA	CC	-	-	1.20	0.80	0.50*	0.71	1.00	1.23	1.58	1.87	2.24	245	485	
	632. 444	○	○	○	○	CA	CC	-	-	1.35	0.90	0.62*	0.88	1.25	1.53	1.98	2.34	2.80	255	495	
	632. 484	○	○	○	○	CA	CC	-	-	1.50	1.00	0.80*	1.13	1.60	1.96	2.53	2.99	3.58	260	510	
	632. 514	○	○	○	○	CA	CC	-	-	1.65	1.10	0.95*	1.34	1.90	2.33	3.00	3.56	4.25	270	520	
	632. 564	○	○	○	○	CA	CC	-	-	2.00	1.30	1.25	1.77	2.50	3.06	3.95	4.68	5.59	280	535	
	632. 604	○	○	○	○	CA	CC	-	-	2.20	1.50	1.58	2.23	3.15	3.86	4.98	5.89	7.04	290	550	
	632. 644	○	○	○	○**	-	CC	CE	-	2.50	1.60	2.00	2.83	4.00	4.90	6.33	7.48	8.94	295	565	
	632. 674	○	○	○	○**	-	CC	CE	-	2.70	1.80	2.38	3.36	4.75	5.82	7.51	8.89	10.62	300	575	
	632. 724	○	○	○	○**	-	CC	CE	-	3.00	2.10	3.15	4.46	6.30	7.72	9.96	11.79	14.09	305	590	
	632. 764	○	○	○	-	-	CC	CE	-	3.50	2.30	4.00	5.66	8.00	9.80	12.65	14.97	17.89	310	595	
	632. 804	○	○***	○	○**	-	CC	-	CG	4.00	2.60	5.00	7.07	10.00	12.25	15.81	18.71	22.36	310	595	
	632. 844	○	○***	○	○**	-	CC	-	CG	4.50	3.00	6.25	8.84	12.50	15.31	19.76	23.39	27.95	310	590	
	632. 884	○	○***	○	○**	-	CC	-	CG	5.00	3.40	8.00	11.31	16.00	19.60	25.30	29.93	35.78	300	570	
	632. 924	○	○	○	-	-	-	-	CG	5.50	4.10	10.00	14.14	20.00	24.50	31.62	37.42	44.72	330	630	
	632. 964	○	○	○	-	-	-	-	CG	6.00	4.20	12.50	17.68	25.00	30.62	39.53	46.77	55.90	330	630	
	633. 004	○	○	-	-	-	-	-	CG	7.00	4.80	15.75	22.27	31.50	38.57	49.80	58.92	70.43	330	630	
	633. 044	○	○	○	-	-	-	-	CG	8.00	5.50	20.00	28.28	40.00	48.99	63.25	74.83	89.44	340	640	
	633. 084	○	○	○	-	-	-	-	CG	9.00	6.80	25.00	35.36	50.00	61.24	79.06	93.54	111.80	340	640	
75°	632. 145	-	○	○	-	CA	CC	-	-	0.20	0.12	-	0.04*	0.05	0.06	0.08	0.09	0.11	280	550	
	632. 165	-	○	○	-	CA	CC	-	-	0.20	0.14	-	0.05*	0.07	0.08	0.10	0.12	0.15	290	560	
	632. 185	-	○	○	-	CA	CC	-	-	0.20	0.16	-	0.06*	0.08	0.10	0.13	0.15	0.18	300	575	
	632. 215	-	○	○	-	CA	CC	-	-	0.40	0.20	-	0.08*	0.11	0.14	0.18	0.21	0.25	300	580	
	632. 245	-	○	○	-	CA	CC	-	-	0.50	0.30	-	0.12*	0.16	0.20	0.26	0.30	0.36	310	585	
	632. 275	-	○	○	-	CA	CC	-	-	0.60	0.30	0.11*	0.16*	0.22	0.27	0.35	0.41	0.49	310	590	

1) We reserve the right to deliver 303 SS or 304 SS under the material no. 16.
2) We reserve the right to deliver 316Ti SS or 316L SS under the material no. 17.
A = Equivalent bore diameter · E = Narrowest free cross section
*Differring spray pattern
**Only available with code CC.
***Only available with code CG.
Subject to technical modifications.

Continued on next page.

Example	Type	+	Material-no.	+	Code	=	Ordering no.
for ordering:	632. 303.	+	16	+	CA	=	632. 303. 16. CA



Flat fan nozzles

Series 632 / 633



Spray angle 	Ordering no.								A Ø [mm]	E Ø [mm]	V̇ [l/min]							Spray width B at p=2 bar 		
	Type	Mat. no.				Code					p [bar]									
		16 ¹ 303 SS/ 304 SS	17 ² 316Ti SS/ 316L SS	30 Brass	5E PVDF	1/8 BSPT	1/4 BSPT	3/8 BSPT			1/2 BSPT	0.5	1.0	2.0	3.0	5.0	7.0	10.0	H = 200 mm	H = 500 mm
90°	632. 216	○	-	○	-	CA	CC	-	-	0.40	0.20	-	0.08*	0.11	0.14	0.18	0.21	0.25	370	700
	632. 276	○	-	○	-	CA	CC	-	-	0.60	0.30	0.11*	0.16*	0.22	0.27	0.35	0.41	0.49	375	720
	632. 306	○	○	○	○	CA	CC	-	-	0.70	0.40	0.16*	0.23*	0.32	0.39	0.51	0.60	0.72	380	740
	632. 336	○	○	○	○	CA	CC	-	-	0.90	0.50	0.22*	0.32*	0.45	0.55	0.71	0.84	1.01	415	800
	632. 366	○	○	○	○	CA	CC	-	-	1.00	0.50	0.31*	0.44*	0.63	0.77	1.00	1.18	1.41	420	810
	632. 406	○	○	○	○	CA	CC	-	-	1.20	0.70	0.50*	0.71	1.00	1.23	1.58	1.87	2.24	430	820
	632. 446	○	○	○	○	CA	CC	-	-	1.35	0.80	0.62*	0.88	1.25	1.53	1.98	2.34	2.80	435	830
	632. 486	○	○	○	○	CA	CC	-	-	1.50	0.80	0.80*	1.13	1.60	1.96	2.53	2.99	3.58	440	835
	632. 516	○	○	○	○	CA	CC	-	-	1.65	0.90	0.95*	1.34	1.90	2.33	3.00	3.56	4.25	440	840
	632. 566	○	○	○	○	CA	CC	-	-	2.00	1.10	1.25	1.77	2.50	3.06	3.95	4.68	5.59	445	850
	632. 606	○	○	○	○	CA	CC	-	-	2.20	1.20	1.58	2.23	3.15	3.86	4.98	5.89	7.04	450	860
	632. 646	○	○	○	○**	-	CC	CE	-	2.50	1.30	2.00	2.83	4.00	4.90	6.33	7.48	8.94	455	865
	632. 676	○	○	○	○**	-	CC	CE	-	2.70	1.40	2.38	3.36	4.75	5.82	7.51	8.89	10.62	465	875
	632. 726	○	○	○	○**	-	CC	CE	-	3.00	1.70	3.15	4.46	6.30	7.72	9.96	11.79	14.09	470	885
	632. 766	○	○	○	○**	-	CC	CE	-	3.50	1.90	4.00	5.66	8.00	9.80	12.65	14.97	17.89	475	890
	632. 806	○	○***	○	○**	-	CC	-	CG	4.00	2.40	5.00	7.07	10.00	12.25	15.81	18.71	22.36	480	900
	632. 846	○	○***	○	○**	-	CC	-	CG	4.50	2.40	6.25	8.84	12.50	15.31	19.76	23.39	27.95	480	900
	632. 886	○	○***	○	○**	-	CC	-	CG	5.00	3.10	8.00	11.31	16.00	19.60	25.30	29.93	35.78	480	910
632. 926	○	○	○	-	-	-	-	CG	5.50	3.60	10.00	14.14	20.00	24.50	31.62	37.42	44.72	525	1020	
632. 966	○	○	○	-	-	-	-	CG	6.00	3.90	12.50	17.68	25.00	30.62	39.53	46.77	55.90	525	1020	
120°	632. 187	○	○	○	○	CA	CC	-	-	0.35	0.20	-	0.06*	0.08	0.10	0.13	0.15	0.18	630	1200
	632. 217	○	○	○	○	CA	CC	-	-	0.40	0.20	-	0.08*	0.11	0.14	0.18	0.21	0.25	640	1210
	632. 247	○	○	○	○	CA	CC	-	-	0.50	0.20	-	0.12*	0.16	0.20	0.26	0.30	0.36	650	1230
	632. 277	○	○	○	○	CA	CC	-	-	0.60	0.30	-	0.16*	0.22	0.27	0.35	0.41	0.49	660	1250
	632. 307	○	○	○	○	CA	CC	-	-	0.70	0.30	0.16*	0.23*	0.32	0.39	0.51	0.60	0.72	660	1250
	632. 337	○	○	○	○	CA	CC	-	-	0.90	0.40	0.22*	0.32*	0.45	0.55	0.71	0.84	1.01	670	1270
	632. 367	○	○	○	○	CA	CC	-	-	1.00	0.50	0.31*	0.44*	0.63	0.77	1.00	1.18	1.41	670	1270
	632. 407	○	○	○	○	CA	CC	-	-	1.20	0.60	0.50*	0.71	1.00	1.23	1.58	1.87	2.24	670	1270
	632. 447	○	○	○	○	CA	CC	-	-	1.35	0.60	0.62*	0.88	1.25	1.53	1.98	2.34	2.80	675	1270
	632. 487	○	○	○	○**	CA	CC	-	-	1.50	0.60	0.80*	1.13	1.60	1.96	2.53	2.99	3.58	680	1275
	632. 517	○	○	○	○**	CA	CC	-	-	1.65	0.90	0.95*	1.34	1.90	2.33	3.00	3.56	4.25	685	1280
	632. 567	○	○	○	○**	CA	CC	-	-	2.00	0.90	1.25	1.77	2.50	3.06	3.95	4.68	5.59	690	1285
	632. 607	○	○	○	-	CA	CC	-	-	2.20	1.10	1.58	2.23	3.15	3.86	4.98	5.89	7.04	700	1300
	632. 647	○	○***	○	○**	-	CC	CE	-	2.50	1.30	2.00	2.83	4.00	4.90	6.33	7.48	8.94	700	1300
	632. 677	○	○***	○	○**	-	CC	CE	-	2.70	1.40	2.38	3.36	4.75	5.82	7.51	8.89	10.62	720	1330
	632. 727	○	○***	○	○**	-	CC	CE	-	3.00	1.60	3.15	4.46	6.30	7.72	9.96	11.79	14.09	740	1360
	632. 767	○	○	○	-	-	CC	CE	-	3.50	1.70	4.00	5.66	8.00	9.80	12.65	14.97	17.89	760	1400
	632. 807	○	○	○	-	-	CC	-	CG	4.00	2.00	5.00	7.07	10.00	12.25	15.81	18.71	22.36	790	1450
	632. 847	○	○	-	-	-	CC	-	CG	4.50	2.30	6.25	8.84	12.50	15.31	19.76	23.39	27.95	790	1450
	632. 887	○	○	○	-	-	-	-	CG	5.00	2.60	8.00	11.31	16.00	19.60	25.30	29.93	35.78	800	1460
	632. 927	○	○	○	-	-	-	-	CG	5.00	2.90	10.00	14.14	20.00	24.50	31.62	37.42	44.72	800	1460

1) We reserve the right to deliver 303 SS or 304 SS under the material no. 16.
 2) We reserve the right to deliver 316Ti SS or 316L SS under the material no. 17.
 A = Equivalent bore diameter · E = Narrowest free cross section
 *Differing spray pattern
 **Only available with code CC.
 ***Only available with code CG.
 Subject to technical modifications.

Example Type + Material-no. + Code = Ordering no.
for ordering: 632. 216. + 16 + CA = 632. 216. 16. CA



Flat fan nozzles for retaining nut Series 652



Assembly with retaining nut. Easy nozzle changing, simple jet alignment. Uniform, parabolic distribution of liquid. Spray pipes equipped with these nozzles show an extremely uniform total liquid distribution.

Applications:

Cleaning (e.g. surfaces, filters, belts), crate washers, lubricating, coating.



(Mat. no.
16 / 17 / 5E)




**303 SS/
316Ti SS/ Brass
(20°-75°)**



**303 SS/
316Ti SS/ Brass
(90°-120°)**



PVDF



**Weight Brass:
9 g**

Spray angle 	Ordering no.					A Ø [mm]	E Ø [mm]	V̇ [l/min]								Spray width B at p=2 bar 	
	Type	Mat. no.						p [bar]									
		16 303 SS	17 ¹ 316Ti SS/ 316L SS	30 Brass	5E PVDF			0.5	1.0	2.0	[US gal./ min] at 40 psi	3.0	5.0	10.0	H = 250 mm	H = 500 mm	
20°	652. 301	○	○	○	○	0.70	0.60	0.16*	0.23*	0.32	0.10	0.39	0.51	0.72	65	125	
	652. 361	○	○	○	○	1.00	0.80	0.31*	0.44*	0.63	0.20	0.77	1.00	1.40	65	125	
	652. 441	○	○	○	○	1.35	1.10	0.62*	0.88	1.25	0.39	1.53	1.98	2.80	65	125	
	652. 481	○	○	○	○	1.50	1.20	0.80*	1.13	1.60	0.50	1.96	2.53	3.58	65	125	
30°	652. 302	○	○	○	○	0.60	0.50	0.16*	0.23*	0.32	0.10	0.39	0.51	0.72	115	230	
	652. 362	○	○	○	○	1.00	0.70	0.31*	0.44*	0.63	0.20	0.77	1.00	1.40	115	230	
	652. 402	○	○	○	○	1.20	0.90	0.50*	0.71	1.00	0.31	1.23	1.58	2.24	115	230	
	652. 482	○	○	○	○	1.50	1.10	0.80*	1.13	1.60	0.50	1.96	2.53	3.58	115	230	
	652. 562	○	○	○	○	2.00	1.50	1.25	1.77	2.50	0.78	3.06	3.95	5.59	115	230	
	652. 642	○	○	○	-	2.50	1.80	2.00	2.83	4.00	1.24	4.90	6.33	8.94	120	230	
	652. 722	○	○	○	-	3.00	2.40	3.15	4.46	6.30	1.95	7.72	9.96	14.09	120	235	
	652. 762	○	○	○	-	3.50	2.70	4.00	5.66	8.00	2.48	9.80	12.65	17.89	120	235	
	652. 802	○	○	○	-	4.00	3.10	5.00	7.07	10.00	3.10	12.25	15.81	22.36	120	240	
45°	652. 303	○	○	○	-	0.70	0.50	0.16*	0.23*	0.32	0.10	0.39	0.51	0.72	180	340	
	652. 363	○	○	○	○	1.00	0.60	0.31*	0.44*	0.63	0.20	0.77	1.00	1.40	185	340	
	652. 403	○	○	○	○	1.20	0.90	0.50*	0.71	1.00	0.31	1.23	1.58	2.24	185	340	
	652. 483	○	○	○	○	1.50	1.10	0.80*	1.13	1.60	0.50	1.96	2.53	3.58	185	340	
	652. 563	○	○	○	○	2.00	1.40	1.25	1.77	2.50	0.78	3.06	3.95	5.59	185	340	
	652. 643	○	○	○	○	2.50	1.80	2.00	2.83	4.00	1.24	4.90	6.33	8.94	185	345	
	652. 723	○	○	○	-	3.00	2.40	3.15	4.46	6.30	1.95	7.72	9.96	14.09	190	355	
	652. 763	○	○	○	-	3.50	2.60	4.00	5.66	8.00	2.48	9.80	12.65	17.89	190	355	
	652. 803	○	○	○	-	4.00	3.00	5.00	7.07	10.00	3.10	12.25	15.81	22.36	195	360	
60°	652. 304	○	○	○	○	0.70	0.40	0.16*	0.23*	0.32	0.10	0.39	0.51	0.72	275	525	
	652. 334	○	○	○	○	0.90	0.50	0.22*	0.32*	0.45	0.14	0.55	0.71	1.01	275	525	
	652. 364	○	○	○	○	1.00	0.60	0.31*	0.44*	0.63	0.20	0.77	1.00	1.40	275	525	
	652. 404	○	○	○	○	1.20	0.80	0.50*	0.71	1.00	0.31	1.23	1.58	2.24	275	525	
	652. 444	○	○	○	○	1.35	0.90	0.62*	0.88	1.25	0.39	1.53	1.98	2.80	280	530	
	652. 484	○	○	○	○	1.50	1.00	0.80*	1.13	1.60	0.50	1.96	2.53	3.58	280	530	
	652. 514	○	○	○	○	1.65	1.10	0.95*	1.34	1.90	0.59	2.33	3.00	4.25	280	530	
	652. 564	○	○	○	○	2.00	1.30	1.25	1.77	2.50	0.78	3.06	3.95	5.59	280	525	
	652. 604	○	○	○	○	2.20	1.50	1.58	2.23	3.15	0.98	3.86	4.98	7.04	280	520	
	652. 644	○	○	○	○	2.50	1.60	2.00	2.83	4.00	1.24	4.90	6.33	8.94	275	520	
	652. 674	○	○	○	○	2.70	1.80	2.38	3.36	4.75	1.47	5.82	7.51	10.62	275	520	
	652. 724	○	○	○	○	3.00	2.10	3.15	4.46	6.30	1.95	7.72	9.96	14.09	275	520	
	652. 764	○	○	○	-	3.50	2.30	4.00	5.66	8.00	2.48	9.80	12.65	17.89	270	515	
	652. 804	○	○	○	○	4.00	2.60	5.00	7.07	10.00	3.10	12.25	15.81	22.36	270	510	
	652. 844	○	-	-	○	4.50	3.00	6.25	8.84	12.50	3.88	15.31	19.76	27.95	270	510	
	652. 884	○	-	○	-	5.00	3.40	8.00	11.31	16.00	4.96	19.60	25.30	35.78	270	505	

¹We reserve the right to deliver 316Ti SS or 316L SS under the material no. 17.

A = equivalent bore diameter · E = narrowest free cross section · *Differing spray pattern

Continued on next page.



Flat fan nozzles for retaining nut Series 652



Spray angle 	Ordering no.					A Ø [mm]	E Ø [mm]	V̇ [l/min]								Spray width B at p=2 bar  H = 250 mm H = 500 mm	
	Type	Mat. no.						p [bar]									
		16 303 SS	17 ¹ 316Ti SS/ 316L SS	30 Brass	5E PVDF												
75°	652. 145	○	-	○	-	0.20	0.12	-	0.04*	0.05	0.02	0.06	0.08	0.11	285	550	
	652. 165	○	-	○	-	0.20	0.14	-	0.05*	0.07	0.02	0.08	0.10	0.15	285	555	
	652. 185	○	-	○	-	0.20	0.16	-	0.06*	0.08	0.02	0.10	0.13	0.18	290	560	
	652. 215	○	-	○	-	0.40	0.20	-	0.08*	0.11	0.03	0.14	0.18	0.25	290	560	
	652. 245	○	-	○	-	0.50	0.30	-	0.12*	0.16	0.05	0.20	0.26	0.36	290	560	
	652. 275	○	-	○	-	0.60	0.30	0.11*	0.16*	0.22	0.07	0.27	0.35	0.49	290	560	
90°	652. 216	○	-	○	-	0.40	0.20	0.06*	0.08*	0.11	0.03	0.14	0.18	0.25	380	760	
	652. 246	○	-	○	-	0.50	0.30	0.08*	0.12*	0.16	0.05	0.20	0.26	0.36	380	760	
	652. 276	○	-	○	-	0.60	0.30	0.11*	0.16*	0.22	0.07	0.27	0.35	0.49	450	795	
	652. 306	○	○	○	○	0.70	0.40	0.16*	0.23*	0.32	0.10	0.39	0.51	0.72	450	795	
	652. 336	○	○	○	○	0.90	0.50	0.22*	0.32*	0.45	0.14	0.55	0.71	1.01	450	795	
	652. 366	○	○	○	○	1.00	0.50	0.31*	0.44*	0.63	0.20	0.77	1.00	1.41	450	795	
	652. 406	○	○	○	○	1.20	0.70	0.50*	0.71	1.00	0.31	1.23	1.58	2.24	450	800	
	652. 446	○	○	○	○	1.35	0.80	0.62*	0.88	1.25	0.39	1.53	1.98	2.80	450	800	
	652. 486	○	○	○	○	1.50	0.80	0.80*	1.13	1.60	0.50	1.96	2.53	3.58	450	800	
	652. 516	○	○	○	○	1.65	0.90	0.95*	1.34	1.90	0.59	2.33	3.00	4.25	450	800	
	652. 566	○	○	○	○	2.00	1.10	1.25	1.77	2.50	0.78	3.06	3.95	5.59	450	805	
	652. 606	○	○	○	○	2.20	1.20	1.58	2.23	3.15	0.98	3.86	4.98	7.04	450	805	
	652. 646	○	○	○	○	2.50	1.30	2.00	2.83	4.00	1.24	4.90	6.33	8.94	450	805	
	652. 676	○	○	○	○	2.70	1.40	2.38	3.36	4.75	1.47	5.82	7.51	10.62	450	810	
	652. 726	○	○	○	○	3.00	1.70	3.15	4.46	6.30	1.95	7.72	9.96	14.09	450	810	
	652. 766	○	○	○	-	3.50	1.90	4.00	5.66	8.00	2.48	9.80	12.65	17.89	450	815	
	652. 806	○	○	○	○	4.00	2.40	5.00	7.07	10.00	3.10	12.25	15.81	22.36	450	820	
	652. 846	-	-	○	○	4.50	2.40	6.25	8.84	12.50	3.88	15.31	19.76	27.95	450	820	
	652. 886	○	-	○	○	5.00	3.10	8.00	11.31	16.00	4.96	19.60	25.30	35.78	450	835	
120°	652. 187	○	-	○	-	0.35	0.20	-	0.06*	0.08	0.02	0.10	0.13	0.18	640	1220	
	652. 217	○	-	○	-	0.40	0.20	-	0.08*	0.11	0.03	0.14	0.18	0.25	650	1230	
	652. 247	○	-	○	-	0.50	0.20	-	0.12*	0.16	0.05	0.20	0.26	0.36	655	1245	
	652. 277	○	-	○	-	0.60	0.30	-	0.16*	0.22	0.07	0.27	0.35	0.49	655	1250	
	652. 307	○	-	○	○	0.70	0.30	0.16*	0.23*	0.32	0.10	0.39	0.51	0.72	660	1260	
	652. 337	○	○	○	○	0.90	0.40	0.22*	0.32*	0.45	0.14	0.55	0.71	1.01	660	1260	
	652. 367	○	○	○	○	1.00	0.50	0.31*	0.44*	0.63	0.20	0.77	1.00	1.41	660	1265	
	652. 407	○	○	○	○	1.20	0.60	0.50*	0.71	1.00	0.31	1.23	1.58	2.24	660	1270	
	652. 447	○	○	○	○	1.35	0.60	0.62*	0.88	1.25	0.39	1.53	1.98	2.80	665	1270	
	652. 487	○	○	○	○	1.50	0.60	0.80*	1.13	1.60	0.50	1.96	2.53	3.58	665	1270	
	652. 517	○	○	○	○	1.65	0.90	0.95*	1.34	1.90	0.59	2.33	3.00	4.25	670	1275	
	652. 567	○	○	○	○	2.00	0.90	1.25	1.77	2.50	0.78	3.06	3.95	5.59	670	1280	
	652. 607	○	○	○	○	2.20	1.10	1.58	2.23	3.15	0.98	3.86	4.98	7.04	675	1285	
	652. 647	○	○	○	-	2.50	1.30	2.00	2.83	4.00	1.24	4.90	6.33	8.94	680	1295	
	652. 677	○	○	○	-	2.70	1.40	2.38	3.36	4.75	1.47	5.82	7.51	10.62	685	1300	
	652. 727	○	○	○	○	3.00	1.60	3.15	4.46	6.30	1.95	7.72	9.96	14.09	695	1315	
	652. 767	○	○	○	-	3.50	1.70	4.00	5.66	8.00	2.48	9.80	12.65	17.89	705	1330	
	652. 807	○	-	○	-	4.00	2.00	5.00	7.07	10.00	3.10	12.25	15.81	22.36	705	1330	
	652. 847	-	-	-	○	4.50	2.30	6.25	8.84	12.50	3.88	15.31	19.76	27.95	800	1460	
	652. 887	-	-	-	○	5.00	2.60	8.00	11.31	16.00	4.96	19.60	25.30	35.78	800	1460	

¹We reserve the right to deliver 316Ti SS or 316L SS under the material no. 17.
A = equivalent bore diameter · E = narrowest free cross section · *Differing spray pattern
Subject to technical modifications.

Example of ordering: Type 652. 145 + Material no. 16 = Ordering no. = 652. 145. 16. CA

Conversion formula for the above series: $\dot{V}_2 = \dot{V}_1 \cdot \sqrt{\frac{p_2}{p_1}}$



Flat fan nozzles for belt lubrication

Series 652. xxx. 8H. 03



Especially low flow rates.
Parabolic liquid distribution.

Applications:

Belt lubrication, spraying of food products, oiling of metal sheets.

Operating pressure range:
1 to 5 bar

Recommended operating pressure:
3 bar

Viscosity:

The nozzles can be operated with viscous media, e. g. transmission fluid (max. approx. 200 mPas). However the spray angle decreases.

Return valve with filter:


- Prevents dripping and saves medium
- Size of filter mesh: 0.08 mm (200 mesh)

095.016.53.11.00

Opening pressure:
approx. 0.5 bar
Closing pressure:
approx. 0.3 bar

095.016.53.14.63

Opening pressure:
approx. 2.8 bar
Closing pressure:
approx. 1.6 bar

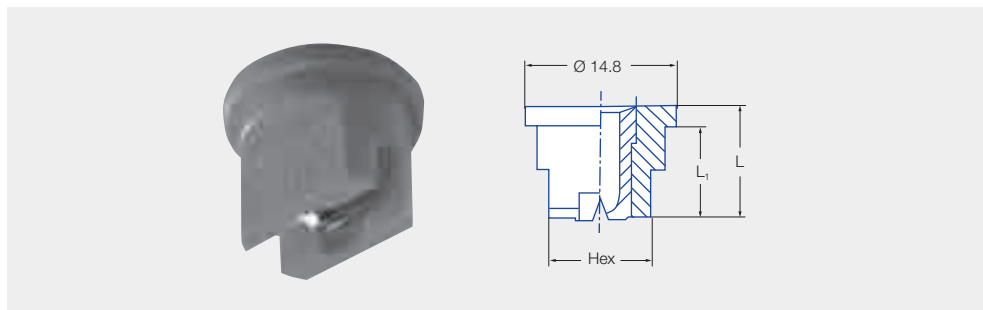

Spray angle	Ordering no.				Colour	E Ø [mm]	V̇ [l/min]			
	Type	Mat. no.					p [bar]			
		16	8H.03*	56.03						
		303 SS	POM/ 303 SS	POM			1.0	2.0	3.0	5.0
75°	652. 145	○	○	○	green	0.12	0.04**	0.05	0.06	0.08
	652. 165	○	○	-	black	0.14	0.05**	0.07	0.08	0.10
	652. 185	○	○	○	red	0.16	0.06**	0.08	0.10	0.13
	652. 215	○	○	-	blue	0.20	0.08**	0.11	0.14	0.18
	652. 245	○	○	-	orange	0.30	0.12**	0.16	0.20	0.26
	652.275	○	○	-	brown	0.30	0.16**	0.22	0.27	0.35
120°	652. 187	○	○	-	grey	0.20	0.06**	0.08	0.10	0.13
	652. 247	○	○	-	black	0.20	0.12**	0.16	0.20	0.26
	652. 277	○	○	-	black	0.30	0.16**	0.22	0.27	0.35

E = narrowest free cross section

* Housing POM, nozzle insert 303 SS

** Differing spray pattern.

Subject to technical modifications.


Pos.	Name	Ordering no.	Material	Colour	Dimensions [mm]			***
					L	L ₁	SW	
1	Filter with return valve	095. 016. 53. 11. 00	PP	blue	21	1.5	-	0.08
		095. 016. 53. 14. 63	PP	green	21	1.5	-	0.08
2	Gasket	065. 240. 55	PTFE	-	-	-	-	-
		065. 240. 72	EWP 210	-	-	-	-	-
3	Nozzle	Ordering no. see flow tables	303 SS	-	11	9	10	-
			POM/303 SS*	-	12	10	8	-
4	Cap nut	065. 200. 16	303 SS	-	13	10	22	-
		065. 200. 56	POM	black	14.5	11.5	22	-

* Housing POM, Nozzle insert 303 SS

** Size of mesh

Position 1

Filter with return valve




Position 2

Gasket



Position 3

Nozzle



Position 4

Cap nut





Tongue-type nozzles Series 686




Wide flat fan with a sharply delimited jet pattern. Particularly clog-proof.

Applications:

Foam control in storage tanks, crate washers, cleaning and washing processes requiring powerful and concentrated water jets.



(Mat. no.
16 / 5E)



Weight Brass: 18 g

Spray angle 	η	Ordering no.								B Ø [mm]	V̇ [l/min]			Dimensions								Spray width B at p=2 bar 
		Type	Mat. no.			Code G					p [bar]			L [mm]				Hex [mm]				H = 250 mm
			16 303 SS	30 Brass	5E PVDF	1/8 BSPT	1/4 BSPT	3/8 BSPT	1/2 BSPT		1.0	2.0	5.0	R 1/8	R 1/4	R 3/8	R 1/2	R 1/8	R 1/4	R 3/8	R 1/2	
90°	75°	686. 366	-	○	-	CA	-	-	-	0.80	0.45	0.63	1.00	22	-	-	-	11	-	-	-	520
	75°	686. 406	○	○	-	CA	-	-	-	1.00	0.71	1.00	1.58	23	-	-	-	11	-	-	-	525
	40°	686. 686	○	○	-	-	CC	-	-	2.40	3.54	5.00	7.91	-	29	-	-	-	14	-	-	530
	40°	686. 726	-	○	-	CA	-	-	-	2.70	4.45	6.30	9.96	26	-	-	-	11	-	-	-	530
	40°	686. 806	○	○	-	-	CC	-	-	3.40	7.07	10.00	15.81	-	34	-	-	-	14	-	-	530
	40°	686. 886	○	-	-	-	CC	-	-	4.20	11.31	16.00	25.30	-	36	-	-	-	17	-	-	530
	40°	686. 926	○	-	-	-	-	CE	-	4.70	14.14	20.00	31.62	-	-	39	-	-	-	17	-	530
140°	75°	686. 368	○	○	-	CA	-	-	-	0.80	0.45	0.63	1.00	23	-	-	-	11	-	-	-	1360
		686. 408	○	○	-	CA	-	-	-	1.00	0.71	1.00	1.58	23	-	-	-	11	-	-	-	1370
		686. 448	○	○	-	-	CC	-	-	1.20	0.88	1.25	1.98	-	28	-	-	-	14	-	-	1370
		686. 488	○	○	-	CA	CC	-	-	1.30	1.13	1.60	2.53	23	28	-	-	11	14	-	-	1370
		686. 528	○	○	-	CA	CC	-	-	1.50	1.41	2.00	3.16	23	28	-	-	11	14	-	-	1370
		686. 568	○	○	○*	CA	CC	-	-	1.70	1.77	2.50	3.59	23	28	-	-	11	14	-	-	1370
		686. 608	○	○	-	CA	CC	-	-	1.90	2.23	3.15	4.98	23	28	-	-	11	14	-	-	1370
		686. 648	○	○	-	-	CC	-	-	2.20	2.83	4.00	6.32	-	28	-	-	-	14	-	-	1370
		686. 688	○	○	-	CA	CC	-	-	2.40	3.54	5.00	7.91	23	28	-	-	11	14	-	-	1370
		686. 728	○	○	-	CA	CC	-	-	2.70	4.45	6.30	9.96	23	28	-	-	11	14	-	-	1370
		686. 768	○	○	-	-	CC	-	-	3.00	5.66	8.00	12.65	-	28	-	-	-	14	-	-	1370
		686. 808	○	○	-	CA	CC	-	-	3.40	7.07	10.00	15.81	23	28	-	-	11	14	-	-	1370
		686. 828	○	○	-	-	CC	-	-	3.60	7.92	11.20	17.71	-	28	-	-	-	14	-	-	1370
		686. 848	○	○	-	-	CC	-	-	3.80	8.80	12.50	19.76	-	28	-	-	-	14	-	-	1370
		686. 868	○	○	-	-	CC	-	-	4.00	9.90	14.00	22.14	-	28	-	-	-	14	-	-	1370
		686. 888	○	○	-	-	CC	-	-	4.20	11.31	16.00	25.30	-	28	-	-	-	14	-	-	1370
		686. 908	○	○	-	-	CC	-	-	4.50	12.73	18.00	28.46	-	28	-	-	-	14	-	-	1370
		686. 928	○	-	-	-	-	CE	-	4.70	14.14	20.00	31.62	-	-	32	-	-	-	17	-	1370
		686. 968	-	○	-	-	-	-	CG	5.30	17.68	25.00	39.53	-	-	32	40	-	-	17	22	1370
		686. 988	○	-	-	-	-	CE	CG	5.60	19.80	28.00	44.27	-	-	32	40	-	-	17	22	1370

B = Bore diameter

Can also be used for air or saturated steam.

*Only available with code CA

Example Type + Material no. + Code = Ordering no.
of ordering: 686. 366 + 30 + CA = 686.366. 30. CA

Conversion formula for the above series: $\dot{V}_2 = \dot{V}_1 \cdot \sqrt{\frac{p_2}{p_1}}$



Tongue-type nozzles for retaining nut

Series 684 / 688 / 689



Assembly with retaining nut. Wide flat fan with a sharply delimited spray pattern. Particularly clog-proof. Easy nozzle changing. Simple jet alignment.

Applications:


Foam control in storage tanks, crate washers, cleaning and washing processes requiring powerful and concentrated water jets.



(Mat. no. 16 / 5E)



Series 684



Weight: 3 g

Spray angle 	η	Ordering no.			Colour**	B Ø [mm]	$\dot{V}$ [l/min]			L [mm]	Spray width B at p=2 bar  H = 250 mm
		Type	Mat. no.				p [bar]				
			56	5E							
			POM	PVDF			1.0	2.0	5.0		
140°	75°	684. 348	○	-	green	0.7	0.35*	0.50	0.79	20	1360
	75°	684. 368	○	○	yellow	0.8	0.45*	0.63	1.00	20	1360
	75°	684. 408	○	-	blue	1.0	0.71	1.00	1.58	20	1370
	75°	684. 448	○	-	red	1.2	0.88	1.25	1.98	20	1370
	75°	684. 488	○	○	brown	1.3	1.13	1.60	2.53	20	1370
	75°	684. 528	○	-	grey	1.5	1.41	2.00	3.16	20	1370
	75°	684. 568	○	○	white	1.7	1.77	2.50	3.95	19	1370
	75°	684. 608	○	-	light blue	1.9	2.23	3.15	4.98	19	1370
	75°	684. 688	○	-	green	2.4	3.54	5.00	7.91	17	1370
	75°	684. 728	○	○	black	2.7	4.45	6.30	9.96	17	1370
75°	684. 808	○	-	purple	3.4	7.07	10.00	15.81	16	1370	

B = Bore diameter · * Differing spray pattern. · ** Material PVDF generally blue


Hard, sharp flat fan, narrowly delimited jet pattern. Not prone to clogging.

Applications:

Foam control in storage tanks, crate washers, cleaning and washing processes requiring powerful and concentrated water jets.




(Mat. no. 16 / 5E)



Series 688/689

Lock nut for type 689. 003
095.011.16.00.15
(303 SS)
095.011.5E.00.15
(PVDF)



Weight: 3 g

Spray angle 	η	Ordering no.					B Ø [mm]	$\dot{V}$ [l/min]				Dimensions		Weight	Spray width B at p=2 bar 	
		Type	Mat. no.		Code G			p [bar]				L [mm]	Hex [mm]		H = 250 mm	H = 500 mm
			16 303 SS	5E PVDF												
45°	35°	688. 763	○	-	CE	-	3.0	4.00	5.66	8.00	12.65	43	19	114 g	220	440
	30°	688. 843	○	-	CE	-	3.8	6.25	8.84	12.50	19.76	50	19	133 g	220	440
	29°	689. 923	○	-	CE	-	4.8	10.00	14.14	20.00	31.62	59	22	247 g	220	440
	35°	689. 003	○	○	-	90	6.0	15.75	22.27	31.50	49.81	80	32/24	306/33	250	490

B = Bore diameter




High pressure flat fan nozzles Series 602 / 608 / 652




Wide flat fan with a sharply delimited jet pattern. Particularly clog-proof.

Applications:


Foam control in storage tanks, crate washers, cleaning and washing processes requiring powerful and concentrated water jets.

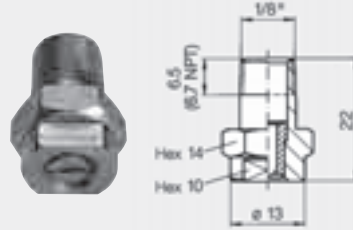

Series 608, Weight: 13 g

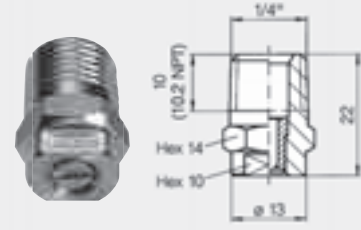

Series 602, Weight: 18 g

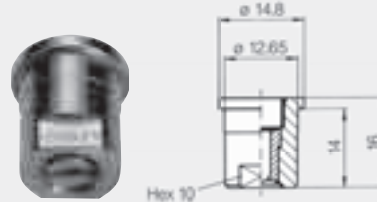

Series 652, Weight: 13 g

US gal/ min. at 40 psi	Nozzle-Code			Flow rate code				A Ø [mm]	V̇ [l/min]						
	Connection			 Spray angle					p [bar]						
1/8"	1/4"	nut	20°	30°	45°	60°		40	60	80	100	120	150	200	
02	608	602	652	361	362	363	364	1.00	2.86	3.50	4.04	4.52	4.95	5.53	6.39
025	608	602	652	381	382	383	384	1.10	3.54	4.33	5.00	5.59	6.12	6.85	7.91
03	608	602	652	401	402	403	404	1.18	4.31	5.28	6.10	6.82	7.47	8.35	9.64
034	608	602	652	411	412	413	414	1.30	4.95	6.06	7.00	7.83	8.57	9.59	11.07
04	608	602	652	451	452	453	454	1.35	5.80	7.10	8.20	9.17	10.04	11.23	12.97
045	608	602	652	471	472	473	474	1.40	6.51	7.97	9.20	10.29	11.27	12.60	14.55
05	608	602	652	481	482	483	484	1.55	7.29	8.92	10.30	11.52	12.62	14.11	16.29
055	608	602	652	501	502	503	504	1.60	7.96	9.74	11.25	12.58	13.78	15.41	17.79
06	608	602	652	521	522	523	524	1.72	8.70	10.66	12.31	13.76	15.07	16.85	19.46
065	608	602	652	531	532	533	534	1.75	9.38	11.49	13.26	14.83	16.25	18.16	20.97
07	608	602	652	541	542	543	544	1.80	10.06	12.32	14.22	15.90	17.42	19.47	22.49
075	608	602	652	551	552	553	554	1.90	10.75	13.16	15.20	16.99	18.62	20.81	24.04
08	608	602	652	571	572	573	574	2.05	11.48	14.06	16.23	18.15	19.88	22.23	25.67
09	608	602	652	591	592	593	594	2.10	13.01	15.93	18.40	20.57	22.53	25.19	29.09
10	608	602	652	601	602	603	604	2.30	14.43	17.76	20.40	22.81	24.99	27.94	32.26
125	-	602	652	641	642	643	644	2.50	17.82	21.82	25.20	28.17	30.86	34.51	39.85
15	-	602	652	671	672	673	674	2.70	21.35	26.15	30.20	33.76	36.98	41.35	47.74
175	-	602	652	701	702	703	704	3.00	25.03	30.66	35.40	39.58	43.36	48.47	55.97
20	-	602	652	-	-	723	724	3.05	28.85	35.33	40.80	45.62	49.97	55.87	64.52
30	-	602	652	-	-	793	-	3.90	42.43	51.96	60.00	67.08	73.48	82.16	94.88

A = Equivalent bore diameter

Connection Code	Connection	p _{max} * [bar]
A3. 00	BSPT	ca. 700
A3. 07	NPT	ca. 700
A3. 29	Lock nut	ca. 200

* Only valid for operation at constant pressure

Example for ordering: Nozzle code 602 + Flow rate code 361 + Connection code A3.00 = Ordering no. 602.361.A3.00
(Flat fan 20°; 4.52 l/min. at 100 bar; 1/4" NPT)

Conversion formula for the above series: $\dot{V}_2 = \dot{V}_1 \cdot \sqrt{\frac{p_2}{p_1}}$



Easy-Clip nozzle system



Quick and easy assembly with clamp. No tools required. Allround swivelling by 30°. Easy adjustment and cleaning.

Applications:

Degreasing, phosphating in surface treatment.

Materials:

Clamp: Stainless steel 301 SS
Sealing: EPDM
Cylinder pin, screw and screw unit: 316 SS.
Body, ball retainer cap: PP, reinforced.
Nozzle, ball joint: PP



Sets

existing of

- Nozzle
- Single clamp for 1 1/4" pipe
- Ball retainer cap

Ordering no.	Nozzle colour		V̇ [l/min]				
			p [bar]				
			0.5	1.0	1.5	2.0	2.5
676. 724. 53. 31	grey	60°	3.15	4.45	5.45	6.30	7.04
676. 764. 53. 31	brown	60°	4.00	5.66	6.93	8.00	8.94
676. 804. 53. 31	lilac	60°	5.00	7.07	8.66	10.00	11.18
676. 844. 53. 31	yellow	60°	6.25	8.84	10.83	12.50	13.98
676. 884. 53. 31	red	60°	8.00	11.31	13.85	16.00	17.89
676. 904. 53. 31	blue	60°	9.10	12.87	15.76	18.20	20.35
676. 924. 53. 31	green	60°	10.00	14.14	17.32	20.00	22.36

existing of



- Ball joint
- Single clamp for 1 1/4" pipe
- Ball retainer cap

Ordering no.	Ball colour	Nozzle connection	For nozzle series
092. 081. 53. AB	beige	1/8 BSPP	460, 490, 632, 686, 544
092. 081. 53. AD	beige	1/4 BSPP	422, 460, 490, 544, 632, 686
092. 081. 53. AF	beige	3/8 BSPP	422, 460, 490, 632, 686, 688
092. 081. 53. AH	beige	1/2 BSPP	422, 460, 490, 632, 686

Components

1 Nozzle

Ordering no.	Nozzle colour		V̇ [l/min]				
			p [bar]				
			0.5	1.0	1.5	2.0	2.5
676. 724. 53. 30. 01	grey	60°	3.15	4.45	5.45	6.30	7.04
676. 764. 53. 30. 01	brown	60°	4.00	5.66	6.93	8.00	8.94
676. 804. 53. 30. 01	lilac	60°	5.00	7.07	8.66	10.00	11.18
676. 844. 53. 30. 01	yellow	60°	6.25	8.84	10.83	12.50	13.98
676. 884. 53. 30. 01	red	60°	8.00	11.31	13.85	16.00	17.89
676. 904. 53. 30. 01	blue	60°	9.10	12.87	15.67	18.20	20.35
676. 924. 53. 30. 01	green	60°	10.00	14.14	17.32	20.00	22.36
092. 080. 53. 00. 01	grey		Blind nozzle				

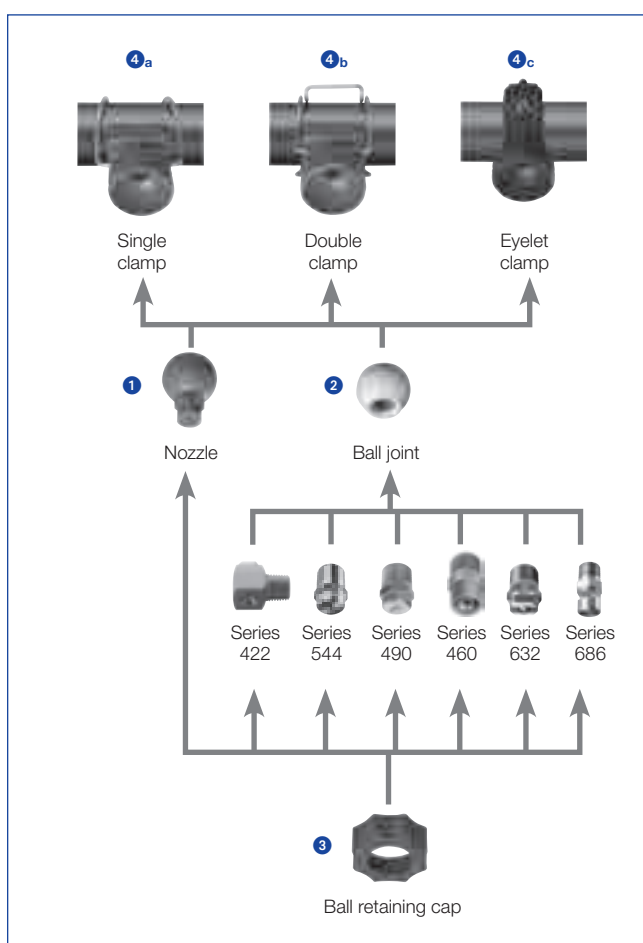




Easy-Clip nozzle system



2 Ball joint

Ordering no.	Colour	Nozzle connection	L [mm]	For nozzle series
092. 080. 53. AB. 01	beige	1/8 BSPP	28.4	460, 490, 544, 632, 686
092. 080. 53. AD. 01	beige	1/4 BSPP	32.4	422, 460, 490, 544, 632, 686
092. 080. 53. AF. 01	beige	3/8 BSPP	31.4	422, 460, 490, 632, 686, 688
092. 080. 53. AH. 01	beige	1/2 BSPP	33.0	422, 460, 490, 632, 686

2




Ball joint

3 Ball retainer cap

Ordering no.
092. 080. 53. 00. 02

3




Ball retainer cap

4a Single clamp

Ordering no.	Spigot-Ø Br	Recommended bore-Ø	For Pipe-Ø
092. 080. 53. 00	16.3 mm	16.5-17.0 mm	1" (32.0-34.5 mm)
092. 081. 53. 00	16.3 mm	16.5-17.0 mm	1 1/4" (40.0-43.0 mm)
092. 082. 53. 00	16.3 mm	16.5-17.0 mm	1 1/2" (46.0-49.0 mm)
092. 083. 53. 00	16.3 mm	16.5-17.0 mm	2" (58.0-62.0 mm)

Other spigot-Ø (13.8/18.5 mm) on request.

4a




Single clamp

4b Double clamp

Ordering no.	Spigot-Ø Br	Recommended bore-Ø	For Pipe-Ø
092. 090. 53. 00	16.3 mm	16.5-17.0 mm	1" (32.0-34.5 mm)
092. 091. 53. 00	16.3 mm	16.5-17.0 mm	1 1/4" (40.0-43.0 mm)
092. 092. 53. 00	16.3 mm	16.5-17.0 mm	1 1/2" (46.0-49.0 mm)
092. 093. 53. 00	16.3 mm	16.5-17.0 mm	2" (58.0-62.0 mm)

Other spigot-Ø (13.8/18.5 mm) on request.

4b




Double clamp

4c Eyelet clamp

Ordering no.	Spigot-Ø Br	Recommended bore-Ø	For Pipe-Ø
090. 023. 53. 43. 10	16 mm	16.5-17.0 mm	1" (32.0-34.5 mm)
090. 033. 53. 43. 10	16 mm	16.5-17.0 mm	1 1/4" (40.0-43.0 mm)
090. 043. 53. 43. 10	16 mm	16.5-17.0 mm	1 1/2" (46.0-49.0 mm)

Other bore diameter (13.8/20.0 mm) on request.

4c



Eyelet clamp 1 1/4"

Conversion formula for the above series: $\dot{V}_2 = \dot{V}_1 \cdot \sqrt{\frac{p_2}{p_1}}$



Flat fan nozzles with ball joint Series 676




Swivelling nozzle for precise adjusting of jet direction. No gaskets necessary. Long, unproblematic service life.

Applications:

Cleaning (e.g. surfaces, filters, belts), crate washers, lubricating, coating.



(Mat. no.
16 / 17)



Allround swivelling by 30°
Weight brass: 45 g

Spray angle	Ordering no.		A Ø [mm]	E Ø [mm]	V̇ [l/min]						Spray width B at p=2 bar	
	Type	Mat. no.			p [bar] (p _{max} = 30 bar)						H = 250 mm	H = 500 mm
		16 303 SS Brass			0.5	1.0	2.0	3.0	5.0	10.0		
45°	676. 303	○ ○	0.70	0.50	0.16*	0.23*	0.32	0.39	0.51	0.72	150	270
	676. 363	○ ○	1.00	0.60	0.31*	0.44*	0.63	0.77	1.00	1.40	155	280
	676. 403	○ ○	1.20	0.90	0.50*	0.71	1.00	1.23	1.58	2.24	175	320
	676. 483	○ ○	1.50	1.10	0.80	1.13	1.60	1.96	2.53	3.58	180	340
	676. 563	○ ○	2.00	1.40	1.25	1.77	2.50	3.06	3.95	5.59	185	355
	676. 643	○ ○	2.50	1.80	2.00	2.83	4.00	4.90	6.33	8.94	195	370
	676. 723	○ ○	3.00	2.40	3.15	4.46	6.30	7.72	9.96	14.09	200	375
	676. 763	○ ○	3.50	2.60	4.00	5.66	8.00	9.80	12.65	17.89	200	380
60°	676. 803	○ ○	4.00	3.00	5.00	7.07	10.00	12.25	15.81	22.36	205	385
	676. 304	○ ○	0.70	0.40	0.16*	0.23*	0.32	0.39	0.51	0.72	215	425
	676. 334	○ ○	0.90	0.50	0.22*	0.32*	0.45	0.55	0.71	1.01	220	440
	676. 364	○ ○	1.00	0.60	0.31*	0.44*	0.63	0.77	1.00	1.40	230	460
	676. 404	○ ○	1.20	0.80	0.50*	0.71	1.00	1.23	1.58	2.24	245	485
	676. 444	○ ○	1.35	0.90	0.62*	0.88	1.25	1.53	1.98	2.80	255	495
	676. 484	○ ○	1.50	1.00	0.80*	1.13	1.60	1.96	2.53	3.58	260	510
	676. 514	○ ○	1.65	1.10	0.95*	1.34	1.90	2.33	3.00	4.25	270	520
	676. 564	○ ○	2.00	1.30	1.25	1.77	2.50	3.06	3.95	5.59	280	535
	676. 604	○ ○	2.20	1.50	1.58	2.23	3.15	3.86	4.98	7.04	290	550
	676. 644	○ ○	2.50	1.60	2.00	2.83	4.00	4.90	6.33	8.94	295	565
	676. 674	○ ○	2.70	1.80	2.38	3.36	4.75	5.82	7.51	10.62	300	575
90°	676. 724	○ ○	3.00	2.10	3.15	4.46	6.30	7.72	9.96	14.09	305	590
	676. 764	○ ○	3.50	2.30	4.00	5.66	8.00	9.80	12.65	17.89	310	595
	676. 216	○ ○	0.40	0.20	-	0.08*	0.11	0.14	0.18	0.25	370	700
	676. 276	○ ○	0.60	0.30	0.11*	0.16*	0.22	0.27	0.35	0.49	375	720
	676. 306	○ ○	0.70	0.40	0.16*	0.23*	0.32	0.39	0.51	0.72	380	740
	676. 336	○ ○	0.90	0.50	0.22*	0.32*	0.45	0.55	0.71	1.01	415	800
	676. 366	○ ○	1.00	0.50	0.31*	0.44*	0.63	0.77	1.00	1.40	420	810
	676. 406	○ ○	1.20	0.70	0.50*	0.71	1.00	1.23	1.58	2.24	430	820
	676. 446	○ ○	1.35	0.80	0.62*	0.88	1.25	1.53	1.98	2.80	435	830
	676. 486	○ ○	1.50	0.80	0.80*	1.13	1.60	1.96	2.53	3.58	440	835
	676. 516	○ ○	1.65	0.90	0.95*	1.34	1.90	2.33	3.00	4.25	440	840
	676. 566	○ ○	2.00	1.10	1.25	1.77	2.50	3.06	3.95	5.59	445	850
	676. 606	○ ○	2.20	1.20	1.58	2.23	3.15	3.86	4.98	7.04	450	860
	676. 646	○ ○	2.50	1.30	2.00	2.83	4.00	4.90	6.33	8.94	455	865
	676. 676	○ ○	2.70	1.40	2.38	3.36	4.75	5.82	7.51	10.62	465	875
	676. 726	○ ○	3.00	1.70	3.15	4.46	6.30	7.72	9.96	14.09	470	885

A = Equivalent bore diameter · E = narrowest free cross section
* Differing spray pattern

Continued on next page.



Flat fan nozzles with ball joint Series 676



Spray angle 	Ordering no.			A Ø [mm]	E Ø [mm]	V̇ [l/min]						Spray width B at p=2 bar	
	Type	Mat. no.				p [bar] (p _{max} = 30 bar)							
		16	30										
		303 SS	Brass			0.5	1.0	2.0	3.0	5.0	10.0	H = 250 mm	H = 500 mm
120°	676. 187	○	○	0,35	0,20	-	0,06*	0,08	0,10	0,13	0,18	630	1200
	676. 217	○	○	0,40	0,20	-	0,08*	0,11	0,14	0,18	0,25	640	1210
	676. 247	○	○	0,50	0,20	-	0,12*	0,16	0,20	0,26	0,36	650	1230
	676. 277	○	○	0,60	0,30	-	0,16*	0,22	0,27	0,35	0,49	660	1250
	676. 307	○	○	0,70	0,30	0,16*	0,23*	0,32	0,39	0,51	0,72	660	1250
	676. 337	○	○	0,90	0,40	0,22*	0,32*	0,45	0,55	0,71	1,01	670	1270
	676. 367	○	○	1,00	0,50	0,31*	0,44*	0,63	0,77	1,00	1,40	670	1270
	676. 407	○	○	1,20	0,60	0,50*	0,71	1,00	1,23	1,58	2,24	670	1270
	676. 447	○	○	1,35	0,60	0,62*	0,88	1,25	1,53	1,98	2,80	675	1270
	676. 487	○	○	1,50	0,60	0,80*	1,13	1,60	1,96	2,53	3,58	680	1275
	676. 517	○	○	1,65	0,90	0,95*	1,34	1,90	2,33	3,00	4,25	685	1280
	676. 567	○	○	2,00	0,90	1,25	1,77	2,50	3,06	3,95	5,59	690	1285
	676. 607	○	○	2,20	1,10	1,58	2,23	3,15	3,86	4,98	7,04	700	1300
	676. 647	○	○	2,50	1,30	2,00	2,83	4,00	4,90	6,33	8,94	700	1300
	676. 677	○	○	2,70	1,40	2,38	3,36	4,75	5,82	7,51	10,62	720	1330
	676. 727	○	○	3,00	1,60	3,15	4,46	6,30	7,72	9,96	14,09	740	1360
676. 767	○	○	3,50	1,70	4,00	5,66	8,00	9,80	12,65	17,89	760	1400	

A = Equivalent bore diameter · E = narrowest free cross section

* Differing spray pattern

Example Type + Material-no. = Ordering no.
for ordering: 676. 145 + 16 = 676. 145. 16

Accessories

Retaining nut
092. 020. 16. 00. 02
Material: 303 SS
092. 020. 30. 00. 02
Material: Brass







Socket
092. 020. 16. AF. 03
Material: 303 SS
092. 020. 30. AF. 03
Material: Brass



Retaining nipple
092. 024. 16. AC. 03
Material: 303 SS
092. 024. 30. AC. 03
Material: Brass



Welding nipple
092. 020. 17. 00. 04
Material: 316Ti SS

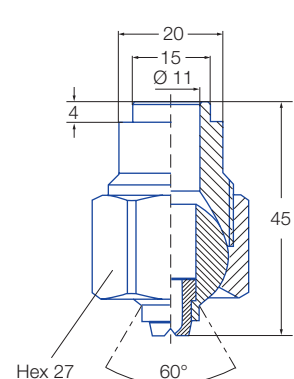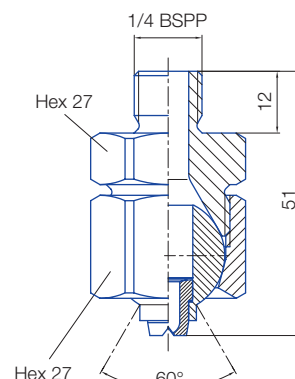

Conversion formula for the above series: $\dot{V}_2 = \dot{V}_1 \cdot \sqrt{\frac{p_2}{p_1}}$



Nozzles and accessories in Hygienic Design








Features:

The hygienically designed nozzles and accessories are characterized by their very good surface finish (RA < 0.8 µm). This minimises the tendency for soiling and provides good cleanability. The nozzles and accessories are available in 316L SS or 316Ti SS and the seals are made of FDA approved EPDM.

Applications:

Aseptic filling, suitable for high hygienic demands.







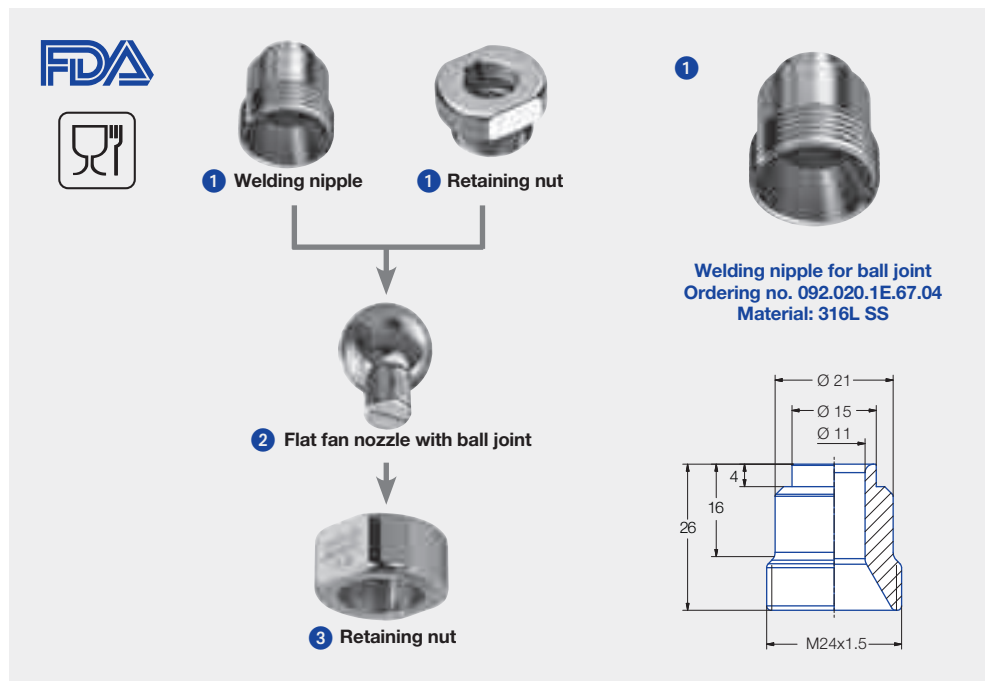


Spray angle	Ordering no.	ṽ [l/min] at 2 bar
20°	676.641.17.67	4.00
30°	676.402.17.67	1.00
	676.562.17.67	2.50
	676.722.17.67	6.30
	676.802.17.67	10.00
45°	676.763.17.67	8.00
	676.883.17.67	16.00
60°	676.514.17.67	1.90
	676.764.17.67	8.00
90°	676.366.17.67	0.60
	676.646.17.67	4.00
120°	676.647.17.67	4.00
	676.767.17.67	8.00

Spray angle	Ordering no.	ṽ [l/min] at 2 bar
140°	6ZK.648.1E.67	4.00



Nozzles and accessories in Hygienic Design

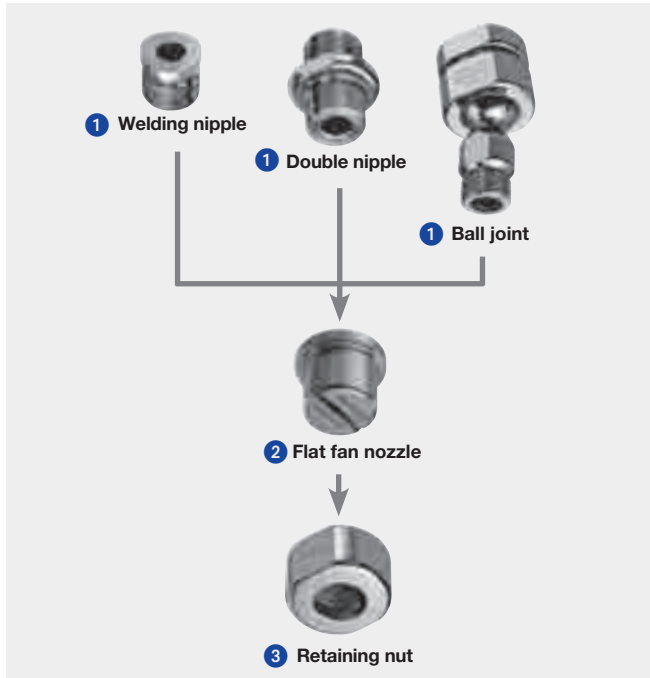

Ordering no.	Radius [mm]
065.210.1E.67.00	no radius
065.217.1E.67.10	10
065.217.1E.67.13	12.5
065.217.1E.67.16	16
065.217.1E.67.20	20
065.217.1E.67.31	31

Spray angle	Ordering no.	$\dot{V}$ [l/min] at 2 bar
60°	652.604.1E.67	3.10
	652.924.1E.67	20.00

Spray angle	Ordering no.	$\dot{V}$ [l/min] at 2 bar
60°	652.484.17.87	1.60
	652.514.17.87	1.90
	652.544.17.87	2.20
	652.564.17.87	2.50
	652.604.17.87	3.10
	652.644.17.87	4.00
	652.674.17.87	4.70
	652.724.17.87	6.30
	652.764.17.87	8.00

Conversion formula for the above series: $\dot{V}_2 = \dot{V}_1 \cdot \sqrt{\frac{p_2}{p_1}}$



High-pressure solid stream nozzles

Series 546 / 548 / 550



Punctiform, extremely tight, non-dispersing solid stream. Highest impact.

Applications:

High-pressure cleaning, cutting and separating.


Materials:

Nozzle body:


Stainless steel 303 SS

Insert:


Hardened steel 1.4034 S



Series 550, weight: 13 g



Series 546, weight: 18 g



Series 548, weight: 13 g

US gal/min. at 40 psi	Nozzle-Code			Flow rate code	B Ø [mm]	ṽ [l/min]						
	Connection					p [bar]						
	1/8"	1/4"	Retaining nut			40	60	80	100	150	200	300
02	550	546	548	360	0.84	2.86	3.50	4.04	4.52	5.54	6.39	7.83
03	550	546	548	400	1.03	4.31	5.28	6.10	6.82	8.35	9.64	11.81
034	550	546	548	410	1.07	4.70	5.80	6.70	7.49	9.17	10.59	12.97
035	550	546	548	420	1.11	5.06	6.20	7.16	8.00	9.80	11.32	13.86
04	550	546	548	450	1.19	5.80	7.10	8.20	9.17	11.23	12.97	15.88
045	550	546	548	470	1.26	6.54	8.00	9.25	10.34	12.66	14.62	17.91
05	550	546	548	480	1.33	7.29	8.92	10.30	11.52	14.11	16.29	19.95
055	550	546	548	500	1.39	7.96	9.75	11.26	12.59	15.42	17.80	21.81
06	550	546	548	520	1.46	8.70	10.66	12.31	13.76	16.85	19.46	23.83
08	550	546	548	570	1.69	11.48	14.06	16.23	18.15	22.23	25.67	31.44
10	550	546	548	600	1.88	14.32	17.54	20.25	22.64	27.73	32.02	39.21
15	550	546	548	670	2.30	21.60	26.46	30.55	34.16	41.84	48.31	59.17
20	550	546	548	720	2.66	28.85	35.34	40.80	45.62	55.87	64.52	79.02

A = Equivalent bore diameter

Connection Code	Connection	p _{max} * [bar]
A3. 00	BSPT	ca. 700
A3. 07	NPT	ca. 700
A3. 29	Lock nut	ca. 200

* Only valid for operation at constant pressure

Example	Nozzle Code	+	Flow rate code	+	Connection code	=	Ordering no.
for ordering:	550	+	360	+	A3. 07	=	550. 360. A3. 07
							(Solid stream; 4.52 l/min. at 100 bar; 1/8" NPT)



Multi-channel flat fan nozzles for air **Whisperblast®**, Plastic versions Series 600.130 / 600.484

**Particularly
silent!**

**Highly efficient air stream,
acting upon areas.
Reduced noise levels.
Low air consumption.**

Applications:

Blowing off and blowing out,
cleaning, drying, cooling,
sorting with air.




(Mat. no.
16 / 5E)




* Complies with
OSHA require-
ments on noise
level




600.130 (POM or PP)




**Weight: 23 g · Tmax POM: 50 °C
Weight: 15 g · Tmax PP: 60 °C**



600.484.56 (POM)




Weight: 16 g · Tmax: 50 °C



600.130.56.01 with accessories
*01 = 1.0711 / 17 = 316Ti SS/30 = Brass

**Item 600.130.56.01 does not
meet FDA/(EC) No. 1935/2004
requirements.**

Technical Data

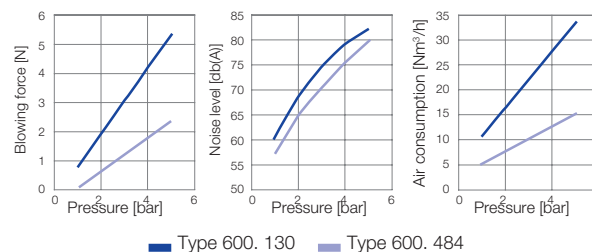

1/4 BSPP



M 12 x 1.25

**Socket
Ordering no.
095.016.30.14.23.0**

Material: Brass

For connection of series
600.130 with compressed air
guns.



Ball joints see page 76

Type	Ordering no.					
	Mat. no.		Code			
	S2 PP	56 POM	1/4 BSPP	1/4 NPT	M12 x 1.25	Quick connect coupling NW 5
600.130	○	○	AC	BC	-	-
600.130 with cover strip		○	02	-	-	-
600.130 with cover strip, Hose barb (D = 8 mm) and Extension tube (L = 85 mm)		○	01	-	-	-
600.484		○	AC	BC	HG	00

**Example
of ordering:** Type + Mat. no. + Code = Ordering no.
600.130. + 56 + AC = 600.130.56.AC



Multi-channel flat fan nozzles for air **Whisperblast®**, metallic versions Series 600.283 / 600.493 / 600.562

**Particularly
silent!**

**Metalic versions for
higher temperatures.
Highly efficient air stream,
acting upon areas.
Reduced noise levels.
Low air consumption.**

Applications:

Blowing off and blowing out,
cleaning, drying, cooling,
conveying with air.



**Socket
Ordering no.
095.016.30.14.23.0**

Material: Brass

For connection with
compressed air guns for
the following series:

- 600.283
- 600.493

**For more information please
ask for our special brochure
»Nozzles and Accessories for Compressed
Air«.**



Complies with
OSHA requirements
on noise level only

(Mat. no. 1Y)

Complies with
OSHA requirements

600.283.42 (Aluminum)

Weight: 60 g · Tmax: 200 °C



600.493.1Y (Stainless steel 316L SS)

Weight: 126 g · Tmax: 550 °C

600.562.1Y.10 (Stainless steel 316L SS)

Weight: 17 g · Tmax: 180 °C

Technical data

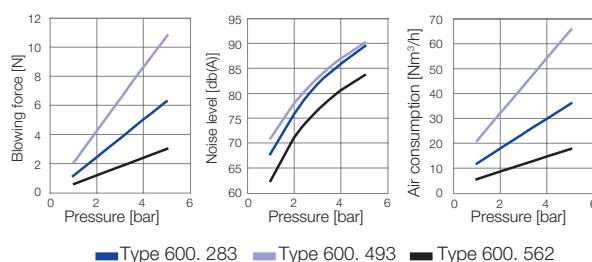

Ball joints see page 76

Type	Ordering no.				
	Mat. no.		Code		
	42	1Y	1/8 BSPP	1/4 BSPP	1/4 NPT
600.283	○	-	-	AC	BC
600.493	-	○	-	AC	BC
600.562.1Y.10	-	○	○	-	-

Example of ordering: Type 600.283. + Mat. no. 42. + Code AC = Ordering no. 600.283.42.AC



Multi-channel round jet nozzles for air Series 600. 326 / 600.388

**Particularly
silent!**

**Powerful air jet, producing
punctiform impact
patterns. Low noise level.
Low air consumption.**

Applications:

Targeted blowing out and
blowing off with compressed
air guns.


**Reduction of noise level
of up to 12 dB (A).**



OSHA®




600.326.5K (ABS)



Tmax: 50 °C




600.326.3W (Zinc)



Tmax: 90 °C



600.388.30 (Brass, POM)



Tmax: 50 °C


**Mini-round jet nozzle.
Compact design.**

Applications:

Especially for blowing out
pocket holes.



Technical data

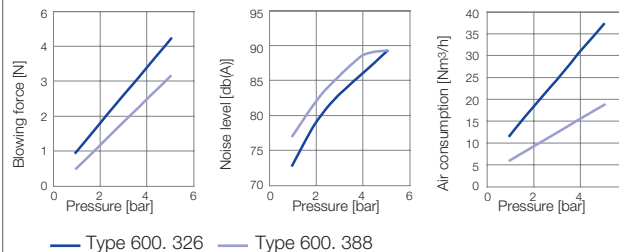

Ball joints see page 76

Ordering no.		Connection thread G	Weight
Type	Code		
600.326.5K (Material: ABS)	AC HG	1/4 BSPP M 12 x 1.25	9 g
600.326.3W (Material: Zinc)	AC HG	1/4 BSPP M 12 x 1.25	47 g
600.388.30 (Material: Brass/POM)	AA HG	1/8 BSPP M 12 x 1.25	12 g

Example of ordering:	Type 600.326.5K	+	Code AC	=	Ordering no. 600.326.5K.AC
-------------------------	--------------------	---	------------	---	-------------------------------



Accessories

Eyelet clamps / Retaining nuts




(Mat. no. 16 / 17 / 5E)



For Series	Ordering no.				Screw	Dimensions [mm]										Weight (Polyamid)
	Type	Material no.				BSPP	Pipe Ø	D Ø	B _R *	B ^{**} Ø	B ₁	B ₂	B ₃	H ₁	H ₂	
		51	53	5E												
		Polyamid	Polypropylene	PVDF												
2TR / 216 / 302 / 308 / 350 468/ 548/ 679 / 684 / 652	090.053	○	○	○	Material 303 SS	3/8	3/8"	16.5-18.0	6.0	6.2-6.4	19.0	22.0	18.5	34.5	14.5	20 g
	090.003	○	○	○		3/8	1/2"	20-22.0	6.0	6.2-6.4	21.2	23.8	18.5	36.5	16.5	20 g
	090.013	○	○	○		3/8	3/4"	25-27.5	7.6	7.8-8.0	24.5	26.5	22.0	39.5	17.5	25 g
	090.023	○	○	○		3/8	1"	32-34.5	10.6	10.8-11.0	30.0	31.0	22.0	44.0	21.0	32 g
	090.033	○	○	○		3/8	1 1/4"	40-43.0	12.6	12.8-13.0	34.0	35.5	25.0	48.0	25.0	38 g

*BR Ø = Spigot diameter

**B Ø = Recommended bore diameter

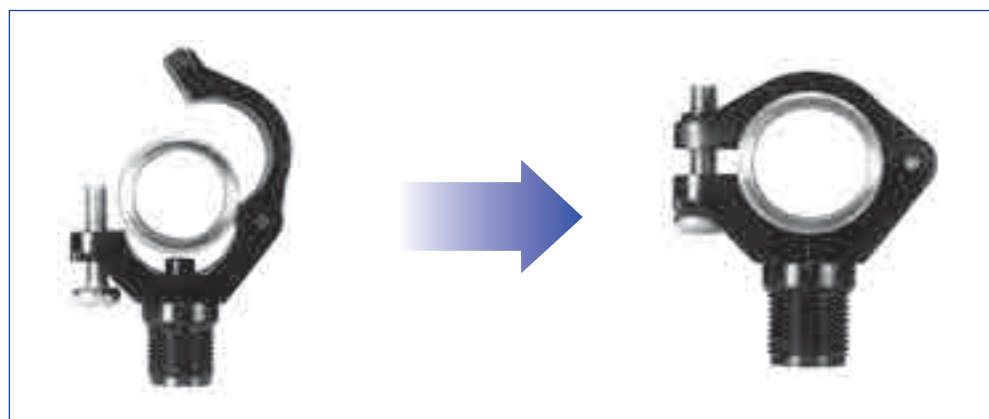

For Series	Ordering no.							Dimensions [mm]					Weight (Brass)
	Type	Material no.											
		16	17 ¹	1Y	30	56	5E	BSPP	H ₁	H ₂	D Ø	Hex	
2TR/468/ 548/652/660/ 679/684	065.200	○	○	-	○	-	-	3/8	13.0	10.0	12.8	22	25 g
	065.200	-	-	-	-	○	○	3/8	14.5	11.5	12.8	22	25 g
	069.000	○	-	○	○	-	-	UNF 11/16-16	14.3	8.7	13.1	21	25 g
656/657 664/665	065.600	○	○	-	○	-	○	3/4	16.0	13.0	20.1	32	60 g

¹ We reserve the right to deliver 316Ti SS or 316L SS under the material no. 17.

Example Type + Material no. = Ordering no.
for ordering: 090. 053 + 51 = 090. 053. 51







Accessories

Sockets / Nipples



(Mat. no. 1Y / 17)



For Series	Ordering no.						Dimensions [mm]							Weight (Brass)
	Type	Material no.					G ₁	G ₂	H ₁	H ₂	D ₁	D ₂	Hex	
		02	1Y	17	30	53								
		Steel	316L SS	316Ti SS	Brass	Polypropylene								
For all nozzles with 1/8" male thread.	040.270	-	○	-	○	-	-	1/8 BSPP	20	10	13.8	-	14	20 g
For all nozzles with 1/4" male thread.	061.220	-	○	-	○	-	-	1/4 BSPP	20	10	16.8	-	17	25 g
For all nozzles with 3/8" male thread.	040.271	-	-	○	○	-	-	3/8 BSPP	20	10	21.5	-	22	25 g
	040.271	-	-	○	○	○		3/8 BSPP	20	10	24.5	-	22	25 g
For all nozzles with 1/4" male thread.	040.228.xx.yy*	-	○	-	-	-	-	1/4 BSPP	18	2	17	-	-	16 g
2TR/216/302 308/350/548/ 468/679 /684/652	065.210	○	-	○	○	○	3/8 BSPP	-	18	10	17.2	11.5	-	20 g
306/307 502/503 656/657	065.610	○	-	○	-	○	3/4 BSPP	-	27	14	28	18	-	61 g
2TR/216/302/308/350 548/468/679/684/652	065.217.xx.yy*	-	-	○	-	-	3/8 BSPP	-	15	10	17.2	11.5	-	20 g
216/302/308 350/548/468 679/684/652	065.215 ¹	-	-	○	○	-	3/8 BSPP	1/4 BSPP	25	10	10	7	22	30 g
	065.211	-	-	○	○	-	3/8 BSPP	3/8 BSPP	25	10	11.5	-	22	25 g
	065.611	-	-	○	○	-	3/4 BSPP	3/4 BSPP	35	14	18	-	32	90 g

* Replace **xx** by material no. and **yy** by radius R

¹ Not to be used with non-return valve or filter.

Example **Type** + **Material no.** = **Ordering no.**
for ordering: 040. 270 + 1Y = 040. 270. 1Y




Accessories Ball joints




(Mat. no. 16)


Allround swivelling action of 30°.
No sealings, no wear.
Long service life even after many adjustments.
 P_{max} : 25 bar.




Ball joint with thread connection, female-female



Ball joint with welding connection




Ball joint with thread connection, female-male

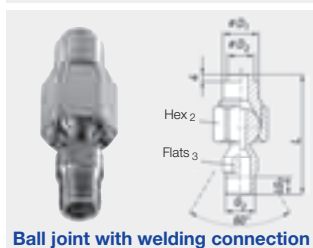

Ball joint with welding connection

For Series	Ordering no.					Dimensions [mm]											Weight (Brass)
	Type	Material no.			Code	D ₁	D ₂	G ₁ BSPP	G ₂ BSPP	L _{G1}	L _{G2}	L	Hex ₁	Hex ₂	Hex ₃		
		303 SS/ 316Ti SS	303 SS	30 Brass													
For all nozzles with 1/4" male thread.	092.020	-	○	○	AD	-	-	1/4	1/4	12.0	11.5	60.3	27	27	17	60 g	
	092.021	-	○	○	AF	-	-	3/8	1/4	12.0	11.5	58.3	27	27	17	80 g	
For all nozzles with 3/8" male thread.	092.030	-	○	○	AF	-	-	3/8	3/8	12.0	12.0	56.7	27	30	19	80 g	
For all nozzles with 1/4" male thread.	092.020	○	-	-	SD	20.0	15.0	-	1/4	-	11.5	64.3	-	27	17	60 g	
For all nozzles with 3/8" male thread.	092.030	○	-	-	SF	22.0	15.0	-	3/8	-	12.0	58.7	-	30	19	80 g	
2TR/216/302/308/350 548/468/679/684/652	092.022	-	○	○	AD	-	-	1/4	3/8	12.0	10.0	63.8	27	27	17	80 g	
	092.022	-	○	○	AF	-	-	3/8	3/8	12.0	10.0	61.8	27	27	17	85 g	
2TR/216/302/308/350 548/468/679/684/652	092.022	○	-	-	SE	20.0	15.0	-	3/8	-	10.0	67.8	-	27	17	80 g	

Compact ball joints for narrow installation conditions



Ball joint with thread connection




For all nozzles with 1/8" male thread	092.010	-	○	○	AA	-	-	1/8	1/8	8.0	8.0	29.3	22	24	-	70 g
For all nozzles with 1/4" male thread	092.024	-	○	○	AC	-	-	1/4	1/4	12.0	12.0	44	27	27	-	140 g
For all nozzles with 3/8" male thread	092.030	-	○	○	AE	-	-	3/8	3/8	12.0	12.0	44	27	30	-	160 g





Accessories

Non-return valves / filters



For nozzle size	Ordering no.				Colour	Opening pressure [bar]	Closing pressure [bar]	Mesh size [mm]	Dimensions [mm]				Weight
	Type	Material no.							H ₁	H ₂	D ₁	D ₂	
		56 POM	53 Polypropylen	26 Monel/ Copper									
xxx.32x-xxx.44x	065.265 Ball 420 SS Spring 301 SS	○	-	-	blue	0.5–1.0	0.4–0.9	0.25	21.5	2.0	14.8	11.0	2 g
xxx.48x-xxx.56x	065.266 Ball 420 SS Spring 301 SS	○	-	-	red	0.4-0.5	0.35-0.45	0.65	21.5	2.0	14.8	11.0	2 g
xxx.14x-xxx.36x	095.016.53.11.00 Ball 304 SS Spring 301 SS	-	○	-	blue	approx. 0.5	approx. 0.3	0.08	21.0	1.6	15.0	11.0	2 g
xxx.14x-xxx.36x	095.016.53.14.63 Ball 304 SS Spring 301 SS	-	○	-	green	approx. 2.8	approx. 1.6	0.08	21.0	1.6	15.0	11.0	2 g
xxx.32x-xxx.44x	065.257	○	-	-	blue	-	-	0.25	21.5	2.0	14.8	11.0	2 g
xxx.48x-xxx.56x	065.256	○	-	-	red	-	-	0.65	21.5	2.0	14.8	11.0	2 g
xxx.14x-xxx.36x	095.016.53.15.62	-	○	-	light pink	-	-	0.08	21.0	1.6	15.0	11.0	1 g
xxx.32x-xxx.44x	065.252	-	-	○	-	-	-	0.50	8.5	1.0	14.8	9.0	1 g

Example **Type** + **Material no.** = **Ordering no.**
for ordering: 065. 265 + 56 = 065. 265. 56



Nozzle valve systems for variable atomization of very small liquid volumes

VarioSpray

VarioSpray HP

The HP valve range can be used to atomize a wide variety of liquids. All parts that come into contact with liquids are made of stainless steel, thereby complying with EC 1935/2004 and FDA regulations.

VarioSpray II

Nozzle valves in the VarioSpray II range can efficiently atomize the most miniscule liquid volumes. Their size makes these valves ideal for use in tight spaces. VarioSpray II is also available in a food version that complies with EC 1935/2004 and FDA regulations.

Applications:

Application of oil for applying seasonings, web humidification, release agent application, humidification.



VarioSpray HP
High Performance



VarioSpray II

Suitable control units for each nozzle system



Control unit VarioSpray HP



Control unit VarioSpray II

Benefits across the board

Flexibility

The Lechler VarioSpray system is completely modular, allowing it to be adapted to individual requirements as flexibly as possible.

The result is a perfectly coordinated product portfolio including

- Optimum valve control by perfectly matched electronic components
- Modular spray headers
- Various predefined Lechler control concepts
- Individual advice from our sales personnel

Resource and cost savings

The aerosol-free atomization of small and minimal liquid volumes offers specific benefits for spray nozzle operation. The fact that no atomization air is used means a huge reduction in rebound effects.

The following costs are reduced as a result:

- Installation cleaning
- Operating costs of extraction systems
- Liquid losses because the liquid to be atomized is applied to the product in a more targeted manner

Minimal amounts

Thanks to the use of pulse-width-modulated valves, even the smallest liquid quantities can be hydraulically atomized with maximum precision.

This control method permits

- flexible and immediate response to changed ambient parameters (e. g. belt speed)
- uniform jet and spray quality
- further application benefits due to a significantly increased turn-down ratio



Nozzle valve systems for variable atomization of very small liquid volumes

VarioSpray

Innovative and flexible spraying technology opens up new applications

Faster, more precise and now more sustainable. The demand for more efficient production processes is increasing in almost every industry. Even already extremely efficient spraying processes are affected – particularly when spraying very small liquid volumes.

Pneumatic atomizing systems are often used here because very small flow rates can be achieved using compressed air. However, this often makes control and installation extremely complex. Additionally, the use of air can have an unfavorable effect on operating costs. Aerosols may also be formed and liquid is lost due to the rebound effect.

With the VarioSpray II and VarioSpray HP hydraulic pulse-width-modulated nozzle valve systems, Lechler offers two alternatives that are as versatile as they are reliable.

With hydraulic nozzle systems, the narrowest cross section of the spray nozzle determines the liquid flow rate. For reasons of economy and production, however, arbitrary reduction of this narrowest cross section is not possible.

Instead, we use flexible timing of the spray duration to realize minimal flow rates – without the need for an expensive and complex pneumatic atomizing system.

In addition to the VarioSpray II and VarioSpray HP nozzle valve systems, a control unit is also required to permit simple modification of the pulse width and cycle frequency.

Your benefits

- Simple adjustment of the pulse width and cycle frequency
- Flushing function
- Modular design and modular system
- Start/stop signal (e.g. via light barrier)
- Individual valve control for VarioSpray HP

Product features

Minimum flow rates

- Liquid saving
- No expensive, complex twin-fluid system

Cycle frequency up to 200 Hz for VarioSpray HP, up to 100 Hz for VarioSpray II

- Flexible belt speeds

High turn-down ratio up to 29:1 with VarioSpray HP, up to 11:1 with VarioSpray II

- Wide range of flow rates covered by one nozzle

Continuously variable flow rate

- Flexible adjustment of the volume applied for different products

Different flow rates have no influence on spraying parameters

- Constant spray angle
- Uniform droplet size

Flow rate is not regulated by pressure

- No high pressure required
- Simple setup

No atomization air

- No aerosol formation
- Reduced loss of liquid

Food-compliant

- Spraying/humidification of foods

Your benefit

- ➔ Reduced costs
- ➔ Greater efficiency

- ➔ Increased productivity
- ➔ Shorter production time

- ➔ More flexible production

- ➔ Shorter product change-over times

- ➔ Constant process parameters

- ➔ Short installation time
- ➔ Low maintenance requirement
- ➔ Low operating costs

- ➔ Reduced risks to health
- ➔ No environmental pollution
- ➔ Reduced costs

- ➔ Compliance with legal requirements

What is pulse width modulation?

Pulse width modulation refers to the variation of the ON time t_{on} / OFF time t_{off} of a square-wave signal when the frequency f remains constant. Here, the frequency f corresponds to the reciprocal value of the period duration T .

The ratio of the ON time t_{on} to the period duration T is referred to as the pulse width ratio (DC = duty cycle). The pulse width ratio determines the flow rate. The valve is open during the ON time t_{on} . The shorter the DC, the less the flow rate.

Depending on the frequency selected, the pulsation is barely visible to the human eye.

Pulse width ratio 90%



Pulse width ratio 10%



YOU WILL FIND OTHER NOZZLES FOR USE IN THE FOOD AND BEVERAGE INDUSTRY IN OUR STANDARD CATALOGUE ...

The catalogue „Precision Spray Nozzles and Accessories“ is a sought-after manual of nozzle technology.

It contains valuable working aids and extensive technical information on Lechler products and ordering instructions.



Pneumatic atomizing nozzles	Series	Spray-pattern supply	Mode of liquid	Mixing of Fluids		$\dot{V}$ Water [l/h]	Application/Construction	Catalogue Page
	166	Full cone or Flat fan	Pressure principle	inside or outside	20° 45° 60° 80°	0.10 – 132.90	Humidification of air, cooling, disinfection (e.g. bottles), coating, dosing, release agent applications.	1.5

Flat fan nozzles	Series		$\dot{V}$ [l/min] at p = 2 bar	Connection	Application/Construction	Catalogue Page
	610	20° 30° 45° 60° 75° 90° 120°	0.05 – 4.00	1/8 BSPP	Cleaning (e.g. surfaces, filters, belts), crate washers, lubricating, coating. Compact design, suited for narrow installation conditions.	4.11
	612	20° 30° 45° 60° 75° 90° 120°	0.05 – 16.00	1/4 BSPP	Cleaning (e.g. surfaces, filters, belts), crate washers, lubricating, coating. Compact design, suited for narrow installation conditions.	4.13

Solid stream nozzle	Series	$\dot{V}$ [l/min]	Connection	Application/Construction	Catalogue Page
	544	0.04 – 10.00	1/8 BSPT 1/4 BSPT	Cleaning installations. Optimized flow technology. Highest jet power. Solid stream jet.	5.4

... AND IN OUR SPECIAL BROCHURES

We have a collection of information, included in individual subject brochures, covering special nozzles that are also of particular interest to food and beverage.

All documents can be downloaded from our website at www.lechler.com. We would also be happy to send you the brochures.



Brochure „Tank and Equipment Cleaning Nozzles“



Brochure „Air Nozzles and Accessories“



Brochure „VarioSpray Nozzle valve system“



Brochure „Pneumatic Atomizing Lances“

ONLINE-SERVICES

FULL INFORMATION IS JUST A CLICK AWAY: THE LECHLER WEBSITE



Our website contains further information on our products as well as useful resources. In addition to technical data, there is also a product finder to help you in your search for the right nozzle.

www.lechler.com



3D DESIGN DATA FOR YOUR WORK



So you can work on your designs with reliable data from the outset, free 3D data on Lechler nozzles and accessories are available to you online.

<http://lechler.partcommunity.com>

Your advantages:

- Time-saving, immediate download of design drawings and technical data
- Simple, fast product selection
- Preview function with product photo and 3D graphics
- All popular 3D formats available
- Free use following one-time registration



LECHLER INDUSTRY APP



Android (Google)



iOS (Apple)



All important calculation and conversion programs for nozzle technology combined in one App.


- Unit converter for pressure, volume and flow rate
- Pressure/flow rate calculator for single-fluid nozzles incl. axial-flow full cone nozzles
- Calculation of pipe diameters

FOR YOUR NOTES

**ENGINEERING
YOUR SPRAY SOLUTION**



LECHLER WORLD-WIDE

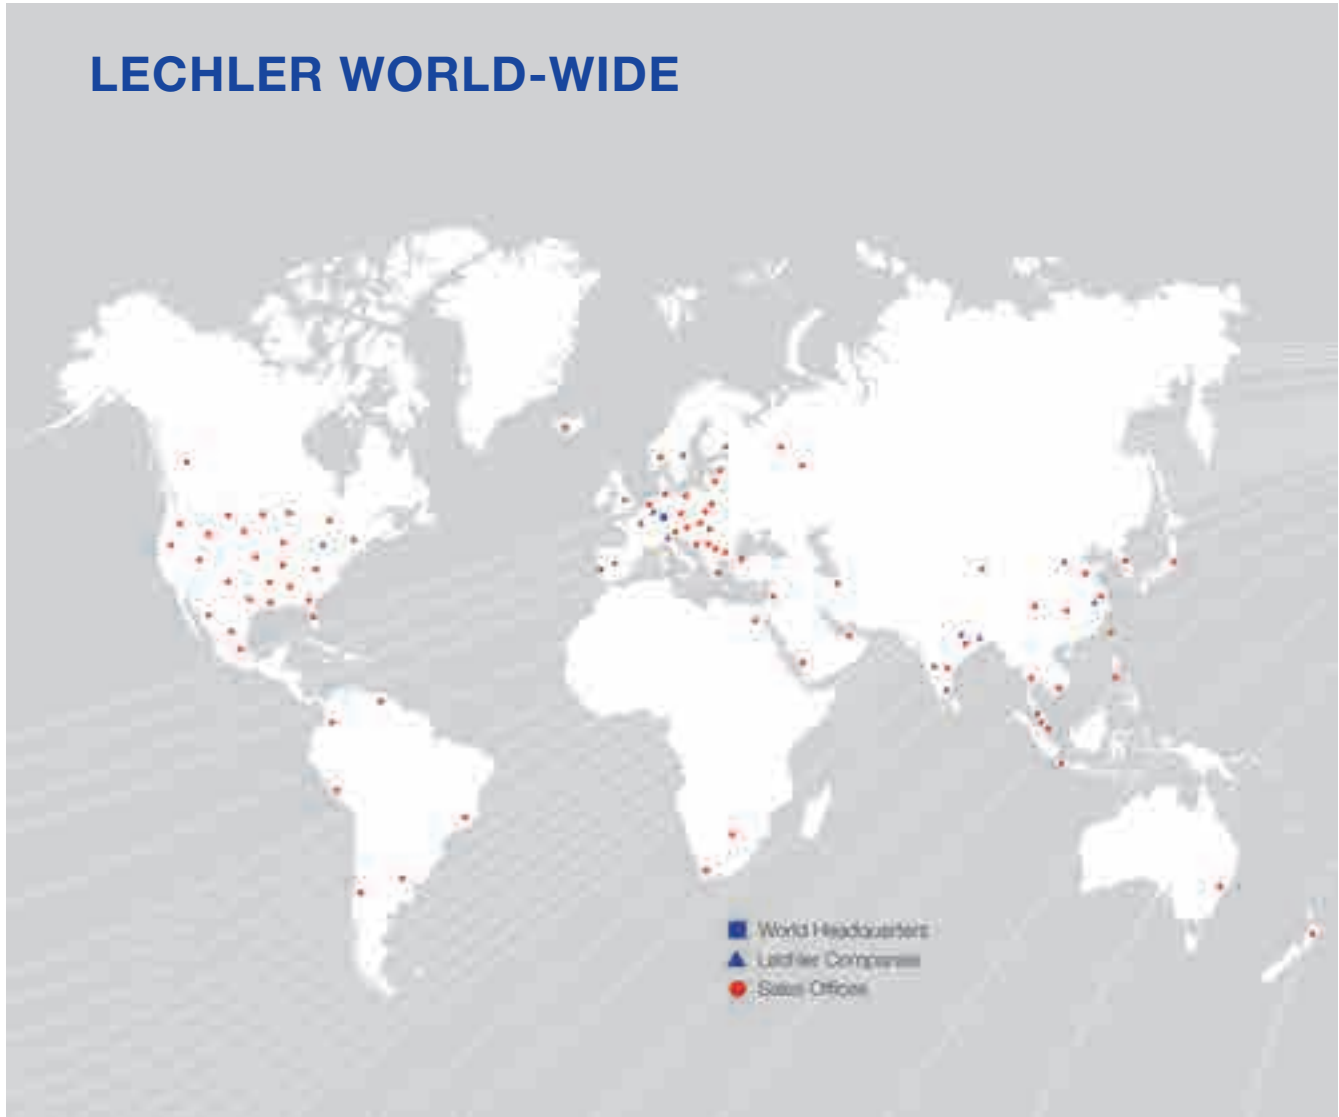

Lechler GmbH · Precision Nozzles · Nozzle Systems

P.O. Box 13 23 · 72544 Metzingen, Germany · Phone: +49 7123 962-0 · Fax: +49 7123 962-333 · info@lechler.de · www.lechler.com

Belgium: Lechler S.A./N.V. · Avenue Mercatorlaan, 6 · 1300 Wavre · Phone: +32 10 225022 · Fax: +32 10 243901 · info@lechler.be

China: Lechler Intl. Trad. Co. Ltd. · Beijing · Rm. 418 Landmark Tower · No. 8 Dong San Huan Bei Lu · Phone: +86 10 84537968, Fax: +86 10 84537458 · info@lechler.com.cn

Finland: Lechler Oy · Jäspilänkatu 18 · 04250 Kerava · Phone: +358 207 856880 · Fax: +358 207 856881 · info@lechler.fi

France: Lechler France, S.A. · Bât. CAP2 · 66-72, Rue Marceau · 93558 Montreuil cedex · Phone: +33 1 49882600 · Fax: +33 1 49882609 · info@lechler.fr

Great Britain: Lechler Ltd. · 1 Fell Street, Newhall · Sheffield, S9 2TP · Phone: +44 114 2492020 · Fax: +44 114 2493600 · info@lechler.com

India: Lechler (India) Pvt. Ltd. · Plot B-2 · Main Road · Wagle Industrial Estate · Thane (W) · 400604 · Phone: +91 22 40634444 · Fax: +91 22 40634497 · lechler@lechlerindia.com

Italy: Lechler Spray Technology S.r.l. · Via Don Dossetti, 2 · 20080 Carpiano (Mi) · Phone: +39 02 98859027 · Fax: +39 02 9815647 · info@lechleritalia.com

Malaysia: Lechler Spray Technology Sdn. Bhd. · No. 23, Jalan Teknologi 3/3A · Taman Sains Selangor 1 · Kota Damansara, PJU 5 · 47810 Petaling Jaya · Malaysia · info@lechler.com.my

Sweden: Lechler AB · Kungsängsvägen 31 B · 753 23 Uppsala · Phone: +46 54 137030 · Fax: +46 54 137031 · info@lechler.se

Spain: Lechler S.A. · Avda. Pirineos 7 · Oficina B7, Edificio Inbisa I · 28700 San Sebastián de los Reyes, Madrid · Phone: +34 91 6586346 · Fax: +34 91 6586347 · info@lechler.es

USA: Lechler Inc. · 445 Kautz Road · St. Charles, IL. 60174 · Phone: +1 630 3776611 · Fax: +1 630 3776657 · info@lechlerUSA.com